




Jacob®

PA 6

PERFECT

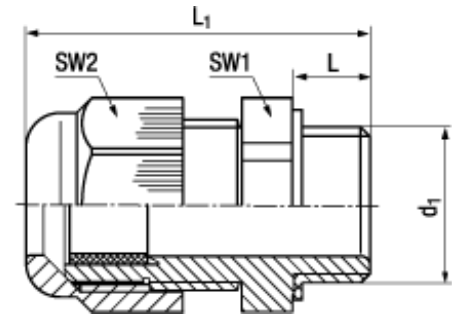

BN 22066

Cable glands

with metric thread

standard

Polyamide PA 6

- Dome nut: polyamide PA 6 V-2
- Sealing ring: polychloroprene-Nitrile rubber CR/NBR
- Gland body: polyamide PA 6 V-2
- Connecting thread: metric, as per EN 60423
- Integrated anchorage, wide sealing and clamping range, easy-to-install
- Temperature range: -20 °C / +100 °C (dynamic)
- Temperature range: -40 °C / +100 °C (static, short term)
- Protection grade: IP68 - 5 bar



Test standard: EN 62444 / UL 514B
 VDE licence: 40020902
 UL/CSA-File: E140310

from M32: with flat sealing ring

Article#	d ₁	Clamping range	SW1	SW2	L	L ₁	RAL	Color	Code
3692881	M12x1,5	3-6,5	15	15	8	31	7001	■	50.612PA/7001
3692885							7035	■	50.612PA/7035
3692870							9005	■	50.612PA/SW
3692875	M16x1,5	5-9,5	20	20	8	35,5	7001	■	50.616PA/7001
3692887							7035	■	50.616PA/7035
3692889							9005	■	50.616PA/SW
3692882	M20x1,5	8-13	24	24	8	36	7001	■	50.620PA/7001
3692876							7035	■	50.620PA/7035
3692873							9005	■	50.620PA/SW
3692872	M25x1,5	11-17	29	29	8	43	7001	■	50.625PA/7001
3692886							7035	■	50.625PA/7035
3692868							9005	■	50.625PA/SW
3692879	M32x1,5	15-21	36	36	10	50	7001	■	50.632PA/7001
3692871							7035	■	50.632PA/7035
3692888							9005	■	50.632PA/SW
3692880	M40x1,5	19-28	46	46	10	51	7001	■	50.640PA/7001
3692866							7035	■	50.640PA/7035
3692869							9005	■	50.640PA/SW
3692867	M50x1,5	27-35	55	55	12	61,5	7001	■	50.650PA/7001
3692884							7035	■	50.650PA/7035
3692878							9005	■	50.650PA/SW

from M32: with flat sealing ring

Article#	d ₁	Clamping range	SW1	SW2	L	L ₁	RAL	Color	Code
3692883	M63x1,5	32-42	68	68	12	65,5	7001	■	50.663PA/7001
3692874							7035	■	50.663PA/7035
3692877							9005	■	50.663PA/SW