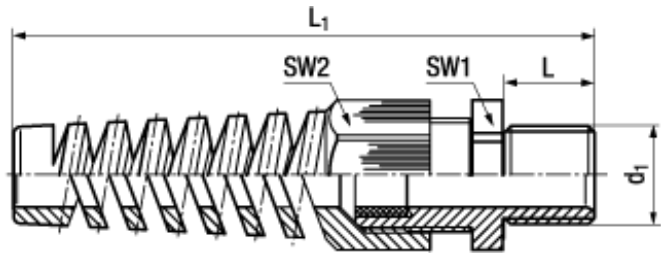


PERFECT


**BN 22080**
**Cable glands**

with metric thread and spiral top

Polyamide PA 6

- Dome nut: polyamide PA 6 V-2
- Sealing ring: polychloroprene-Nitrile rubber CR/NBR
- Gland body: polyamide PA 6 V-2
- Connecting thread: metric, as per EN 60423
- With spiral top, for movable flexible cables, integrated anchorage, wide sealing and clamping range, easy-to-install
- Temperature range: -20 °C / +100 °C (dynamic)
- Temperature range: -40 °C / +100 °C (static, short term)
- Protection grade: IP68 - 5 bar


 Test standard: UL 514B  
 UL/CSA-File: E140310

Article#	d <sub>1</sub>	Clamping range	SW1	SW2	L	L <sub>1</sub>	RAL	Color	Code
3690765	M12x1,5	3-6,5	15	15	8	63,5	7001	■	50007M12PABS
3690761							7035	■	50007M12BS7035
3690763							9005	■	50007M12BSSW
3690760	M16x1,5	5-10	22	22	15	94,5	7001	■	50011M16PABS
3690758							7035	■	50011M16BS7035
3690751							9005	■	50011M16BSSW
3690757	M20x1,5	6-12	24	24	11	101,5	7001	■	50013M20PABS
3690755							7035	■	50013M20BS7035
3690759							9005	■	50013M20BSSW
3690752		10-14	27	27	15	116	7001	■	50016M20PABS
3690753							7035	■	50016M20BS7035
3690754							9005	■	50016M20BSSW
3690756	M25x1,5	13-18	33	33	15	132,5	7001	■	50021M25PABS
3690762							7035	■	50021M25BS7035
3690764							9005	■	50021M25BSSW