

data sheet

system: Lithium-Ion-Battery

nominal voltage: 7.4V

end charge voltage: 8.4V

max. charge current: 720mA

charge conditions
 standard charge: 360mA for 3.5h min.
 fast charge: 720mA for 2.5h min.
 charging method: CC-CV (constant current and constant voltage)

capacity after standard charge
 nominal: 720mAh at 0.2C discharge to 5.5V
 minimal: 720mAh at 0.2C discharge
 650mAh at 1C discharge

energy: 5.3Wh

max. continuous discharge current: 720mA

internally safety system: protection circuit board (pcb) with protection against overcharge, deep discharge and overload


life time expectancy: > 300 cycles


ambient temperature range
 charge: 0...45°C
 discharge: -20...60°C
 long term storage: -20...35°C (less than 1 year)

QCT3: 620/590

weight: approx. 42g

dimensions: L1: 33.6 ± 0.3mm
 L2: 16.3 ± 0.2mm
 h1: 45.3 ± 0.3mm

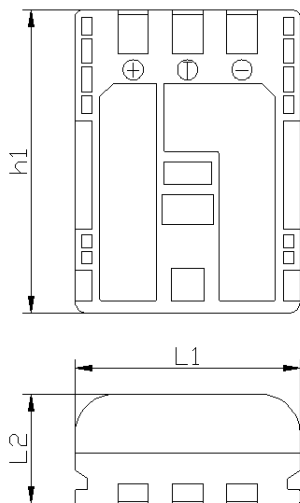

	Specifications for model/type:	A – Can NB-2LH
	Ansmann drawing number / part number:	5022673
	supplier no.:	701556
	author / date:	TG / 28.10.2013