




**CHAMP**

TE Internal #: 553443-2

PCB D-Sub Connectors, Receptacle, Cable-to-Board, 50 Position, 2.16 mm [.085 in] Centerline, 2 Row, Standard Profile, Vertical, PCB Mount Retention

[View on TE.com >](#)

Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors > D-Sub Recpt Assy Vert Action Pin, 2.16mm

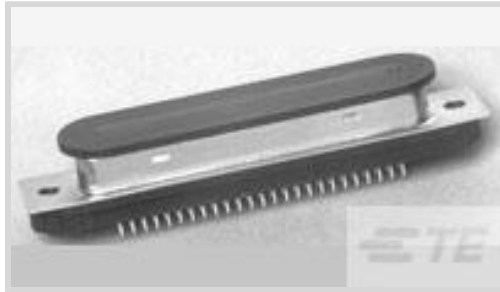

Connector & Housing Type: **Receptacle**

Connector System: **Cable-to-Board**

Number of Positions: **50**

Centerline (Pitch): **2.16 mm [.085 in]**

Number of Rows: **2**

[All D-Sub Recpt Assy Vert Action Pin, 2.16mm \(10\)](#)

**Features**

**Product Type Features**

Grounded	No
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Shielded	No
Product Type	Connector
Orientation	Standard

**Configuration Features**

Number of Positions	50
Number of Rows	2
PCB Mount Orientation	Vertical
Preloaded	Yes

**Body Features**

Connector Profile	Standard
Color	Natural

**Contact Features**



Contact Mating Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	3 A
Contact Mating Area Plating Thickness	.76 $\mu$ m

### Termination Features

Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Termination Post Length	4.58 mm

### Mechanical Attachment

Panel Attachment Style	Rear Mount
Panel Mount Feature	With
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail
Mating Retention	Without
Connector Mounting Type	Board Mount
Mounting Hole Diameter	3.3 mm

### Housing Features

Centerline (Pitch)	2.16 mm [.085 in]
Housing Material	Polyester
Housing Color	Black

### Dimensions

Row-to-Row Spacing	4.06 mm [.16 in]
PCB Thickness (Recommended)	1.57 – 3.18 mm [.062 – .125 in]

### Usage Conditions

Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
-----------------------------	-----------------------------

### Operation/Application

Circuit Application	Signal
---------------------	--------

### Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

### Packaging Features

Packaging Method	Tray
Packaging Quantity	30



## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUN 2020 (209) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts

 <p>TE Part # 553443-4 ASSY RCPT,ACTION PIN,CHAMP-LOK</p>	 <p>TE Part # 553444-4 PLUG ASSY,ACTION PIN,CHAMP-LOK</p>
--	---

## Customers Also Bought



TE Part #1-103577-7  
MACH APL BAND W/POST 15 DPLX



TE Part #1-85839-2  
12 MODI HDR SRST .156CL




TE Part #147381-2  
20 50/50 HDR SMT.250 W/HD VC



TE Part #390102-2  
SHUNT, MULTI-POS 2X3 W/HANDLE



TE Part #5-292230-4  
1.5 MINI CT SGL V SMT W/BOSS 4

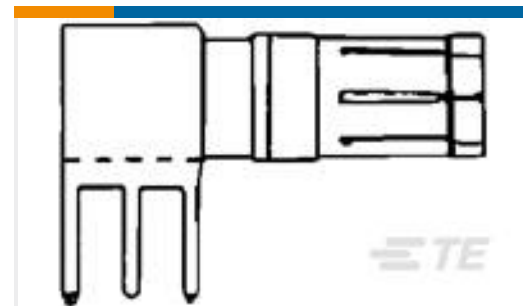

TE Part #532823-1  
HDI POWER CONTACT ASSY



TE Part #60348-4  
050 PIN REC 24-20 0126TPPHBZ



TE Part #1-1879338-3  
CPF 0603 35K7 1% 50PPM 1K RL



TE Part #1-103329-4  
14 MODII HDR SRRA B/A .100CL

## Documents

### Product Drawings

[ASSY RCPT,ACTION PIN,CHAMP-LOK](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_553443-2\\_Z.2d\\_dxf.zip](#)

English

### 3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_553443-2\\_Z.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_553443-2\\_Z.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Product Specifications



### [Application Specification](#)

English

### [Application Specification](#)

English

### [CHAMP Action Pin Connectors](#)

English

---

### [Instruction Sheets](#)

#### [Instruction Sheet \(U.S.\)](#)

English

#### [AMP CHAMP ACTION PIN Connectors \(Preloaded\)](#)

English

---

### [Agency Approvals](#)

#### [CSA Certificate](#)

English