

Modular Signal Towers / KombiSIGN 71

**Signal tower KS71 BWM 24VAC/DC GN/RD**



|                  |                     |
|------------------|---------------------|
| <b>Part No.:</b> | <b>649.240.04</b>   |
| <b>Series:</b>   | <b>KombiSIGN 71</b> |

| <b>MECHANICAL DATA</b>       |                                |
|------------------------------|--------------------------------|
| Height                       | 270 mm                         |
| Diameter                     | 70 mm                          |
| Materials                    | PA-GF<br>PC                    |
| Dome colour                  | Green<br>Red                   |
| Housing colour               | Black                          |
| Protection category          | IP65                           |
| Connection                   | Spring-type terminal           |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG    |
| Cable entry                  | Through hole                   |
| Cable entry maximum          | d = 11 mm                      |
| Tension relief               | Not present                    |
| Type of fixing               | Base mounting<br>Wall mounting |
| Working temperature minimum  | -20°C                          |
| Working temperature maximum  | +50°C                          |
| Weight with packaging        | 227 g                          |
| Product weight               | 199 g                          |

| <b>ELECTRICAL DATA</b>      |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 60 mA              |
| Rated inrush current        | <500mA             |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |


| <b>OPTICAL DATA</b>  |                  |
|----------------------|------------------|
| Light source         | LED              |
| Light colour         | Green<br>Red     |
| Optical signal image | Permanent        |
| Service life optical | 50,000 h minimum |

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 71

**Signal tower KS71 BWM 24VAC/DC GN/RD**

**DRAWING**

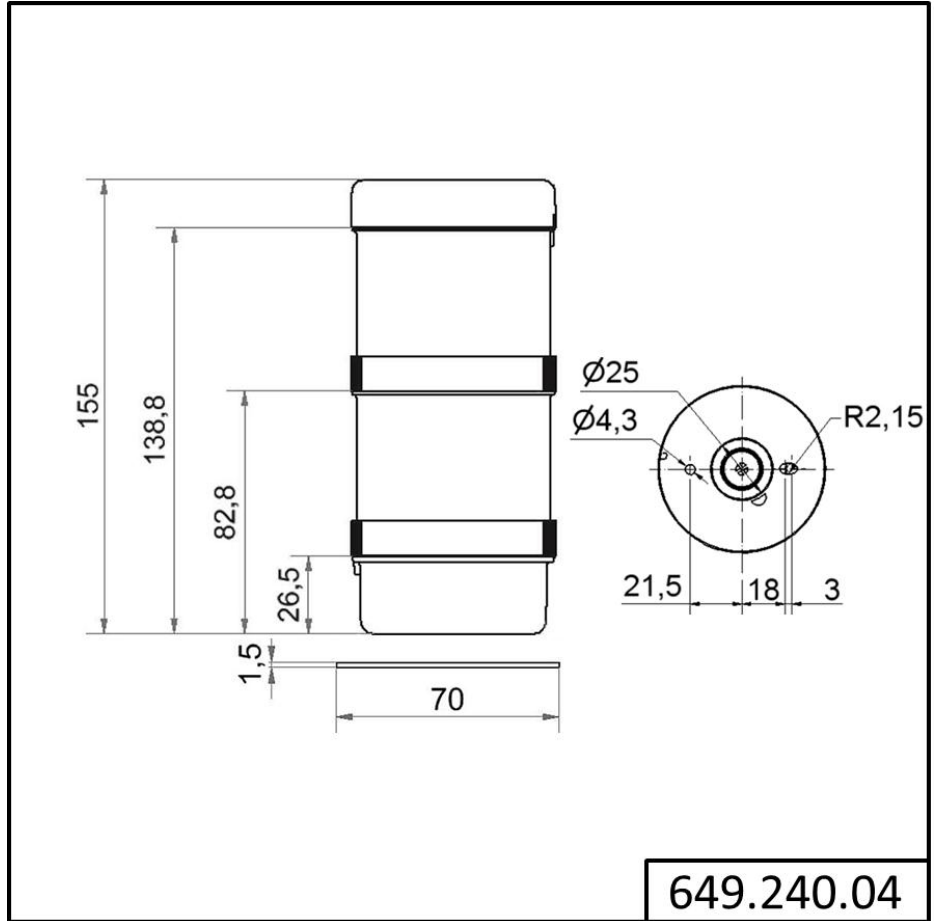

**649.240.04**



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.