


SLK-4N-S25

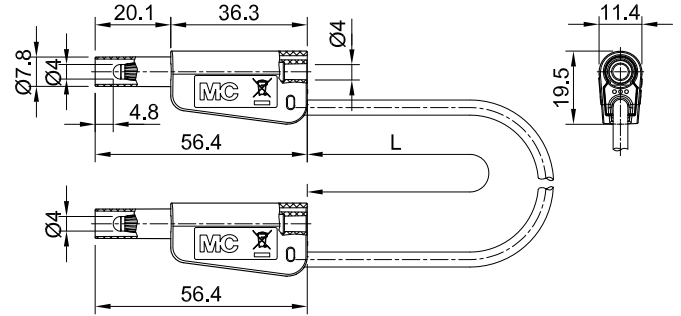

Item number 66.2016-*

Highly flexible, with stackable Ø 4 mm MULTILAM plugs with rigid insulating sleeve on both ends.

| Technical data | |
|--------------------------------------|---|
| Diameter of plug system | 4 mm |
| Rated Values | 1000 V, CAT II, 32 A / 600 V, CAT III, 32 A |
| Surface treatment electrical contact | Ni |
| Base material electrical contact | CuZn |
| Standard color(s) * | <input type="checkbox"/> 20 <input type="checkbox"/> 21 <input type="checkbox"/> 22 <input type="checkbox"/> 23 <input type="checkbox"/> 24 <input type="checkbox"/> 25 <input type="checkbox"/> 26 <input type="checkbox"/> 27 <input type="checkbox"/> 28 <input type="checkbox"/> 29 <input type="checkbox"/> 30 |
| Lead lengths <input type="text"/> | 025; 050; 075; 100; 150; 200 cm |
| Lead insulation | SIL |
| Lead cross section | 2,5 mm ² |
| Test accessory acc. to | IEC EN 61010-031 |
| Approvals | UL, CE |