

Shock-Safe Fuseholder, 6.3 x 32 mm, NF, Fingerrip, IP 68



250 VAC · 3.6W/16A (NF)



### Description

- IP 68 from front-side
- Screw type fuse carrier

### Standards

- NF C 93-436 - Modell HB14
- Contrôle de Conformité de Qualité (CCQ)


### References

Fuseholder to 172582

### Weblinks


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

Fuse-Link	6.3 x 32mm
Mounting	Panel Mount, Front Side
Attachment	Fixing Nut
Terminal	Solder
Rated Voltage	250 VAC
Rated current	16A (NF)
Rated Power Acceptance IEC	3.6W / 16A @ Ta 23 °C
Degree of Protection	IP 68
Admissible Ambient Air Temp.	-40 °C to 125 °C
Climatic Category	40/125/56 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Unit Weight	38 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Type, Rated Voltage, Rated current

Soldering Methods	Iron <a href="#">Soldering Profile</a>
Contact Resistance	< mΩ at 20 mV
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Torque on Fixing Nut	max 1.2 Nm
Plattendicke	max 5 mm

### Dimension

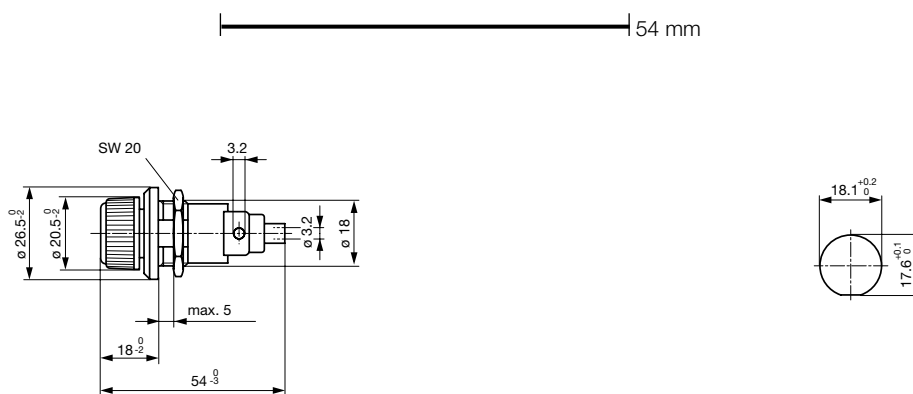

Mounting holes

**All Variants**

Holder	Cap	Degree of Protection	Order Number
●	Fingergrip	IP 68	7093.0110

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

---

**Packaging Unit**      Bulk (10 pcs.)

---