

4-Channel Analog Output Module ±10 V/0-10 V

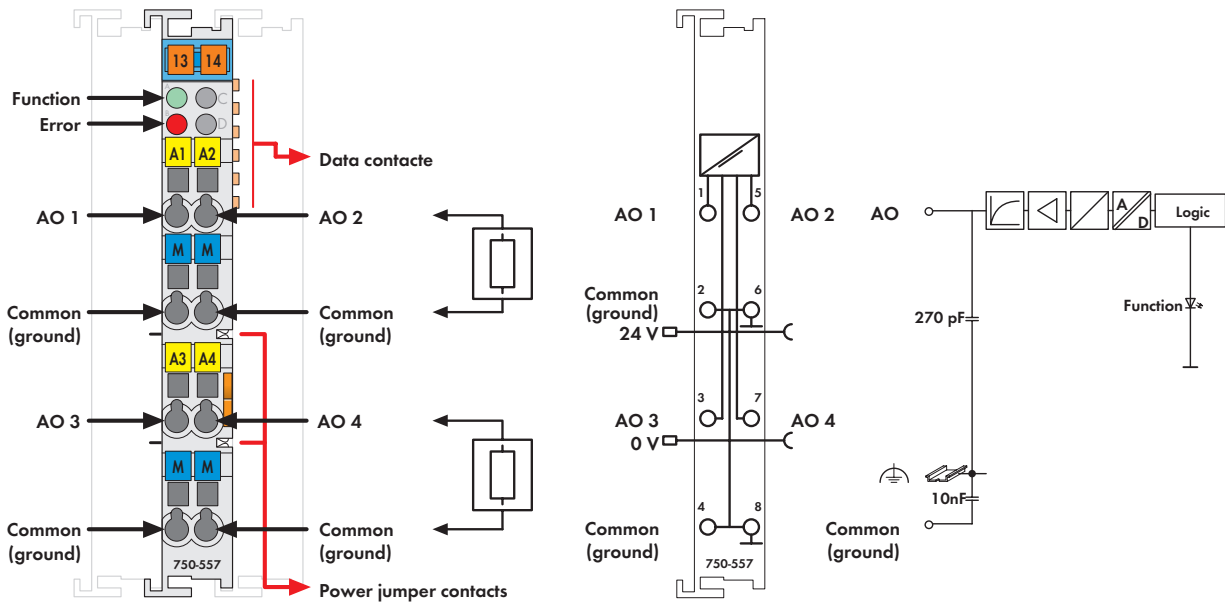


Fig. 750 Series/Technical data see page 24/Delivered without miniature WSB markers
750/753 Series marking see pages 10 ... 11 / 12 ... 13

The analog output module generates signals of a standard magnitude ±10V.

The output signal is electrically isolated and transmitted with a resolution of 12 bits.

The internal system supply powers the module.

The output channels of the module have a common ground potential.

Description	Item No.	Pack. Unit
4AO ± 10V DC	750-557	10 ¹⁾
4AO 0-10V DC	750-559	10 ¹⁾
4AO 0-10V DC/T	750-559/025-000	1
[Operating temperature -20 °C ... +60 °C]		
4AO ±10V DC (without connector)	753-557	10 ¹⁾
4AO 0-10V DC (without connector)	753-559	10 ¹⁾
1) Also available individually		
Accessories	Item No.	Pack. Unit
753 Series Connectors	753-110	25
Coding elements	753-150	100
Miniature WSB Quick marking system		
plain	248-501	5
with marking	see pages 352 ... 353	
Approvals	Also see "Approvals Overview" in Section 1	
Conformity marking	CE	
Shipbuilding (versions upon request)	ABS, BV, DNV, GL, KR, LR*, NKK*, PRS*, RINA* *753 Series, pending	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	75x-557, -559
EN 60079-0, -15	I M2 / II 3 GD Ex nA IIC T4	75x-557, -559
EN 61241-0, -1		

Technical Data	
No. of outputs	4
Max. current consumption (internal)	125 mA
Power supply	via system voltage DC/DC
Signal voltage	± 10V (750-557, 753-557) 0 - 10V (750-559, 753-559)
Load impedance	> 5 kΩ
Resolution	12 bits
Conversion time (typ.)	10 ms
Recovery time (typ.)	100 ms
Measuring error (25 °C)	< ± 0.1 % of the full scale value
Temperature coefficient	< ± 0.01 % /K of the full scale value
Isolation	500 V system/supply
Bit width	4 x 16 bits data 4 x 8 bits control/status (option)
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm ² ... 2.5 mm ² / AWG 28 ... 14
Stripped lengths, 750/753 Series	8 ... 9 mm / 0.33 in 9 ... 10 mm / 0.37 in
Width	12 mm
Weight	53.5 g
EMC: CE - immunity to interference	acc. to EN 61000-6-2 (2005)
EMC: CE - emission of interference	acc. to EN 61000-6-4 (2007)
EMC: marine applications	
- immunity to interference	acc. to Germanischer Lloyd (2003)
EMC: marine applications	
- emission of interference	acc. to Germanischer Lloyd (2003)