




Fieldbus connection D-Sub Input

Fieldbus connection D-Sub Output

Configuration and programming interface

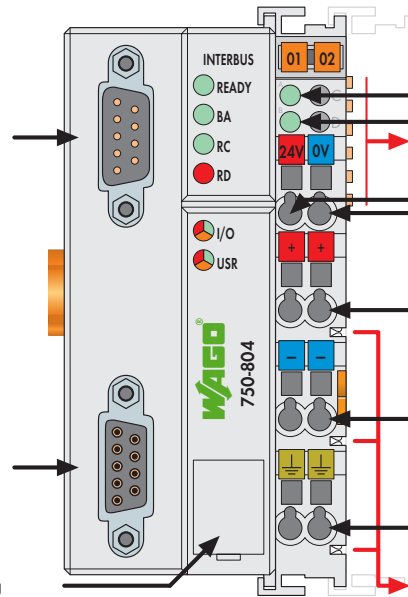

Status voltage supply
-System
-Power jumper contacts
Data contacts

Supply
24 V
0 V

Supply via power jumper contacts
24 V

0 V

⏏


Power jumper contacts

The INTERBUS PLC is an expansion for the WAGO-I/O-SYSTEM.



This controller combines the WAGO fieldbus coupler for INTERBUS with the functionality of a PLC. Programming PLC applications is performed in compliance with IEC 61131-3. The programmer can access all fieldbus and I/O data.

Features and applications:

- Use of decentralized control can better support a PLC or PC
- Complex applications can be divided into individually testable units
- Programmable fault response in the event of a fieldbus failure
- Signal pre-processing reduces fieldbus transmissions
- Peripheral equipment can be controlled directly, resulting in faster system response times
- Stand-alone, compact controller

Description	Item No.	Pack. Unit
Contr. INTERBUS	750-804	1
Accessories		
INTERBUS files	Download: www.wago.com	
Miniature WSB Quick marking system		
 plain	248-501	5
with marking	see pages 352 ... 353	
Standards and Approvals		
Standard	Also see "Approvals Overview" in Section 1	
Conformity marking	EN 50254	
Shipbuilding	CE	
UL 508	ABS, BV, DNV, GL, KR, LR, NKK, PRS, RINA	
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
IEC 60079-0, -15	BR-Ex nA II T4	
EN 60079-0, -15	I M2 / II 3 GD Ex nA IIC T4	
EN 61241-0, -1		

System Data	
No. of controllers connected to Master	256
Max. no. of I/O points	4096 (depends on master)
Transmission medium	Certified Cu cable
Max. length of fieldbus segment	400 m
Baud rate	500 Kbaud
Transmission time	typ. 1.43 ms (10 couplers; 32 digital I/Os per coupler)
Buscoupler connection	1 x D-Sub 9; plug for input interface 1 x D-Sub 9; socket for output interface
Programming	WAGO-I/O-PRO 32
IEC 61131-3	IL, LD, FBD, ST, FC

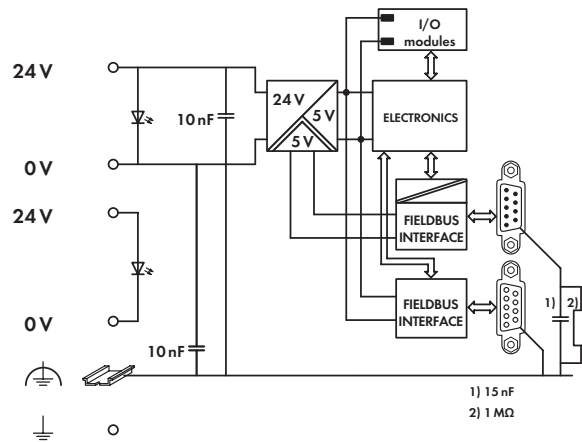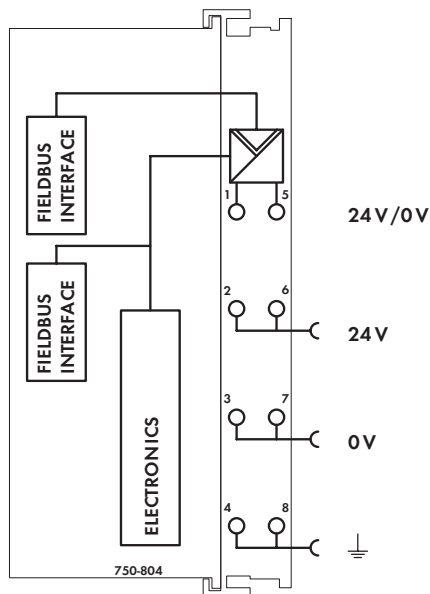

Technical Data

Number of I/O modules	64
Fieldbus	
Max. input process image	64 bytes
Max. output process image	64 bytes
Max. input variables	64 bytes
Max. output variables	64 bytes
Configuration	automatic
Program memory	128 Kbytes
Data memory	64 Kbytes
Non-volatile memory (retain)	8 Kbytes
Cycle time	< 3 ms for 1,000 statements / 256 dig. I/Os
Power supply	24 V DC (-15 % ... +20 %)
Max. input current (24 V)	500 mA
Efficiency of the power supply	87 %
Internal current consumption (5 V)	400 mA
Total current for I/O modules (5 V)	1600 mA
Isolation	500 V system/supply
Voltage via power jumper contacts	24 V DC (-15 % ... +20 %)
Current via power jumper contacts (max.)	10 A DC

General Specifications

Operating temperature	0 °C ... +55 °C
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm ² ... 2.5 mm ² / AWG 28 ... 14
Stripped lengths	8 ... 9 mm / 0.33 in
Dimensions (mm) W x H x L	51 x 65 x 100
	Height from upper-edge of DIN 35 rail
Weight	200 g
Storage temperature	-25 °C ... +85 °C
Relative air humidity (no condensation)	95 %
Vibration resistance	acc. to IEC 60068-2-6
Shock resistance	acc. to IEC 60068-2-27
Degree of protection	IP20
EMC: CE - immunity to interference	acc. to EN 61000-6-2 (2005)
EMC: CE - emission of interference	acc. to EN 61000-6-4 (2007)