

Data sheet | Item number: 762-3003

Web Panel; 25.7 cm (10.1"); 1280 x 800 pixels; 2 x USB, 2 x ETHERNET


www.wago.com/762-3003



Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

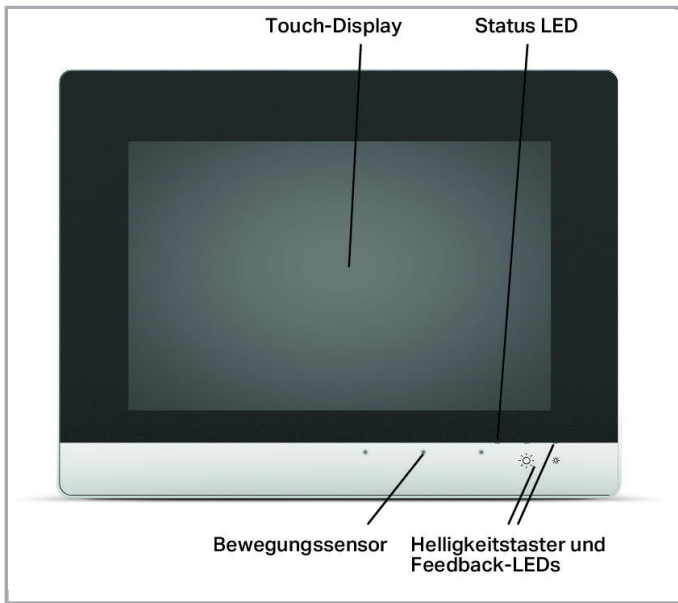

Item description

Specifically configured as a Web browser, the Web Panel directly connects to controllers with their own Webservers.

The *e!COCKPIT* (CODESYS 3) or CODESYS 2.3 Web visualization has been specifically optimized for the Web Panel.

Data

Technical Data

Display diagonal	25.7 cm (10.1 Inches)
Display	Resistive touchscreen
Display colors	16 million colors
Graphics resolution	(1280 x 800) px
Contrast ratio	800:1
Viewing angle (horizontal/vertical)	85° / 85°
Brightness	800
HBT (Half Brightness Time)	70,000 h
Visualization	Web Visu
ETHERNET protocols	DHCP DNS FTP FTPS HTTP HTTPS SSH
Communication	Web browser (CODESYS2)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Operating system	Linux [®]
Processor	ARM [®] Cortex™ A8 600 MHz
Main memory (RAM)	512 MB
Internal memory (flash)	1024 MB
Memory card type	microSD (max. 2 GB); microSDHC (max. 32 GB)
Baud rate	ETHERNET: 10/100 Mbit/s
Indicators	Three-color LED (red, green, blue)
Controls	Resistive touch panel, two capacitive keys, proximity sensor
Supply voltage	SELV DC 24 V (18 ... 31.2 V); with reverse voltage protection
Max. input current (24 V)	390 mA
Operating power	9.9 W (max.)

Connection data

Connection technology: communication/fieldbus	Modbus TCP: 2 x RJ-45; USB: 2 x USB 2.0 host (type A)
---	---

Geometrical Data

Width	293 mm / 11.535 inch
Height	223 mm / 8.78 inch
Depth	58 mm / 2.283 inch
Panel cutout (W x H)	(278 x 208) mm

Mechanical data

Weight	2138 g
Front panel	Anodized aluminum, polyester film
Housing material	Anodized aluminum
Conformity marking	CE

Environmental Requirements

Surrounding air temperature (operation)	0 ... 50 °C
Surrounding air temperature (storage)	-20 ... 80 °C
Protection type	IP65
Note on protection type	IP65 (front side); IP20 (rear side), per EN 60529
Relative humidity (without condensation)	90 %
Mounting type	Clamping elements (included) or VESA mount (4 x M4x8)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

Commercial data



Packaging type	BOX
Country of origin	DE
GTIN	4055143356480
Customs tariff number	8471410000

Approvals / Certificates


Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	KC National Radio Research Agency	Article 58-2, Clause 3	MSIP- REM-W43- WBP762

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAA00001FS
	PRS Polski Rejestr Statków	-	TE/2190 /880590/18

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Counterpart

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Compatible products

assembling



Item no.: 762-9001

e!DISPLAY7300T ; Clamping elements (4 pieces)

www.wago.com/762-9001

memory card



Item no.: 758-879/000-3102

Memory Card SD Micro; 2 GByte

www.wago.com/758-879[/000-3102](http://www.wago.com/000-3102)

Downloads

Documentation

Manual

e!DISPLAY 7300T, Web Panel WP 10.1 1280x800 PIO 1	V 1.1.0	pdf 2.2 MB	Download
--	---------	---------------	----------

Bid Text

762-3003 GAEB X81 - Datei	2019.19.2	xml 5.2 kB	Download
762-3003 doc - Datei	2016.8.1	doc 30.2 kB	Download

System Description

Operation and Monitoring – General Product Information		pdf 795.2 kB	Download
Overview on WAGO-I/O-SYSTEM 750 approvals		pdf 780.2 kB	Download

Runtime Software

Firmware

Firmware: 762-3003 Web Panel; 25.7 cm (10.1"); 1280 x 800 pixels; 2 x USB, 2 x ETHERNET	04 2019.31.10	zip 99.5 MB	Download
---	------------------	----------------	----------

CAD/CAE-Data

Subject to changes. Please also observe the further product documentation!



CAD data

2D/3D Models 762-3003	URL	Download
-----------------------	-----	----------

CAE data

EPLAN Data Portal 762-3003	URL	Download
----------------------------	-----	----------

WSCAD Universe 762-3003	URL	Download
-------------------------	-----	----------

ZUKEN Portal 762-3003	URL	Download
-----------------------	-----	----------

Installation Notes

Product family

DISPLAY 7300T
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!