



## Adapter cable

Item No.: 771-5001/174-000



Adapter cable

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	771-5001/174-000
GTIN / EAN	4055143261197
Content	1
Order amount	1
Customer item number	

### Notes

All WINSTA® components are 100% protected against mismatching in terms of: a.) plugging different number of poles b.) plugging when turned by 180° c.) plugging when laterally staggered d.) plugging one pole  
 Note on Continuous Service Temperature: -35°C ... +85°C  
 PVC cable for temperatures 70 °C (including halogen-free)  
 Insulating parts for temperatures 105 °C  
 Mating cycles: 100, with resistive load  $I_N = 25A$ , tested (4 mm<sup>2</sup>/AWG 12)


### Technical data

#### Miscellaneous

Pin spacing	10 mm (0.394 in)
Color	blue
Connector color	blue

Technical data	
Coding	I
Rated impulse voltage (III / 3) [kV]	4 [kV]
Pollution degree (1)	3
Legend for ratings	(III / 3) Overvoltage category III /
Mating cycles	200, without resistive load
Strip length	9 mm / 0.35 Inch
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Unmating force of a plug-in connection	when unlocked: approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	when locked: > 80N
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Contact material	Copper or copper alloy, surface-treated
Processing temperature	-5°C ... +40°C
Fire load [MJ]	90.138 [MJ]
Weight [g]	288.87 [g]

## Images & drawings

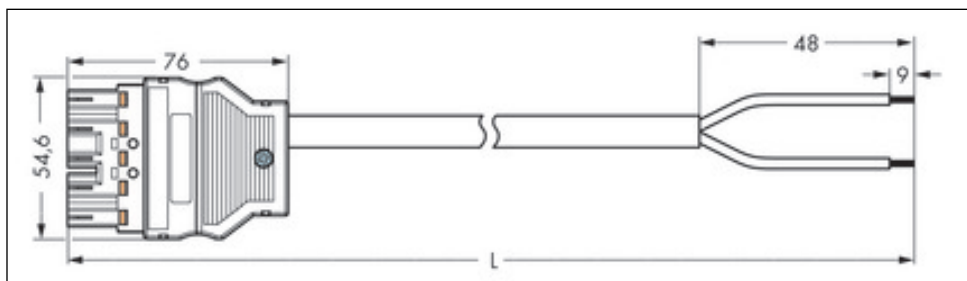

**Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.