



## Alkaline-Manganese Dioxide Battery

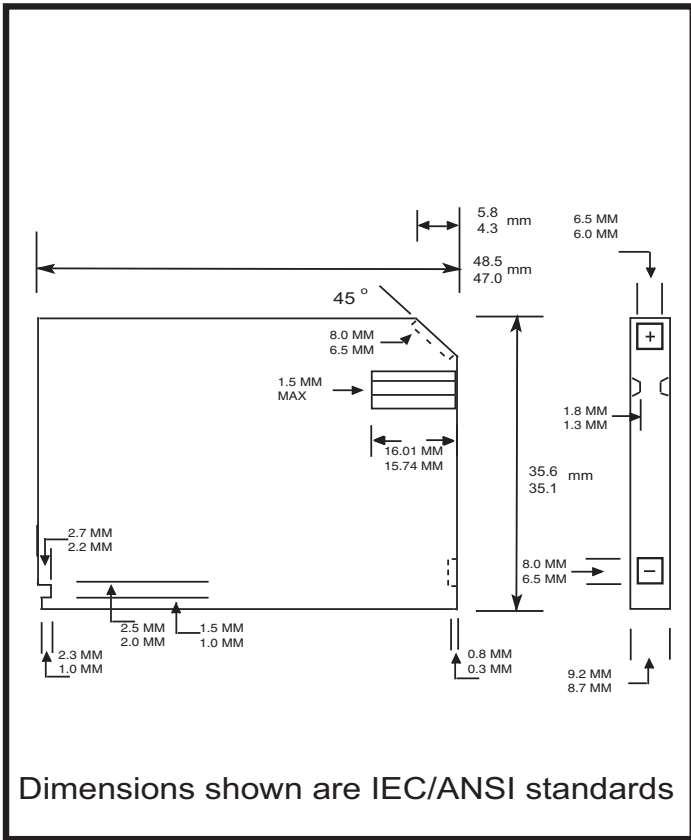

<b>Nominal Voltage:</b>	6 V
<b>Nominal Internal Impedance:</b>	1100 m-ohm @ 1kHz
<b>Average Weight:</b>	30.3 gm (1.1 oz.)
<b>Volume:</b>	15.1 cm <sup>3</sup> (0.92 in. <sup>3</sup> )
<b>Terminals:</b>	Flat
<b>Operating Temperature Range:</b>	-20°C to 54°C (-4°F to 130°F)
<b>ANSI:</b>	1412AP
<b>IEC:</b>	4LR61

**Typical Discharge Characteristics at 21°C (70°F)**

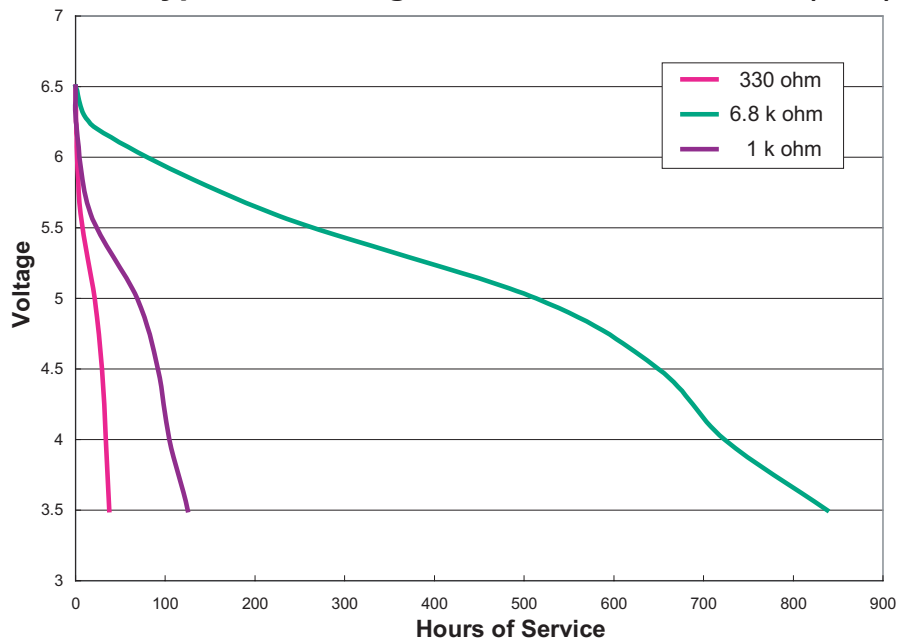

**DURACELL®**  
 BATTERIES

Berkshire Corporate Park  
 Bethel, CT 06801 U.S.A.  
 Telephone: Toll-free 1-800-544-5454  
 Internet: www.duracell.com

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the chart and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.