

WAVEFILTER 10A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Simple radio noise suppression in the cabinet thanks to WAVEFILTER**

The WAVEFILTER series eliminates the need for time-consuming bolting processes of mains filters. The filters are snapped onto TS 35 and connected to the device whose noise is to be suppressed. The two-stage, 22.5 mm wide WAVEFILTER, in 1 A, 3 A, 6 A and 10 A versions, offers high attenuation at all voltage levels from 5 V, 12 V, 24 V, 48 V, 60 V, 120 V up to 250 V.

General ordering data

Version	WAVESERIES, Surge protection, Surge protection, Attenuation at 100 MHz: 40 dB
Order No.	8614770000
Type	WAVEFILTER 10A
GTIN (EAN)	4032248277032
Qty.	1 pc(s).

WAVEFILTER 10A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	92.4 mm	Depth (inches)	3.638 inch
Height	112.5 mm	Height (inches)	4.429 inch
Width	22.5 mm	Width (inches)	0.886 inch
Net weight	142.12 g		

Temperatures

Storage temperature	-25 °C...55 °C	Operating temperature	-20 °C...40 °C
---------------------	----------------	-----------------------	----------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

General data

Colour	beige	Design	Wave 22.5 L
Height with TS 35	112.4 mm	Protection degree	IP20
Rail	TS 35	Segment	Power distribution
Version	Surge protection		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Attenuation at 0.15 MHz	< 0.5 dB	Attenuation at 1 MHz	70 dB
Attenuation at 10 MHz	52 dB	Attenuation at 100 MHz	40 dB
Capacitance	C _x : 470 nF / C _{and} : 4.7 nF	Fuse	10A
Inductance L and L1	0.8 mH	Leakage current at U _n	190 µA
Rated current I _N	10 A	Rated voltage (AC)	250 V
Rated voltage (DC)	250 V	Test voltage P-N	1700 V DC
Test voltage P/N-PE	2000 V AC	Voltage type	AC/DC

Connection data

Cross-section	2.5 mm ²	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	1.5 mm ²

Classifications

ETIM 6.0	EC002623	ETIM 7.0	EC002623
ETIM 8.0	EC002623	ECLASS 9.0	27-18-28-14
ECLASS 9.1	27-42-02-08	ECLASS 10.0	27-18-28-14
ECLASS 11.0	27-18-28-14	ECLASS 12.0	27-18-28-14

Data sheet**WAVEFILTER 10A**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E64388

Downloads

Approval/Certificate/Document of Conformity	EU_Konformitätserklärung / EU_Declaration_of_Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD
User Documentation	Operating instructions
Catalogues	Catalogues in PDF-format
Brochures	


WAVEFILTER 10A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Electric symbol

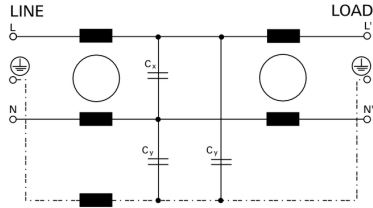

Circuit diagram

