

PSSR 24VDC/3PH AC 20A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image



- Load circuit: 3-phase 24...520 V AC / 20 A
- Ready-to-use: snap on - connect - ready
- Wear-free and silent switching
- High capacity for handling surge currents $I^2t = 1500$ A²s (10 ms)

General ordering data

Version	Power Solid-State Relais, Solid state contactor, Rated control voltage: 8...30 V DC / 10...30 V AC , Rated switching voltage: 24...520 V AC, Continuous current: 20 A @ 55 °C, 12 A (AC 53), Screw connection
Order No.	8952 130000
Type	PSSR 24VDC/3PH AC 20A
GTIN (EAN)	4032248743254
Qty.	1 pc(s).

Creation date April 20, 2022 2:59:20 PM CEST

Catalogue status 08.04.2022 / We reserve the right to make technical changes.

PSSR 24VDC/3PH AC 20A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	126.2 mm	Depth (inches)	4.968 inch
Height	98 mm	Height (inches)	3.858 inch
Width	89.6 mm	Width (inches)	3.528 inch
Net weight	943 g		

Temperatures

Storage temperature	-40 °C...100 °C	Operating temperature	-40 °C...80 °C
Humidity	40...85 % (indoor) no condensation		

Probability of failure

MTTF	228 Years
------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (cURus)	E360862
-------------------------	---------

Control side

Rated control voltage	8...30 V DC / 10...30 V AC	Nominal control current	15 mA at 8.5 V DC, 18 mA at 10 V AC/DC, 50 mA at 24 V AC/DC, 65 mA at 30 V AC/DC
Power rating	0.1...2 W	Pull-in/drop-out voltage, typ.	10 V / 4 V AC 8 V / 4 V DC
Status indicator	Green LED	Protective circuit	RC element, Varistor

Load side

Rated switching voltage	24...520 V AC	Continuous current	20 A @ 55 °C, 12 A (AC 53)
Rated switching current	20 A @ 55 °C	Load category	AC 53: 3 x 12 A
Inrush current	550 A	Pulse load, max. current	300 A (10 ms), non-recurrent
Load limit integral (I^2t) <10 ms	1,500 A ² s	Switch-on delay	30 ms
Switch-off delay	30 ms	Voltage drop at max. load	1.4 V
Leakage current	< 1 mA	Min. switching current	5 mA
Short-circuit-proof	No	Protective circuit, load side	Varistor, RC element
Contact type	3 NO contact (Triac (zero-cross switch))	Output voltage frequency range	50 / 60 Hz
max. switching frequency (AC control voltage)	10 Hz	max. switching frequency (DC control voltage)	10 Hz

General data

Version	3-phase with heat sink mounted	Rail	TS 35
Colour	black		

Creation date April 20, 2022 2:59:20 PM CEST

Catalogue status 08.04.2022 / We reserve the right to make technical changes.

PSSR 24VDC/3PH AC 20A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Insulation coordination**

Pollution severity	2	Surge voltage category	III
Clearance and creepage distances for control side - load side	≥ 6.4 mm	Dielectric strength for control side - load side	4 kV _{eff}
Dialectric strength of load side - housing	3.3 kV _{eff}	Impulse withstand voltage	4 kV (1.2/50 μs)
Protection degree	IP20		

Further details of approvals / standards

Standards	DIN EN 60950, IEC 60947-4-3	Certificate No. (cURus)	E360862
-----------	-----------------------------	-------------------------	---------

Connection data (control side)

Nom. rated connection clamping range (control side)	1.5 mm ²	Min. rated connection clamping range (control side)	0.75 mm ²
Max. rated connection clamping range (control side)	2.5 mm ²	Min. tightening torque (control side)	1.2 Nm
Max. tightening torque (control side)	2 Nm	Blade size (control side)	Gr. PZ2

Connection data (load side)

Nom. rated connection clamping range (load side)	10 mm ²	Min. rated connection clamping range (load side)	1.5 mm ²
Max. rated connection clamping range (load side)	10 mm ²	Min. tightening torque (load side)	2 Nm
Max. tightening torque (load side)	3 Nm	Blade size (load side)	Gr. PZ2

Connection data

Wire connection method	Screw connection
------------------------	------------------

Classifications

ETIM 6.0	EC002055	ETIM 7.0	EC002055
ETIM 8.0	EC002055	ECLASS 9.0	27-37-10-14
ECLASS 9.1	27-37-10-14	ECLASS 10.0	27-37-10-14
ECLASS 11.0	27-37-10-14		

Approvals

Approvals



ROHS	Conform
UL File Number Search	E360862

PSSR 24VDC/3PH AC 20A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD
User Documentation	Beipackzettel / Package Insert – multilingual
Catalogues	Catalogues in PDF-format
Brochures	


PSSR 24VDC/3PH AC 20A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Drawings

Wiring diagram




Graph

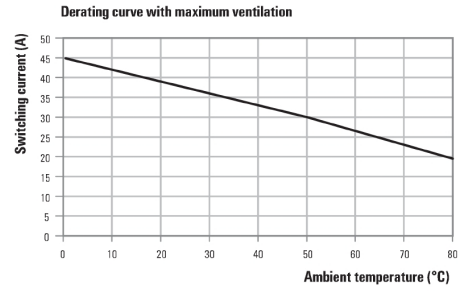


DC load limit curve Low ventilation

Graph

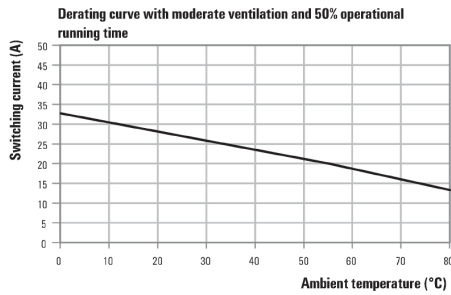

DC load limit curve

Graph

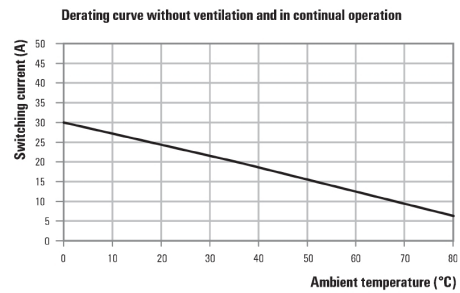

DC load limit curve

Dimensional drawing

