


**WINSTA® Boxes**  
**Distribution, Three-Phase to Single-Phase Current (400 V/230 V)**  
 Through Wiring (5-Pole), 6 Outputs (3-Pole), Coding A, WINSTA® MIDI

**Description:**

The phases L<sub>1</sub>, L<sub>2</sub> and L<sub>3</sub> of the three-phase current are divided into 3 single-phase circuits with 2 outputs each.

I<sub>N</sub> 25 A  
 250 V / 4 kV / 3  
 400 V / 6 kV / 3  
 Internal wiring: 4 mm<sup>2</sup>

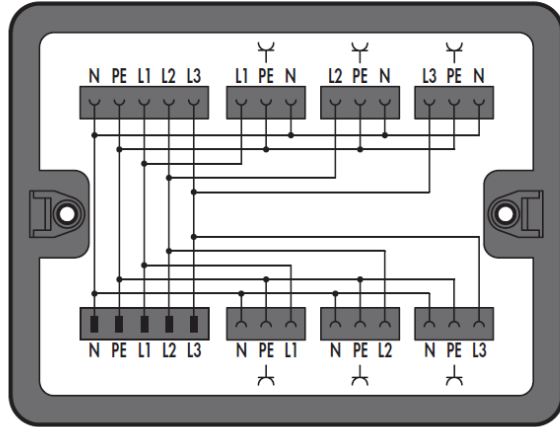

|                             |   |                         |       |                 |            |
|-----------------------------|---|-------------------------|-------|-----------------|------------|
| WINSTA®<br>Distribution Box |  | Item                    | Color | Item No.        | Pack. Unit |
|                             |   | Distribution box, black | ●     | 899-631/100-000 | 1          |

**Description**  
**Remarks**

Distribution box; Distribution; Three-phase to single-phase (400 V / 230 V); Through, 5-pole; 6 outputs, 3-pole; Coding A

**Item description:**

The phases L<sub>1</sub>, L<sub>2</sub> and L<sub>3</sub> of the 3-phase current are divided into three single-phase circuits with two outputs each.

All WINSTA® components are 100% protected against mismatching in terms of:

- plugging different number of poles
- plugging when turned by 180°
- plugging when laterally staggered
- plugging one pole

**Note on Continuous Service Temperature:**

-35°C ... +85°C

PVC cable for temperatures ≤ 70 °C (including halogen-free)

Insulating parts for temperatures ≤ 105 °C

**Item properties**

| Miscellaneous                          |   |      |
|--|---|------|
| Name                                   | Value   | Unit |
| Color                                  | black   |      |
| Rated voltage (III / 3) [V]            | 400   | V    |
| Rated impulse voltage (III / 3) [kV]   | 6   | kV   |
| Pollution degree (1)                   | 3   |      |
| Rated current [A]                      | 25  | A    |
| Rated voltage (III / 3) 2 [V]          | 250   | V    |
| Rated impulse voltage (III / 3) 2 [kV] | 4   | kV   |
| Legend for ratings                     | (III / 3) ≙ Overvoltage category III /                      |      |
| Assembly                               | Interior area, e.g., intermediate floors, suspended ceiling |      |
| Insulating material                    | Polyamide 66 (PA 66)  |      |
| Flammability class per UL94            | V0  |      |
| Contact material                       | Copper or copper alloy, surface-treated                     |      |
| Processing temperature                 | -5°C ... +40°C  |      |
| Fire load [MJ]                         | 91.824  | MJ   |
| Weight [g]                             | 475   | g    |
| Width                                  | 190 mm / 7.48 Inch  |      |
| Height                                 | 30 mm / 1.181 Inch  |      |
| Depth                                  | 145 mm / 5.709 Inch   |      |
| Type of mounting                       | Wall screw adapter  |      |
| Mounting position                      | any   |      |