


## WINSTA® Boxes for Self-Assembly

**Description:**

This **WINSTA®** Distribution Box is designed for custom assembly/wiring and includes: 1 bottom, 1 lid, 2 sidewalls and 16 MIDI mounting pins.

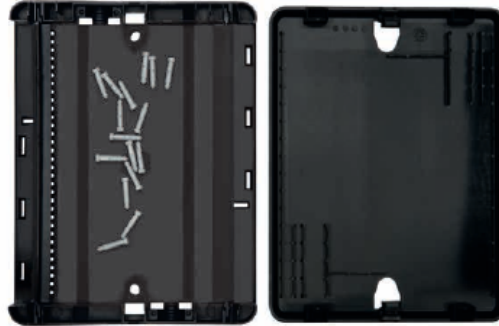


WINSTA®  
Distribution Box

Item	Color	Item No.	Pack. Unit
Distribution box, black	●	899-631	1
Distribution box, white	○	899-681	1

## with DIN 35 Rail for Self-Assembly

**Description:**

This **WINSTA®** Distribution Box is designed for custom wiring with an electronic module (1 module on DIN 35 rail) and includes: 1 bottom, 1 lid, 1 sidewall, 1 sidewall with DIN 35 rail and 10 MIDI mounting pins.

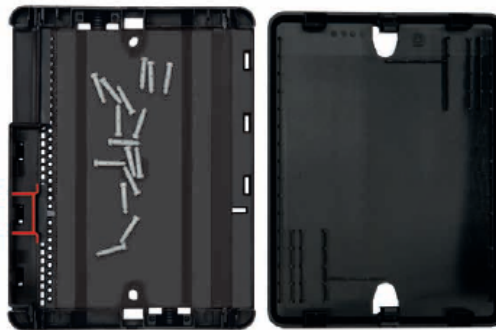

WINSTA®  
Distribution Box

Item	Color	Item No.	Pack. Unit
Distribution box, black	●	899-632	1
Distribution box, white	○	899-682	1

<b>Description</b>	Distribution box; Base type 1
<b>Remarks</b>	<p>All WINSTA® components are 100% protected against mismatching in terms of:</p> <p>a.) plugging different number of poles</p> <p>b.) plugging when turned by 180°</p> <p>c.) plugging when laterally staggered</p> <p>d.) plugging one pole</p> <p><b>Note on Continuous Service Temperature:</b></p> <p>-35°C ... +85°C</p> <p>PVC cable for temperatures ≤ 70 °C (including halogen-free)</p> <p>Insulating parts for temperatures ≤ 105 °C</p>

<b>Item properties</b>	<table border="1"> <thead> <tr> <th colspan="3">Miscellaneous</th> </tr> <tr> <th>Name</th> <th>Value</th> <th>Unit</th> </tr> </thead> <tbody> <tr> <td>Color</td> <td>black</td> <td></td> </tr> <tr> <td>Legend for ratings</td> <td>(III / 3 ) ± Overvoltage category III /</td> <td></td> </tr> <tr> <td>Assembly</td> <td>Interior area, e.g., intermediate floors, suspended ceiling</td> <td></td> </tr> <tr> <td>Insulating material</td> <td>Polyamide 66 (PA 66)</td> <td></td> </tr> <tr> <td>Flammability class per UL94</td> <td>V0</td> <td></td> </tr> <tr> <td>Contact material</td> <td>Copper or copper alloy, surface-treated</td> <td></td> </tr> <tr> <td>Processing temperature</td> <td>-5°C ... +40°C</td> <td></td> </tr> <tr> <td>Fire load [MJ]</td> <td>5.607</td> <td>MJ</td> </tr> <tr> <td>Weight [g]</td> <td>195.43</td> <td>g</td> </tr> <tr> <td>Width</td> <td>190 mm / 7.48 Inch</td> <td></td> </tr> <tr> <td>Height</td> <td>30 mm / 1.181 Inch</td> <td></td> </tr> <tr> <td>Depth</td> <td>145 mm / 5.709 Inch</td> <td></td> </tr> <tr> <td>Type of mounting</td> <td>Wall screw adapter</td> <td></td> </tr> <tr> <td>Mounting position</td> <td>any</td> <td></td> </tr> </tbody> </table>	Miscellaneous			Name	Value	Unit	Color	black		Legend for ratings	(III / 3 ) ± Overvoltage category III /		Assembly	Interior area, e.g., intermediate floors, suspended ceiling		Insulating material	Polyamide 66 (PA 66)		Flammability class per UL94	V0		Contact material	Copper or copper alloy, surface-treated		Processing temperature	-5°C ... +40°C		Fire load [MJ]	5.607	MJ	Weight [g]	195.43	g	Width	190 mm / 7.48 Inch		Height	30 mm / 1.181 Inch		Depth	145 mm / 5.709 Inch		Type of mounting	Wall screw adapter		Mounting position	any	
Miscellaneous																																																	
Name	Value	Unit																																															
Color	black																																																
Legend for ratings	(III / 3 ) ± Overvoltage category III /																																																
Assembly	Interior area, e.g., intermediate floors, suspended ceiling																																																
Insulating material	Polyamide 66 (PA 66)																																																
Flammability class per UL94	V0																																																
Contact material	Copper or copper alloy, surface-treated																																																
Processing temperature	-5°C ... +40°C																																																
Fire load [MJ]	5.607	MJ																																															
Weight [g]	195.43	g																																															
Width	190 mm / 7.48 Inch																																																
Height	30 mm / 1.181 Inch																																																
Depth	145 mm / 5.709 Inch																																																
Type of mounting	Wall screw adapter																																																
Mounting position	any																																																