


Screwdrivers "Slim" for PlusMinus profile screws

98

- ▶ With the "Slim" version of the screwdriver, sunken screws with PlusMinus profile can also be reached easily
- ▶ The flat blade insulation permits unhindered access while insulation values remain consistent
- > Use with electrical installation components such as circuit breakers
- > Drive bits for PlusMinus screws
- > Ergonomically optimised dual component handle design that prevents rolling for reduced fatigue and optimised transmission of force
- > Chrome vanadium molybdenum steel

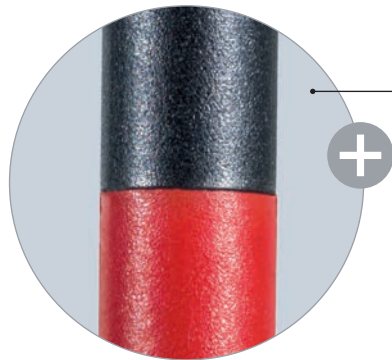

Flexible transition to the insulated shaft



98 24 01 SLS



98 24 02 SLS



98 25 01 SLS



98 25 02 SLS



98 24 01 SLS: Phillips®/slotted



98 24 02 SLS: Phillips®/slotted



98 25 01 SLS: Pozidriv®/slotted



98 25 02 SLS: Pozidriv®/slotted

Article No.	EAN 4003773-	↔ mm	⚠ 1000 V	Description	Blade length mm	Length of non-insulated blade mm	Handle length mm	⚖ g
98 24 01 SLS	081036	187	⚠ 1000 V	burnished, insulated with multi-component grips, VDE-tested	80	15	107	56
98 24 02 SLS	081043	212	⚠ 1000 V		100	18	112	90
98 25 01 SLS	081050	187	⚠ 1000 V		80	15	107	56
98 25 02 SLS	081067	212	⚠ 1000 V		100	18	118	90