







Specifications:
 Material And Finish:
 Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Phosphor Bronze
 Plated:See Ordering Information

Rating:
 Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information
 CS25582-XXX-M36-XX
 A:Ziplock bag + Barcode+Box
 C:In Tray
 E:W/Cap In Tube
 F:W/Cap In Tape&Reel
 O:W/O Peg
 1:W/Peg
 G:Gold Flash
 S:Selective Gold Plated
 T:Tin Plated
 No. of Positions

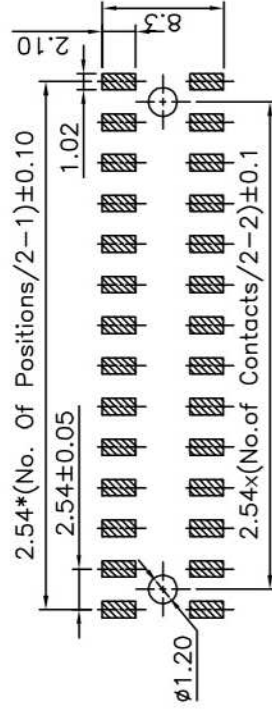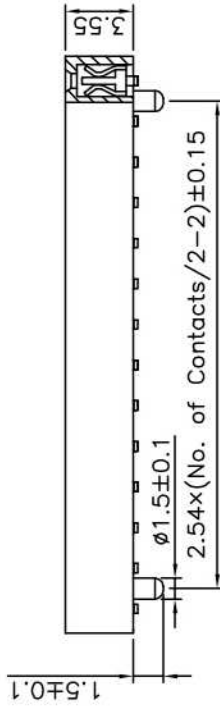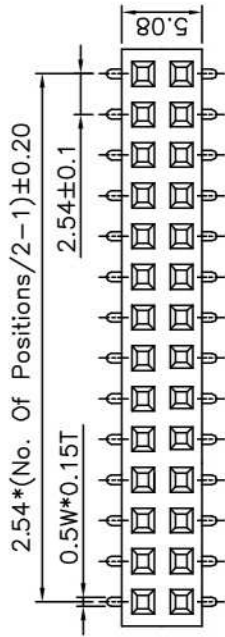

(Tolerance:0.05)
 Recommended PCB Layout

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.30	X: ±5.0°
X.X: ±0.20	X.X: ±3.0°
X.XX: ±0.15	X.XX: ±2.0°
X.XXX: ±0.10	X.XXX: ±1.0°

A5	DR.BY:	Tom Liu	TITLE :	2.54mm Pitch PCB	5	6	7	8
A4	CHKD:	<i>Jack Wu</i>	Socket Header SMT Type					
A3	APPD:	<i>Kane He</i>	PART NO : CS25582-XXX-M36-XX					
A2	DATE	May-23-2011	DWG. NO.: CXRD110523-289					
A1	DR.BY	Tom Liu	DATE: May-23-2011					
REV.	ECN. NO.							

