




209555
BE-R30-G5-K-BS-DIF
Ringlight

- High light intensity thanks to state-of-the-art high power LEDs
- Very compact design
- Long life thanks to intelligent thermal management
- Homogeneous illumination
- Protection class IP 67
- Robust metal housing

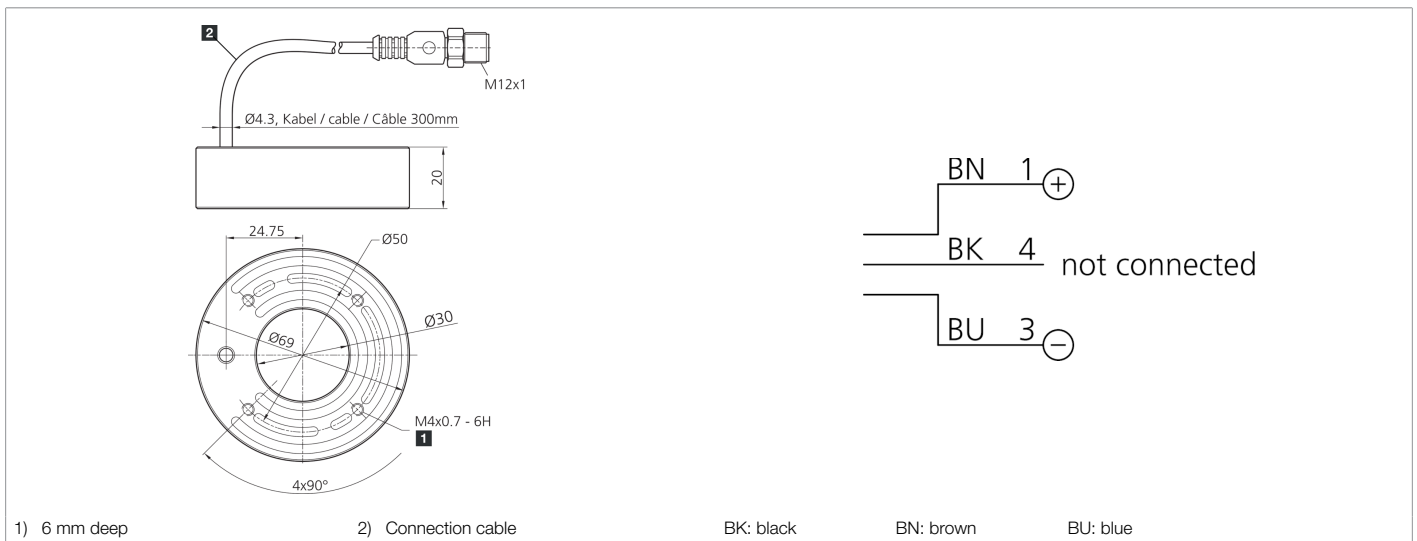

Function										
										 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (Supply Class 2)
Power	4,6 W (24 V DC)
Insulation voltage endurance	500 V
Diameter	Ø 30 / Ø 69 mm (Diameter)
Height	20 mm
Housing material	Aluminum (Black, Anodized)
Material	<ul style="list-style-type: none"> ■ Polyurethane (Cable) ■ PMMA, diffuse (Protection optics)
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Design	Ringlight
Characteristics	State-of-the-art high power LEDs
Light source	LED
Color	White (diffuse)
Wavelength	6.000 K
Deflection angle FWHM	80°
Light intensity	<ul style="list-style-type: none"> ■ 10,9 kLx (100,0 mm) ■ 3,50 kLx (200,0 mm) ■ 1,60 kLx (300,0 mm)
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1,0 mm
Ambient temperature during operation	0 ... +40 °C

**209555****BE-R30-G5-K-BS-DIF****Ringlight****Technical data (typ.)****+20°C, 24 V DC**

Protection type

IP 67

Connection

Pigtail, 0,3 m, M12, 3-pin

Connection cable

VK ...

More information / accessories<https://www.di-soric.com/209555>