


BES 516-371-G-E5-C-S49
Ordering code: BES00ZU

Inductive sensor
D06.5x45 mm

DC, direct current
PNP/Normally open (NO)
Sn = 2 mm
Flush (shielded)

BALLUFF
sensors worldwide

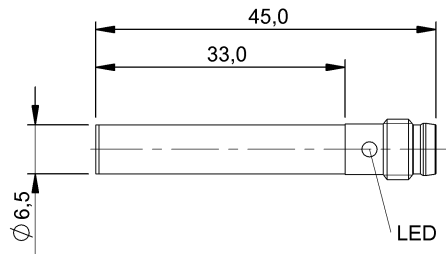

Characteristic data

Eff. switching distance S_r	2,00 mm
Tolerance S_r	± 10 %
Assured operating distance S_a	1,60 mm
Hysteresis H max. (in % of S_r)	15 %
Repeat accur. R max. (% of S_r)	5 %
Ambient temperature	-25...70 °C
Temp. drift max. (% of S_r)	10 %
Switching freq. f max.	1500 Hz
Ready delay t_v max.	20 ms
Utilisation category	DC 13
Function indicator	Yes
Power-on indicator	No
Short-circuit protected	Yes
Degree of protection as per IEC 60529	IP67
Protected against polarity reversal	Yes
Protected against reverse connection	Yes

Electrical data

Operating voltage	
Rated operating voltage U_e DC	24,0 V
Ripple max. (% of U_e)	15 %
Voltage drop static max.	2,5 V
Rated insulation voltage U_i	75 DC V
Effective operating current I_e	200 mA
No-load current I_0 damped	9 mA

No-load current I_0 undamped	3 mA
Off-state current I_r max.	20 μ A
Minimum operating current I_m	0 mA
Rated short circuit current	100 A
Output resistance R_a	33.0k + D
Load capacitance max. (at U_e)	0,5 μ F
Principle of operation	Inductive

Mechanical data

Housing material	Stainless steel
Sensing surface material	PBT
Mounting length	32,3 mm
Connection type	Connector
Connector type	M08x1-S49
Shock rating	Shock, half-sinus, 30 gn, 11ms
Vibration rating	55 Hz, 1 mm ampl., 3x30 min
Degree of contamination	3

Basic data

Basic standard	IEC 60947-5-2
----------------	---------------

Remarks

The sensor is functional again after the overload has been eliminated.
With connector, e.g. BKS-S 49-... total length = switch length +12 mm.
Embeddable: See installation notes for inductive sensors with extended switching distance 825357.



Definitions see main catalog

subject to change

BES 516-371-G-E5-C-S49
Ordering code: BES00ZU

Inductive sensor
D06.5x45 mm

DC, direct current
PNP/Normally open (NO)
Sn = 2 mm
Flush (shielded)

BALLUFF
sensors worldwide

