

BMH0701P17F2A

servo motor BMH - 1.2 Nm - 8000 rpm - keyed shaft - with brake - IP54



Main

| | |
|---------------------------|--|
| Product or component type | Servo motor |
| Device short name | BMH |
| Maximum mechanical speed | 8000 rpm |
| Continuous stall torque | 1.2 N.M for LXM32.U60N4 at 1.5 A, 400 V, three phase 1.2 N.M for LXM32.U60N4 at 1.5 A, 480 V, three phase 1.4 N.M for LXM32.D12N4 at 3 A, 400 V, three phase 1.4 N.m for LXM32.D12N4 at 3 A, 480 V, three phase |
| Peak stall torque | 4.2 N.M for LXM32.U60N4 at 1.5 A, 400 V, three phase 4.2 N.M for LXM32.U60N4 at 1.5 A, 480 V, three phase 4.2 N.M for LXM32.D12N4 at 3 A, 400 V, three phase 4.2 N.m for LXM32.D12N4 at 3 A, 480 V, three phase |
| Nominal output power | 350 W for LXM32.U60N4 at 1.5 A, 400 V, three phase 350 W for LXM32.U60N4 at 1.5 A, 480 V, three phase 700 W for LXM32.D12N4 at 3 A, 400 V, three phase 700 W for LXM32.D12N4 at 3 A, 480 V, three phase |
| Nominal torque | 1.1 N.M for LXM32.U60N4 at 1.5 A, 400 V, three phase 1.1 N.M for LXM32.U60N4 at 1.5 A, 480 V, three phase 1.3 N.M for LXM32.D12N4 at 3 A, 400 V, three phase 1.3 N.m for LXM32.D12N4 at 3 A, 480 V, three phase |
| Nominal speed | 3000 rpm for LXM32.U60N4 at 1.5 A, 400 V, three phase 3000 rpm for LXM32.U60N4 at 1.5 A, 480 V, three phase 5000 rpm for LXM32.D12N4 at 3 A, 400 V, three phase 5000 rpm for LXM32.D12N4 at 3 A, 480 V, three phase |
| Product compatibility | LXM32.U60N4 at 400...480 V three phase LXM32.D12N4 at 400...480 V three phase |
| Shaft end | Keyed |
| IP degree of protection | IP54 standard |
| Speed feedback resolution | 32768 points/turn x 4096 turns |
| Holding brake | With |
| Mounting support | International standard flange |
| Electrical connection | Rotatable right-angled connectors |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

| | |
|---------------------------------------|--|
| Range compatibility | Lexium 32 |
| [Us] rated supply voltage | 480 V |
| Network number of phases | Three phase |
| Continuous stall current | 1.78 A |
| Continuous power | 1.05 W |
| Maximum current Irms | 6 A for LXM32.U60N4 6 A for LXM32.D12N4 |
| Maximum permanent current | 5.97 A |
| Second shaft | Without second shaft end |
| Shaft diameter | 11 mm |
| Shaft length | 23 mm |
| Key width | 18 mm |
| Feedback type | Multiturn SinCos Hiperface |
| Holding torque | 3 N.m holding brake |
| Motor flange size | 70 mm |
| Number of motor stacks | 1 |
| Torque constant | 0.79 N.m/A at 120 °C |
| Back emf constant | 50.72 V/krpm at 120 °C |
| Number of motor poles | 10 |
| Rotor inertia | 0.7 kg.cm ² |
| Stator resistance | 8.3 Ohm at 20 °C |
| Stator inductance | 23.4 mH at 20 °C |
| Stator electrical time constant | 2.8 ms at 20 °C |
| Maximum radial force Fr | 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm |
| Maximum axial force Fa | 0.2 x Fr |
| Brake pull-in power | 7 W |
| Type of cooling | Natural convection |
| Length | 161 mm |
| Centring collar diameter | 60 mm |
| Centring collar depth | 2.5 mm |
| Number of mounting holes | 4 |
| Mounting holes diameter | 5.5 mm |
| Circle diameter of the mounting holes | 82 mm |
| Net weight | 2.6 kg |

Packing Units

| | |
|------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 2.8 kg |
| Package 1 Height | 11.0 cm |
| Package 1 width | 20.0 cm |
| Package 1 Length | 40.0 cm |

Offer Sustainability


| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Servo Motors Dimensions

Example with Straight Connectors

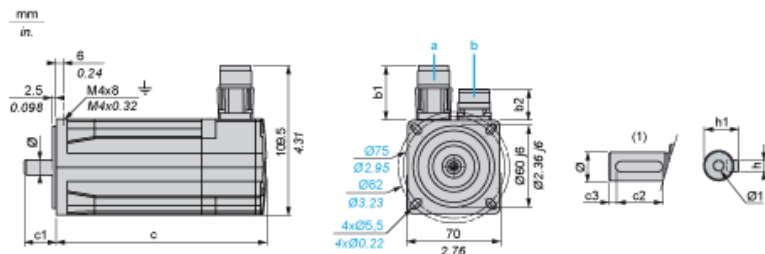

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) Shaft end, keyed slot (optional)

Dimensions in mm

| Straight connectors | | Rotatable angled connectors | | c (without brake) | c (with brake) | c1 | c2 | c3 | h | h1 | Ø | Ø1 for screws |
|---------------------|------|-----------------------------|------|-------------------|----------------|----|----|-----|------|-------------------------------------|-------|---------------|
| b1 | b2 | b1 | b2 | | | | | | | | | |
| 39.5 | 25.5 | 39.5 | 39.5 | 122 | 161 | 23 | 18 | 2.5 | 4 h9 | 12.5 ⁺⁰ _{-0.13} | 11 k6 | M4 x 14 |


Dimensions in in.

| Straight connectors | | Rotatable angled connectors | | c (without brake) | c (with brake) | c1 | c2 | c3 | h | h1 | Ø | Ø1 for screws |
|---------------------|----|-----------------------------|------|-------------------|----------------|------|------|------|---------|---------------------------------------|---------|---------------|
| b1 | b2 | b1 | b2 | | | | | | | | | |
| 1.55 | 1 | 1.55 | 1.55 | 4.80 | 6.33 | 0.90 | 0.70 | 0.09 | 0.16 h9 | 0.49 ⁺⁰ _{-0.0051} | 0.43 k6 | M4 x 0.55 |

400 V 3-Phase Supply Voltage


Torque/Speed Curves

Servo motor with LXM32•U60N4 servo drive

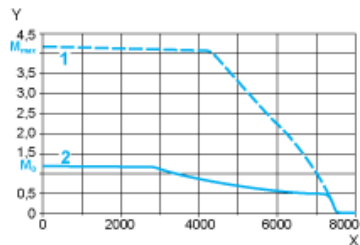

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

Servo motor with LXM32•D12N4 servo drive

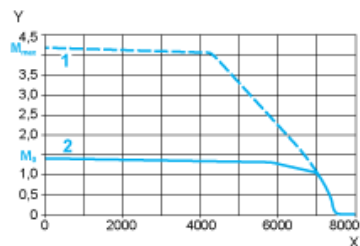


- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

480 V 3-Phase Supply Voltage


Torque/Speed Curves

Servo motor with LXM32•U60N4 servo drive

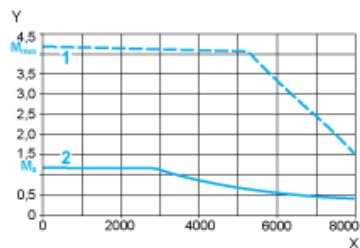

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

Servo motor with LXM32•D12N4 servo drive

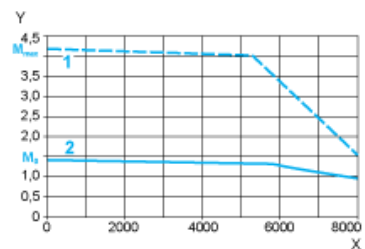

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque