

# Euromas Polyester

Enclosure, polyester



P 327

Order no.: 04327000

\* = Available on request.

## Characteristics

Colour of enclosure group  
squirrel grey

Protection class  
IP 66

Enclosure Material  
UP-GF 25-30%, PU foamed seal; for details see Technical  
Information


## Scope of delivery

Lid and base, lid screws made of V2A, earthing screw

## Dimensions

Dimensions  
230 x 75 x 75.5 mm

## Product drawing

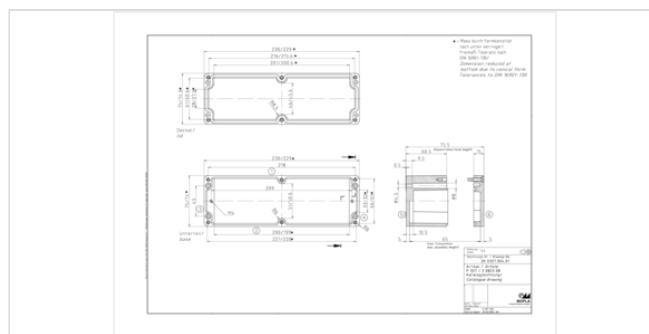

## Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

## Technical documentation / Downloads

### Technical drawings

3D product data in STEP format: Registration necessary  
Product drawing in PDF format: 04327000 P-327.pdf (69.0 KB)  
Product drawing in DXF format: 04327000 P-327.dxf (474.5 KB)  
Drawing for mechanical processing: 04327000 P-327-G.dxf (703.5 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable

20.02.2020

### Product information

Euromas Polyester GB.pdf (308.6 KB)

glands, ...)

## Works Test Certificates

683 WPZ-Euomas-Polyester DE.pdf (173.4 KB)

683 WPZ-Euomas-Polyester EN.pdf (152.0 KB)

## Matching accessories

---



Capstan-headed screws, sealable

21007935 KP

For P 305-322, P 324-329



Allen cheese-head screw for lid

21007940 IS

For P 322, P 327



Wall brackets, screw-on at rear

21004250 WL

For A 114, A 116, A 118, P 305-322, P 324-329



DIN rails DIN EN 60715 TH 15, galvanised steel

24003310 TS 15

For P 322, P 327, P 331



DIN rails DIN EN 60715 G 32, galvanised steel

24003311 TS 32

For P 322, P 327



DIN rails DIN EN 60715 TH 35, galvanised steel

24003312 TS 35

For P 322, P 327



Set of hinges

21007800 SCHK