

# Euromas Polyester

Enclosure, polyester



P 334

Order no.: 04334000

\* = Available on request.

## Characteristics

Colour of enclosure group  
squirrel grey

Protection class  
IP 66

Enclosure Material  
UP-GF 25-30%, PU foamed seal; for details see Technical Information


## Scope of delivery

Lid and base, lid screws made of V2A, earthing screw

## Dimensions

Dimensions  
360 x 160 x 91 mm

## Product drawing

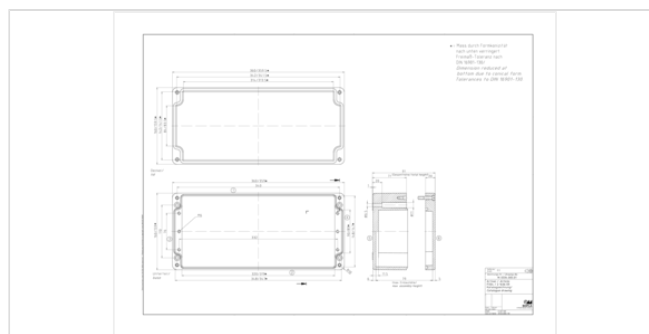

## Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

## Technical documentation / Downloads

### Technical drawings

3D product data in STEP format: Registration necessary  
Product drawing in PDF format: 04334000 P-334.pdf (68.6 KB)  
Product drawing in DXF format: 04334000 P-334.dxf (479.1 KB)  
Drawing for mechanical processing: 04334000 P-334-G.dxf (660.6 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable

20.02.2020

### Product information

Euromas Polyester GB.pdf (308.6 KB)

glands, ...)

## Works Test Certificates

683 WPZ-Euomas-Polyester DE.pdf (173.4 KB)

683 WPZ-Euomas-Polyester EN.pdf (152.0 KB)

## Matching accessories

---



Mounting panels, laminated paper (P 305-329) or galvanised sheet steel (P 330-355)

21001900 M

For A 135, P 334



Capstan-headed screws, sealable

21007975 KP

For A 195, P 330, P 333-336, P 339, P 345



Allen cheese-head screw for lid

21007970 IS

For A 195, P 330, P 333-336, P 339



Earthing bars with fitted terminal clamps

21005000 E

For A 124, A 135, P 334, P 339



Wall brackets, screw-on at rear

21004300 WL

For A 119-198, P 330-355



DIN rails DIN EN 60715 G 32, galvanised steel

21003340 TS 32

For A 124, A 135, P 334, P 339



DIN rails DIN EN 60715 TH 35, galvanised steel

21003350 TS 35

For A 124, A 135, P 334, P 339



Set of hinges

21007800 SCHD

---