

Euromas Polyester

Enclosure, polyester



P 355

Order no.: 04355000

* = Available on request.

Characteristics

Colour of enclosure group
squirrel grey

Protection class
IP 66


Enclosure Material
UP-GF 25-30%, PU foamed seal; for details see Technical Information

Scope of delivery
Lid and base, lid screws made of V2A, earthing screw

Dimensions

Dimensions
400 x 250 x 121 mm

Product drawing

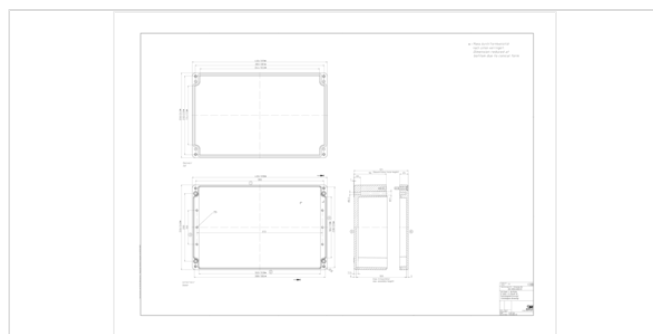

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: Registration necessary
Product drawing in PDF format: 04355000 P-355.pdf (67.5 KB)
Product drawing in DXF format: 04355000 P-355.dxf (466.4 KB)
Drawing for mechanical processing: 04355000 P-355-G.dxf (657.2 KB)
Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable)

Product information

Euromas Polyester GB.pdf (308.6 KB)

glands, ...)

Works Test Certificates

683 WPZ-Euomas-Polyester DE.pdf (173.4 KB)

683 WPZ-Euomas-Polyester EN.pdf (152.0 KB)

Matching accessories



Mounting panels, laminated paper (P 305-329) or galvanised sheet steel (P 330-355)

24000460 M

For P 340, P 355



Capstan-headed screws, sealable

21007995 KP

For A 120-121, A 123, A 126-127, A 131, P 331-332, P 337, P 341-342, P 335



Allen cheese-head screw for lid

21007990 IS

For A 120-121, A 123, A 126-127, A 131, P 331-332, P 337, P 341, P 3412, P 355



Earthing bars with fitted terminal clamps

21005400 E

For A 168, A 170-190, P 340-341, P 3412, P 355



Wall brackets, screw-on at rear

21004300 WL

For A 119-198, P 330-355



DIN rails DIN EN 60715 G 32, galvanised steel

21004100 TS 32

For A 168, A 170-190, P 340-341, P 3412, P 355



DIN rails DIN EN 60715 TH 35, galvanised steel

21004110 TS 35

For A 168, A 170-190, P 340-341, P 3412, P 355



Set of hinges

21007800 SCHK
