

# Alubos

Enclosure profiles, open on one side



ABPU 1300-0150

Order no.: 84137150

\* = Available on request.

## Characteristics

Colour of enclosure group

Black, similar to RAL 9005

Protection class

IP 40

Enclosure Material

Extruded profiles: Al Mg Si 0.5 powder-coated; diecast lid: GB Al Si 12, powder-coated; seal: TPE; for details see Technical Information

## Scope of delivery

Enclosure profile. Please order front panel for ABPU separately.

## Note


C = profile length, special lengths on request.

## Dimensions

Dimensions

138 x 34 x 150 mm

Product drawing

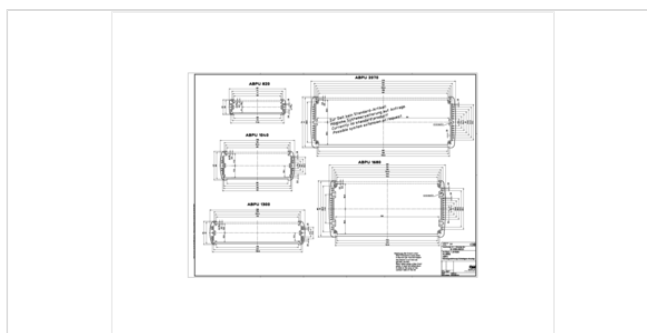

## Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

## Technical documentation / Downloads

---

### Technical drawings

3D product data in STEP format: Registration necessary  
Product drawing in PDF format: 84137150 ABPU-1300-0150.pdf (84.1 KB)  
Product drawing in DXF format: 84137150 ABPU-1300-0150.dxf (3.8 MB)  
Drawing for mechanical processing: 84137150 ABPU-1300-0150-G.dxf (261.1 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

### Product information

Alubos GB.pdf (2.7 MB)

## Matching accessories

---



End cover

84131000 ABD 1300

For AB 1300



Mounting lid with hinged aluminium flap

84134000 ABM 1300 SAL

For AB 1300



EMC seals

84201315 DI 1300-EMV

For AB 1300



Seals, ultramarine

84201314 DI 1300-5002

For AB 1300



Seals, fire red

84201311 DI 1300-3000

For AB 1300



Seals, rape yellow

84201312 DI 1300-1021

For AB 1300



Seals, patina green

84201313 DI 1300-6000

For AB 1300



Seals UL 94 V0

84201319\* DI 1300-V0

For AB 1300



Wall brackets, sheet steel

84005000 AB-WL

For AB 600/800/1000/1300



Front panels, natural-coloured anodised aluminium

84138150 ABPU 1300-0150 FP2

For ABPU 1300-0150, 2 mm



Rubber feet

84006700 AB - GF

Polyurethane, 65-75 Shore

Black