**MICRO SWITCH**
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

# SWITCH-BASIC

CATALOG LISTING
**DT-2RV23-A7**
S

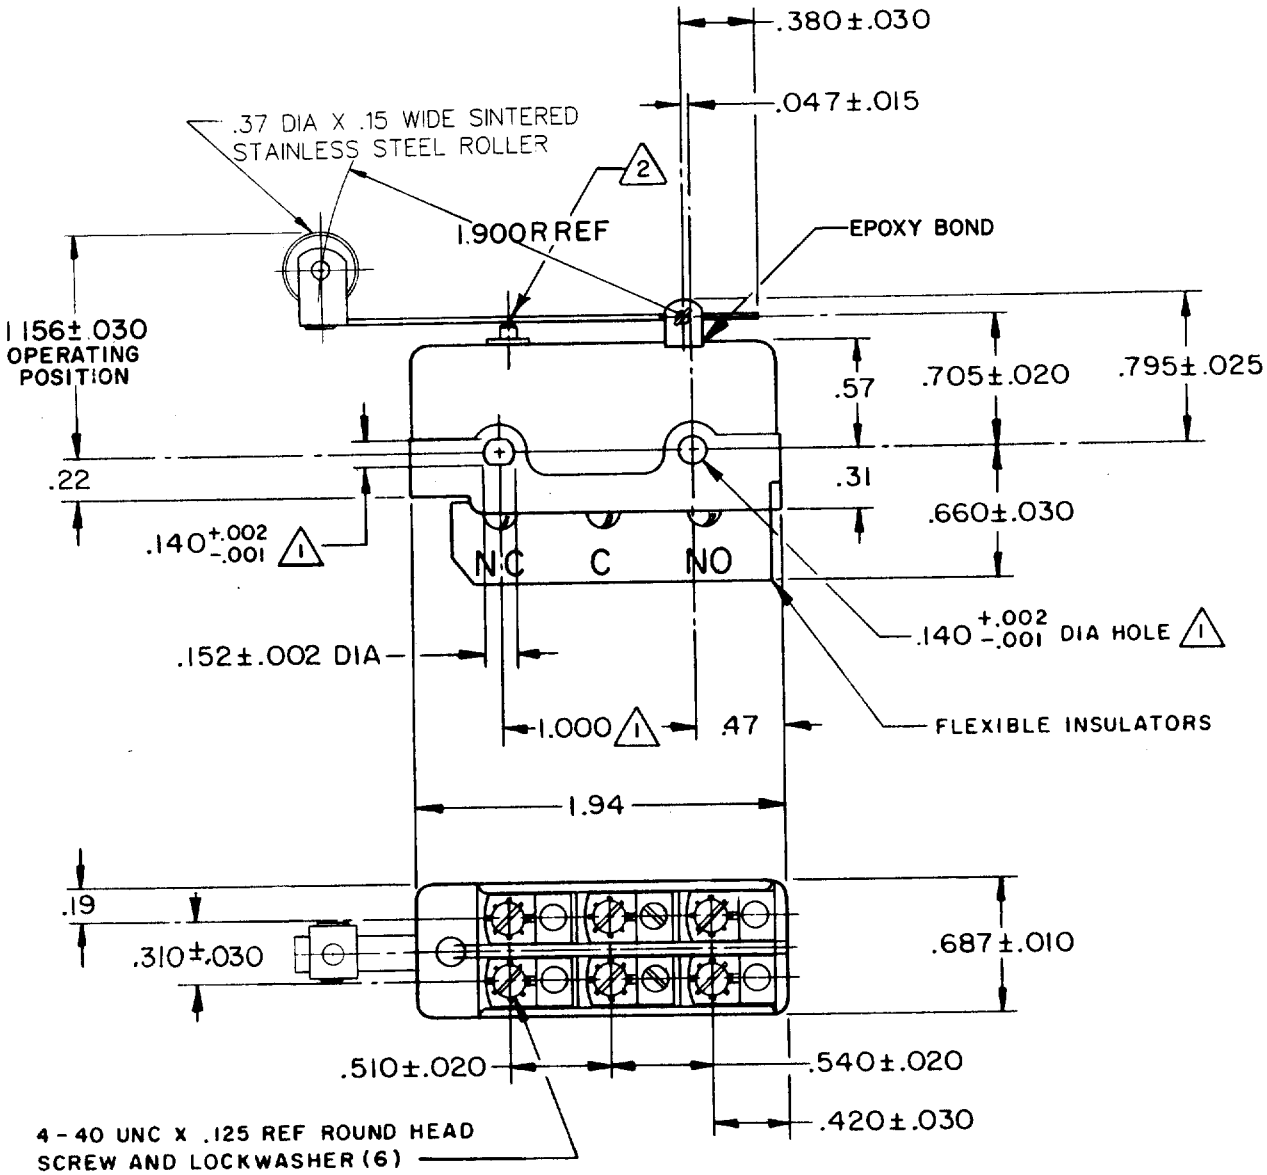


NOTE-
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2. OVERTRAVEL TO BE MEASURED AT CENTER LINE OF PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

## CHARACTERISTICS

| | |
|---|---|
| OPERATING FORCE | 5 1/2 9 1/2 OZ |
| RELEASE FORCE | 3/4 OZ MIN |
| PRETRAVEL | .195 MAX |
| DIFFERENTIAL TRAVEL | .085-.135 |
| OVERTRAVEL (2) | .010 MIN |

## ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

UL LISTED-FILE E12252
CODE L59
10A-125 OR 250 VAC
0.3A-125 VDC; 0.15A-250 VDC

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
**TOLERANCES ARE:**

| | | |
|---|---|---|
| ONE PLACE | (.0) | ±.030 |
| TWO PLACE | (.00) | ±.015 |
| THREE PLACE | (.000) | ±.005 |
| ANGLES | | ± |

WEIGHT .105 LB MAX

DRAWING NUMBER M DT-2RV23-A7
RELEASE NO. X8 X17 X20 X21
REPLACES
CHECK

REVISIONS

| | | |
|---|---|---|
| A | C017725 | L E B 20 JUNE 63 |
| B | C017725 | L E B 28 AUG 63 |
| C | C024941 | M B S 2 DEC 68 |
| D | C026132 | M B S 21 JULY 69 |
| E | C026075 | M B S 26 AUG 69 |
| F | C037528 | C J H 31 AUG 76 |
| G | C038280 | K P K 31 MAR 77 |
| H | C039046 | G A S 16 SEPT 77 |
| J | C046028 | WJM 13 JUN 79 |
| K | C061634 | ISK 17 JUL 87 |
| L | CO-75204-B | S A V 1 FEB 94 |

DRAWN L E B 20JUNE 63 CHECK A.S.D 21 JUN 63

FO-50378