

# EE82 Series

## CO<sub>2</sub> Transmitters and Switches for demanding applications

Measuring instruments in green houses or life stock barns are exposed to a very demanding environment: high humidity levels, pollutants like fertilizers, herbicides and high ammonia concentrations are just a few of the many hazards. The robust, functional housing of the EE82 with integrated special filter has been designed for such applications.

The air diffuses through the filter into the instrument enclosure. Then the air diffuses further through a second membrane filter integrated in the CO<sub>2</sub> measuring cell.

The CO<sub>2</sub> measurement is based on the non-dispersive infrared (NDIR) technology. The patented auto-calibration procedure compensates for aging of the infrared source and guarantees high reliability, long term stability and eliminates the need of periodical recalibration in the field.



Measuring ranges of 0...2000/5000/10000ppm correspond to an analogue interface of 0 - 5/10V or 4 - 20mA. Selectively a switching output with adjustable switching point and hysteresis is available.

The very practical snap-in mounting flange and connector for the supply voltage and outputs allow quick and easy installation of the EE82 without ever opening the housing.

### Typical Applications

- green houses
- fruit and vegetable storage
- life stock barns

### Features

- easy installation
- compact housing
- auto-calibration
- measuring range 0...10000ppm
- analogue or switching output

### Technical Data

#### Measuring Values

|                                      |   |                                     |
|--------------------------------------|---|-------------------------------------|
| Measuring principle                  | Non-Dispersive Infrared Technology (NDIR) |                                     |
| Sensing element                      | E+E Dual Source Infrared System           |                                     |
| Measuring range                      | 0...2000 / 5000 / 10000ppm                |                                     |
| Accuracy at 25°C (77°F) and 1013mbar | 0...2000ppm:                              | < ± (50ppm +2% of measuring value)  |
|                                      | 0...5000ppm:                              | < ± (50ppm +3% of measuring value)  |
|                                      | 0...10000ppm:                             | < ± (100ppm +5% of measuring value) |
| Response time $\tau_{95}$            | < 195s                                    |                                     |
| Temperature dependence               | typ. 2ppm CO <sub>2</sub> /°C             |                                     |
| Long term stability                  | typ. 20ppm / year                         |                                     |
| Sample rate                          | approx. 15s                               |                                     |

#### Output

##### Analogue Output

|                            |                 |                             |
|----------------------------|-----------------|-----------------------------|
| 0...2000 / 5000 / 10000ppm | 0 - 5 / 0 - 10V | -1mA < I <sub>L</sub> < 1mA |
|                            | 4 - 20mA        | R <sub>L</sub> < 500 Ohm    |

##### Switching Output

|                        |                 |              |
|------------------------|-----------------|--------------|
| Max. switching voltage | 50V AC / 60V DC |              |
| Max. switching load    | 0.7A at 50V AC  | 1A at 24V DC |
| Min. switching load    | 1mA at 5V DC    |              |
| Contact material       | Ag+Au clad      |              |



#### General

|                                    |  |                               |
|------------------------------------|--|-------------------------------|
| Supply voltage                     | 24V AC ±20%                                      | 15 - 35V DC                   |
| Current consumption                | typ. 10mA + output current<br>max. 0.5A for 0.3s |                               |
| Warm up time <sup>1)</sup>         | < 5 min  |                               |
| Housing / protection class         | PC / IP54  |                               |
| Electrical connection              | M12 plug   |                               |
| Electromagnetic compatibility      | EN61326-1  | FCC Part 15                   |
|                                    | EN61326-2-3                                      | ICES-003 ClassB               |
| Working temperature and conditions | -20...60°C (-4...140°F)                          | 0...100% RH                   |
| Storage temperature and conditions | -20...60°C (-4...140°F)                          | 0...95% RH (not condensating) |

1) warm up time for performance according specification




## Dimensions (mm)

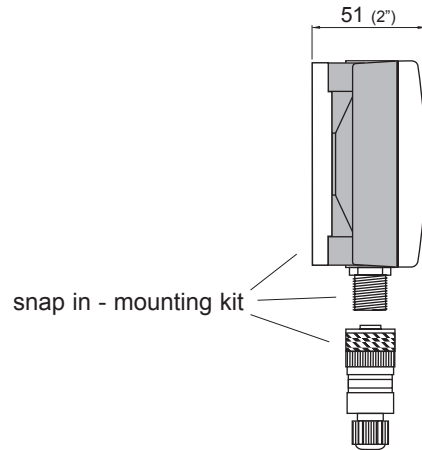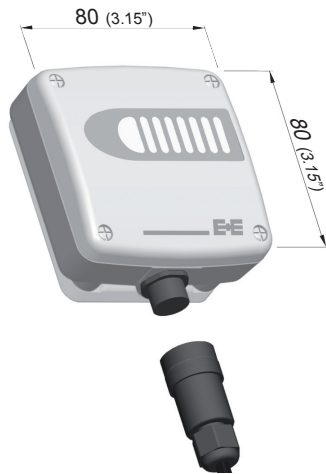

## Connection Diagram

### Analogue Output



EE82-xC2/3/6

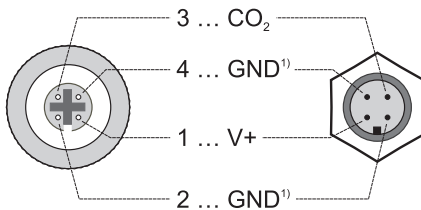

1) GND internally connected

### Switching Output

EE82-xCS

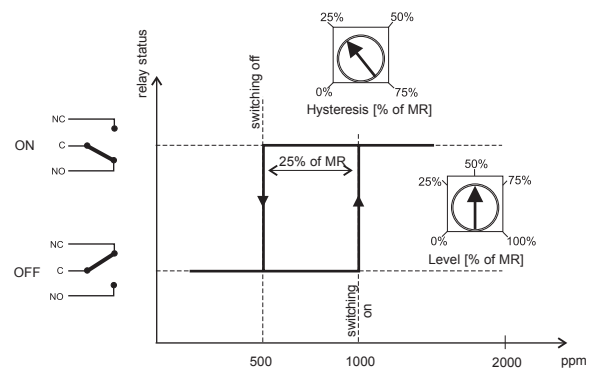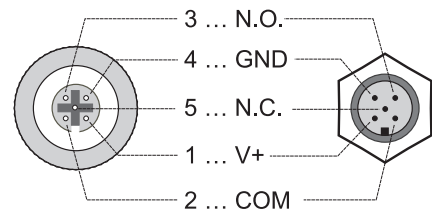

## Ordering Guide

| MEASURING RANGE   | MODEL               | OUTPUT               |
|-------------------|---------------------|----------------------|
| 0...2000ppm (2)   | CO <sub>2</sub> (C) | 0 - 5V (2)           |
| 0...5000ppm (5)   |                     | 0 - 10V (3)          |
| 0...10000ppm (10) |                     | 4 - 20mA (6)         |
|                   |                     | switching output (S) |
| <b>EE82-</b>      |                     |                      |

## Order Example

**EE82-5C3**  
 Measuring range: 0...5000ppm  
 Model: CO<sub>2</sub>  
 Output: 0 - 10V