


REVISIONS

REV	DESCRIPTION	DATE	ECO	DR	APPD
A	UPDATED PER ECO 1577075	5-16-11	1577075	LRK	JPN

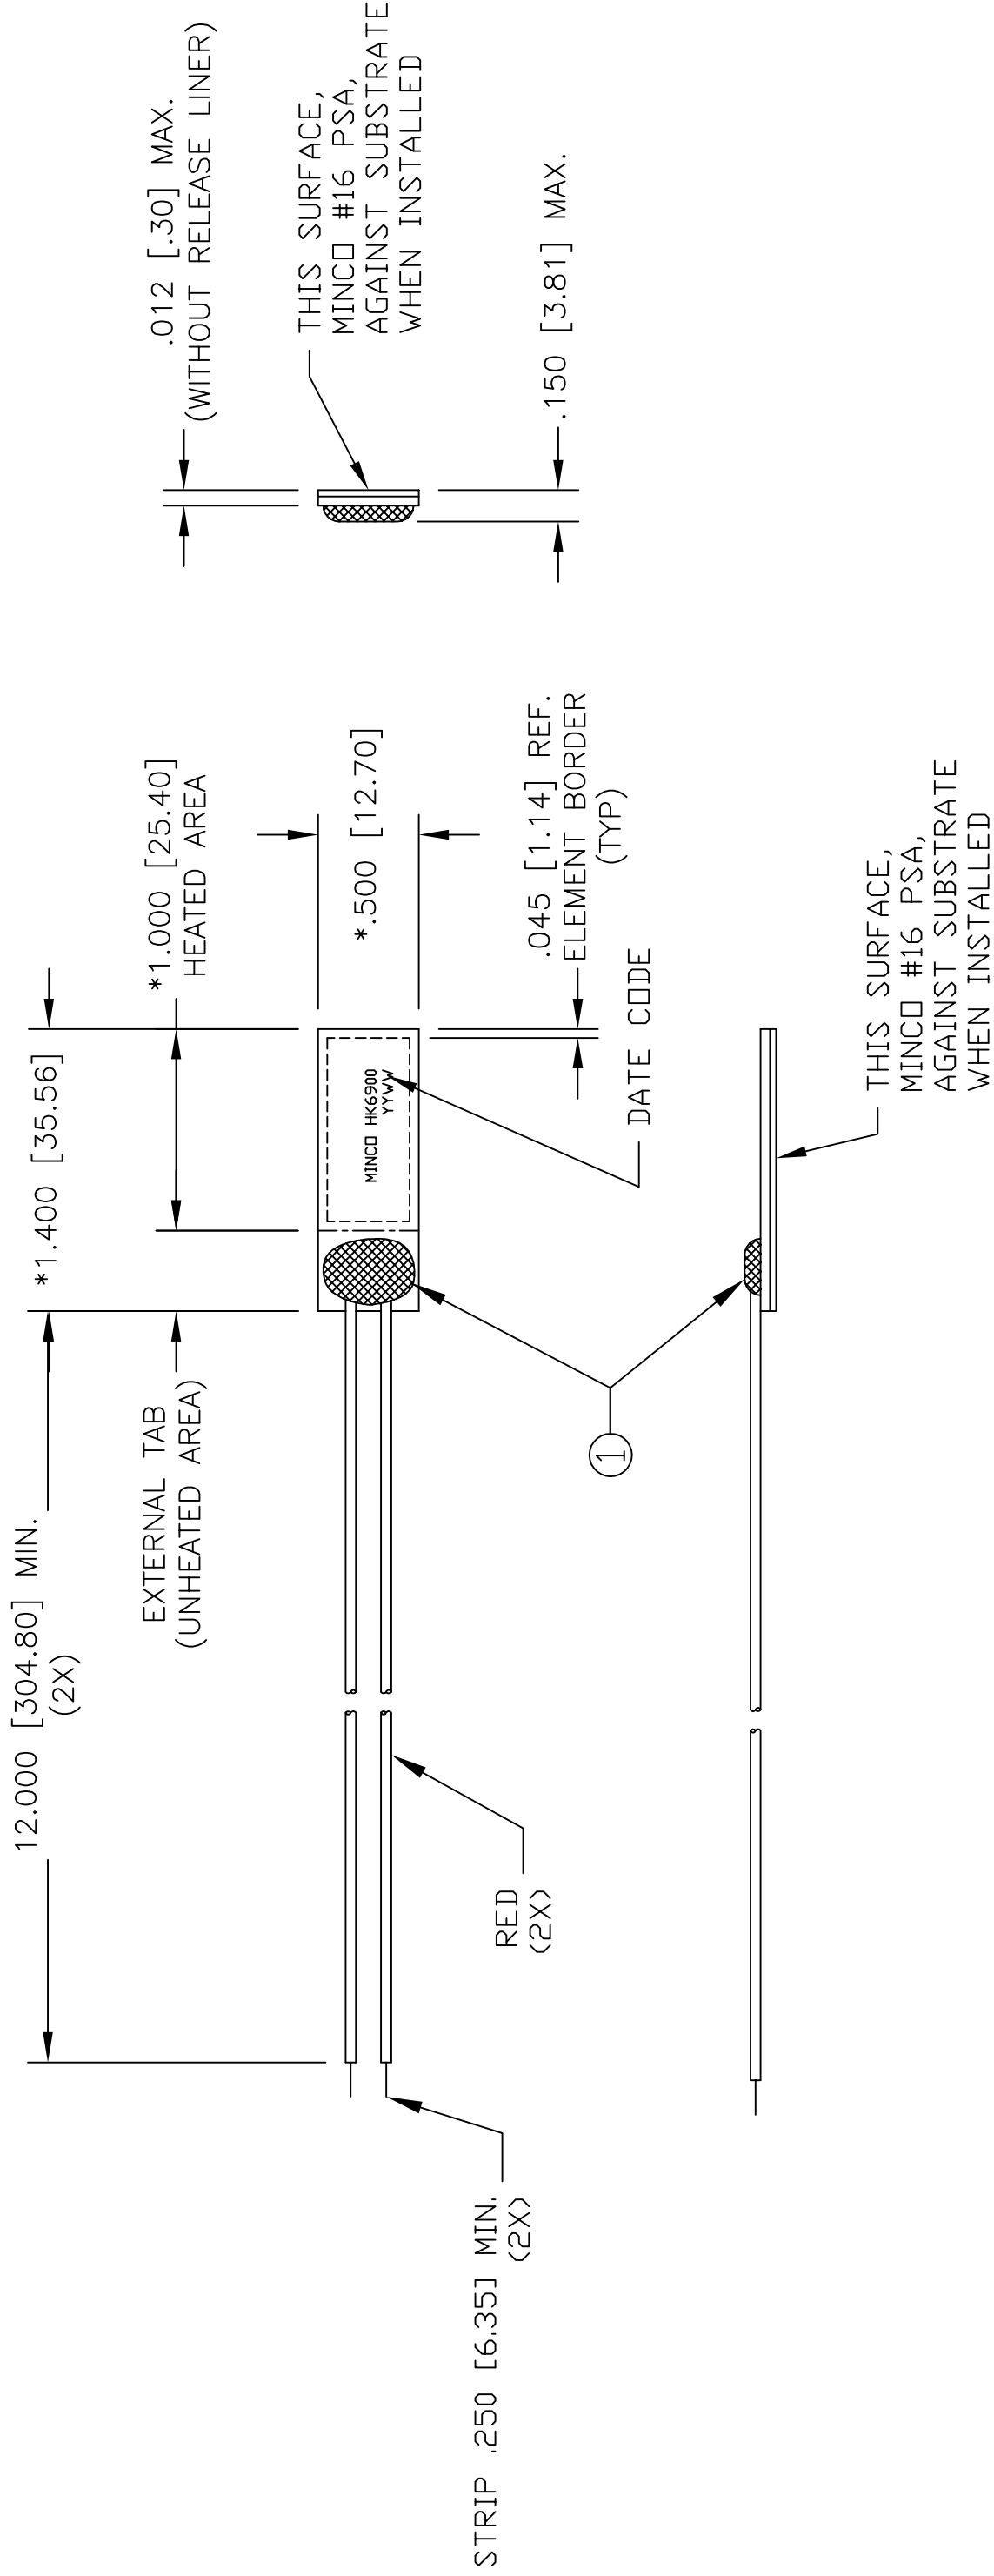

9. PART IS ROHS COMPLIANT.
8. DIMENSIONS PRECEDED BY AN * ARE CONTROLLED BY ENGINEERING DESIGN AND TOOLING.
7. HEATER IS SUPPLIED WITH MINCO #16 PRESSURE-SENSITIVE ADHESIVE AND RELEASE LINER WHICH COVER THE ENTIRE SUBSTRATE SIDE. INSTALL HEATER PER SPI 00-0603, A COPY OF WHICH IS INCLUDED WITH SHIPMENT.
6. INSULATION: POLYIMIDE.
5. LEADWIRE: A.W.G. #26, STRANDED, TFE INSULATED PER NEMA HP3.
4. DIELECTRIC STRENGTH: 500 VOLTS RMS AT 60 HZ FOR 1 MINUTE, ELEMENT TO OUTER SURFACES.
3. TEMPERATURE LIMIT: 100°C MAXIMUM AT ZERO POWER.
2. RESISTANCE: 210.13 OHMS (231.14/189.12).
1. ELEMENT: NON-INDUCTIVE PATTERN.

ITEM	REQD	PART/STOCK NO	URETHANE, BLUE	MATERIAL DESCRIPTION
①	AR	701-9001		THERMOFOIL HEATER MODEL HK6900
TITLE:				
DR	LRK	2368	7-22-11	INITIALS
CHK	DD	1996	4-01-11	DATE
APP				
ENGR	JPN	3182	4-05-11	INITIALS
QA				
PRD				
NEXT ASST				
USED ON				
				CATEGORY
				INIT. JOB
				SCALE
				NONE
				DWG SIZE
				B
				STOCK NO
				09359
				SHEET
				1 OF 1

MINCO

www.minco.com

COMPANY CONFIDENTIAL
PROPRIETARY INFORMATION OF MINCO PRODUCTS, INC.
DO NOT DUPLICATE

REV
HK6900
A