


REVISIONS					
REV	DESCRIPTION	DATE	ECO	DR	APPD
A	UPDATED PER ECO 1577075	5-16-11	1577075	LRK	JPN

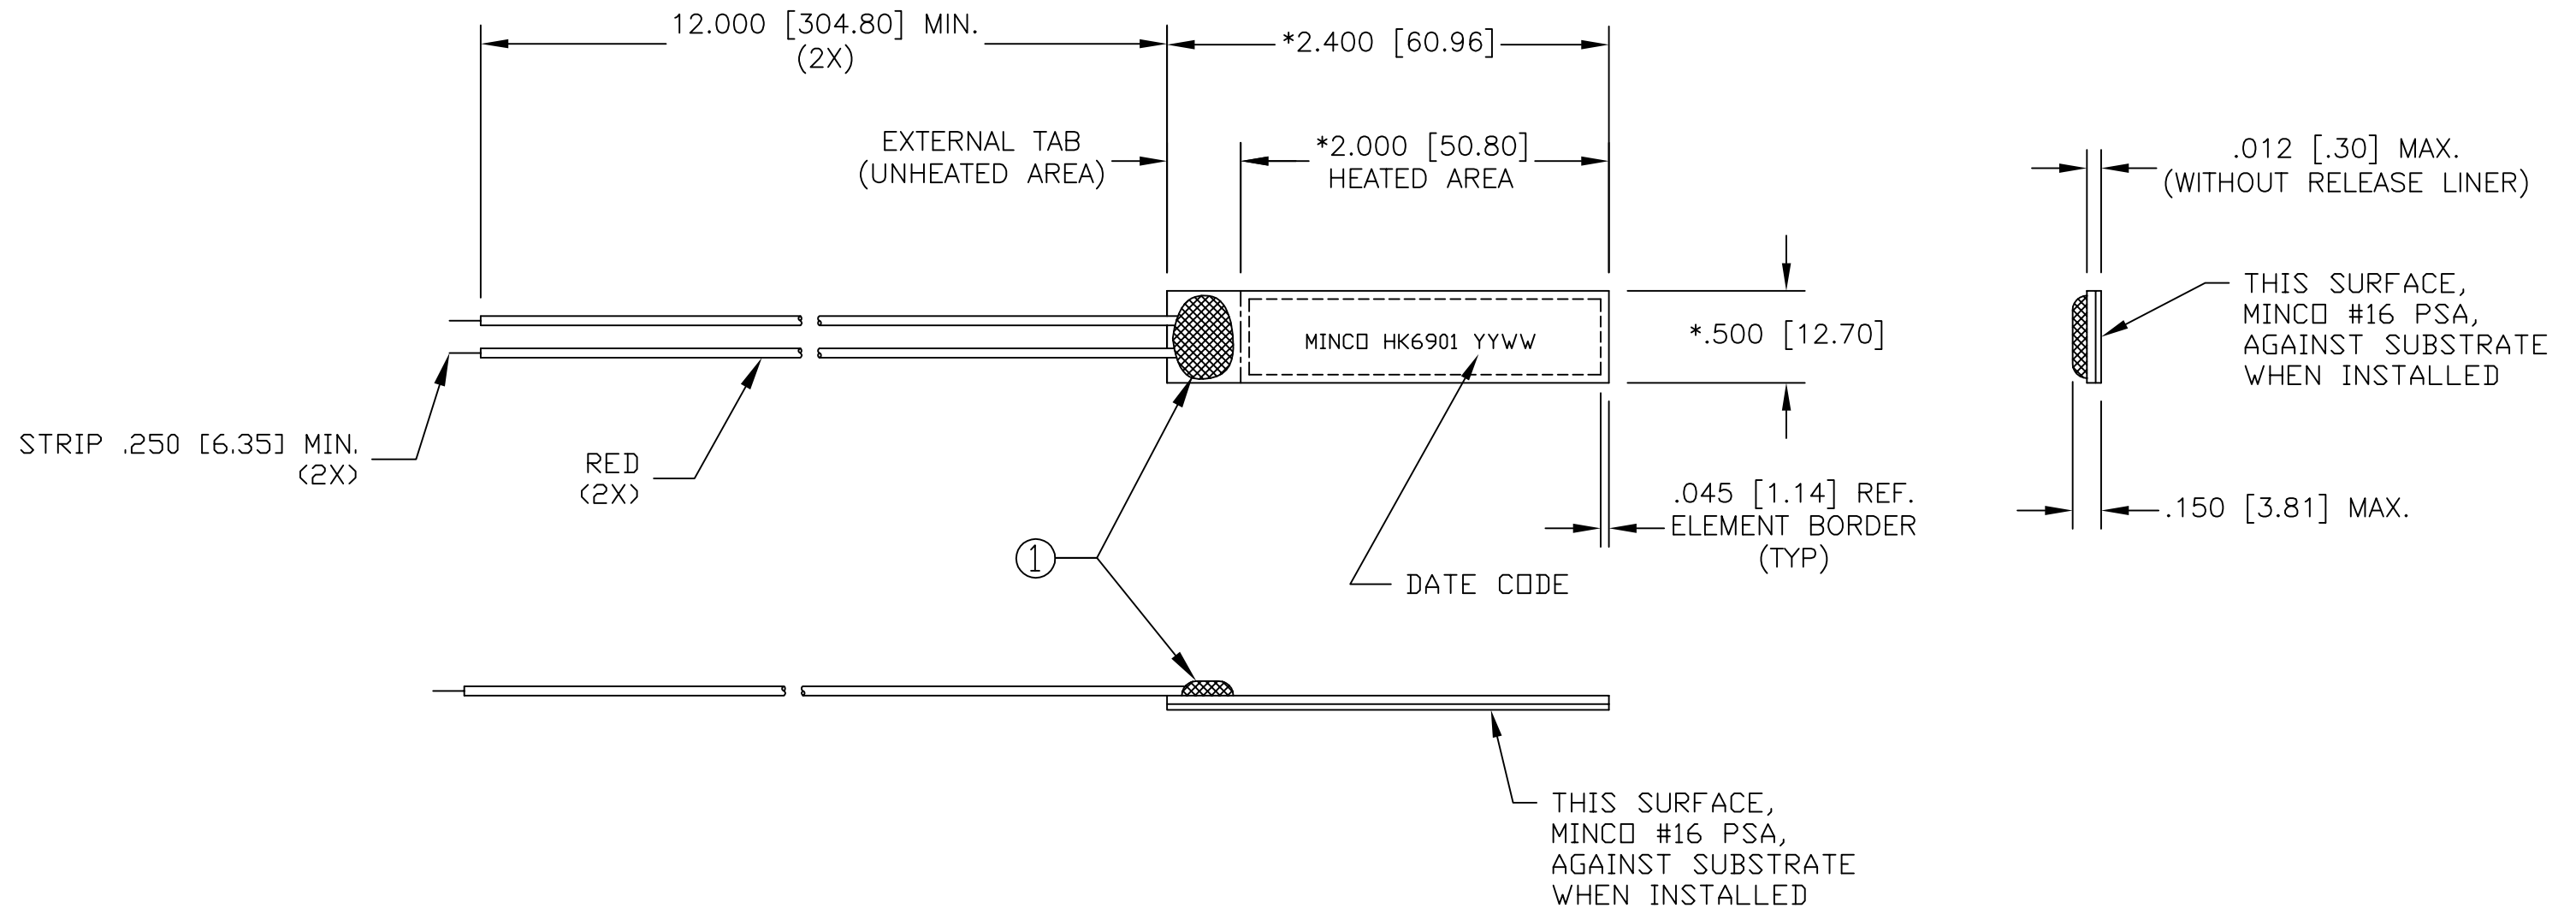

9. PART IS RoHS COMPLIANT.
8. DIMENSIONS PRECEDED BY AN \* ARE CONTROLLED BY ENGINEERING DESIGN AND TOOLING.
7. HEATER IS SUPPLIED WITH MINCO #16 PRESSURE-SENSITIVE ADHESIVE AND RELEASE LINER WHICH COVER THE ENTIRE SUBSTRATE SIDE. INSTALL HEATER PER SPI 00-0603, A COPY OF WHICH IS INCLUDED WITH SHIPMENT.
6. INSULATION: POLYIMIDE.
5. LEADWIRE: A.W.G. #26, STRANDED, TFE INSULATED PER NEMA HP3.
4. DIELECTRIC STRENGTH: 500 VOLTS RMS AT 60 Hz FOR 1 MINUTE, ELEMENT TO OUTER SURFACES.
3. TEMPERATURE LIMIT: 100°C MAXIMUM AT ZERO POWER.
2. RESISTANCE: 100.11 OHMS (110.12/90.11).
1. ELEMENT: NON-INDUCTIVE PATTERN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS AND TOLERANCES IN INCHES DIMENSIONS IN [ ] ARE IN MILLIMETERS		INITIALS	DATE	ITEM	REQD	PART/STOCK NO	MATERIAL DESCRIPTION				
ONE PLACE (.0)	} ±.030 [±0.76]	DR	LRK 2368	7-22-11		701-9001	URETHANE, BLUE				
TWO PLACE (.00)		CHK	DD 1996	4-01-11							
THREE PLACE (.000)		APP									
ANGLES:	ENGR	JPN 3182	4-05-11								
MATERIAL:		QA					<b>MINCO</b> www.minco.com COMPANY CONFIDENTIAL PROPRIETARY INFORMATION OF MINCO PRODUCTS, INC. DO NOT DUPLICATE				
FINISH:		PRD						HK6901 REV A			
		NEXT ASSY									
		USED ON		INIT. JOB		STOCK NO	SCALE NONE	DWG SIZE B		CAGE IDENT. 09359	SHEET 1 OF 1