REVISIONS					
REV	DESCRIPTION	DATE	ECO	DR	APPD
A	CHANGED MARKING TO TWO LINES	8–17–13	1889595	LRK	MTW

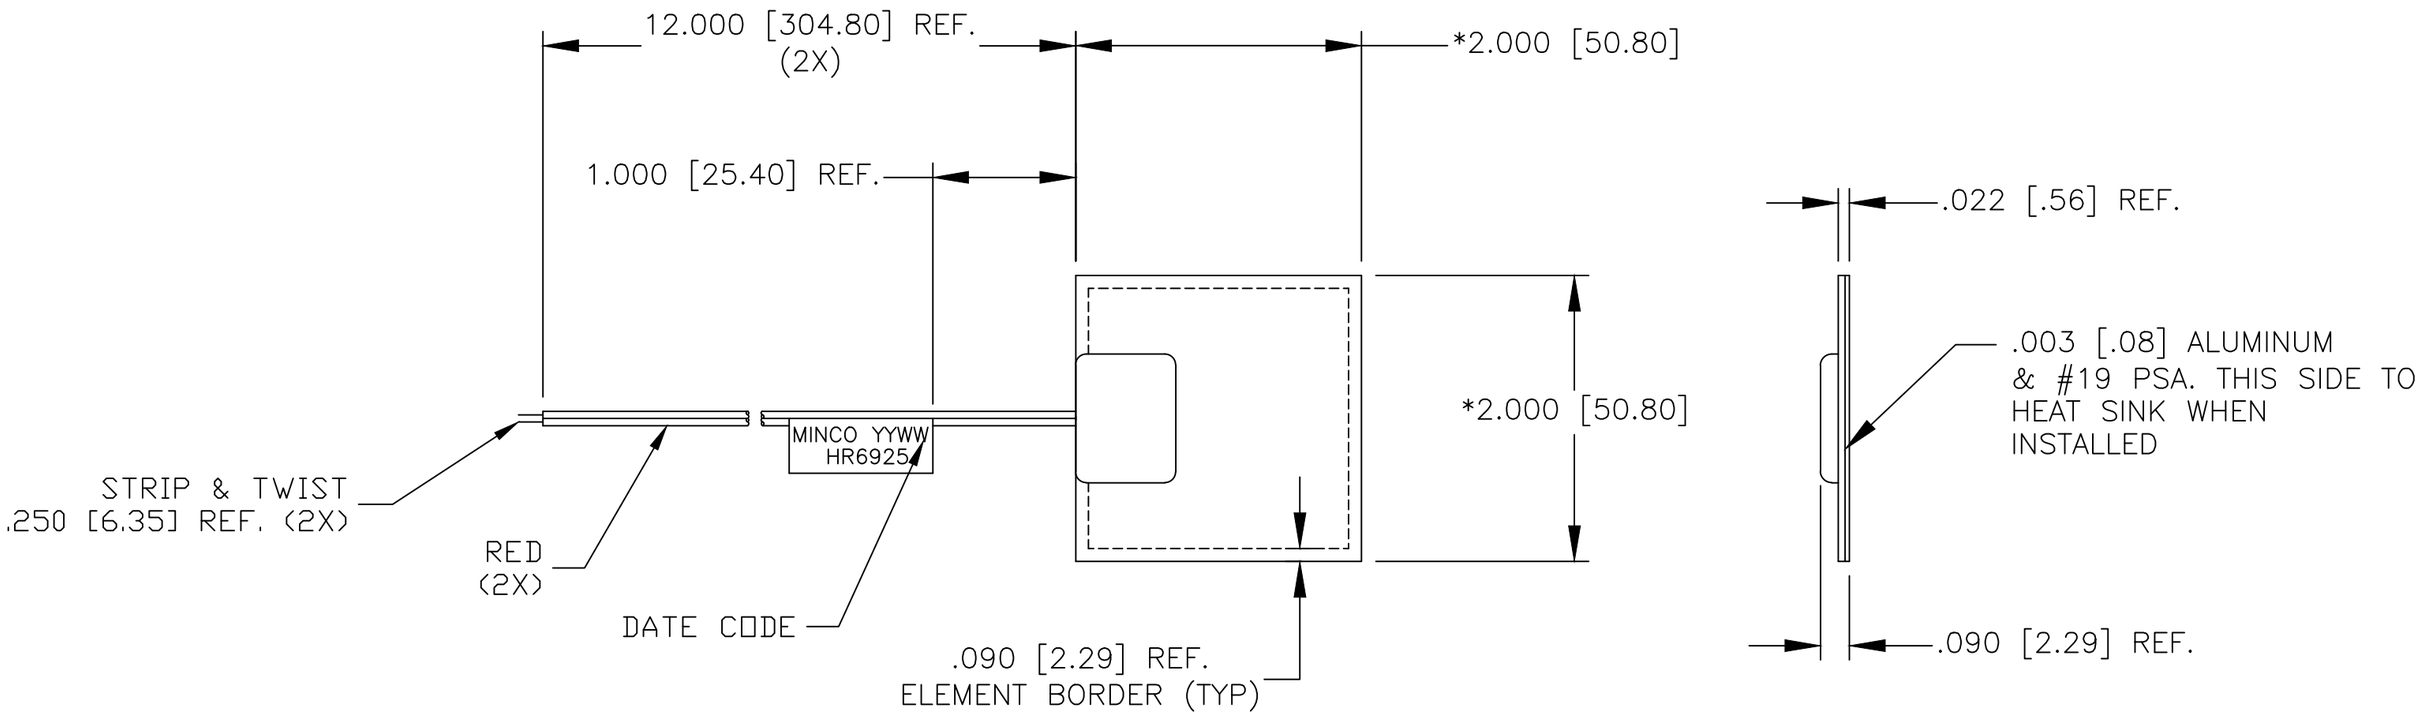

8. PART IS RoHS COMPLIANT.
7. DIMENSIONS PRECEDED BY AN * ARE CONTROLLED BY ENGINEERING DESIGN AND TOOLING.
6. LEADWIRE: A.W.G. #24, STRANDED, TFE INSULATED PER MIL-W-16878/4 AND UL1716.
5. INSULATION: SILICONE RUBBER.
4. DIELECTRIC STRENGTH: 1,200 VOLTS RMS AT 60 Hz FOR 1 SECOND MINIMUM, ELEMENT TO HEAT SINK SURFACES. 1 mA. MAXIMUM LEAKAGE CURRENT.
3. TEMPERATURE LIMIT: 150°C MAXIMUM AT ZERO POWER.
2. RESISTANCE: 22.83 (25.11/20.55).
1. ELEMENT: NON-INDUCTIVE PATTERN.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS AND TOLERANCES IN INCHES
DIMENSIONS IN [ ] ARE IN MILLIMETERS
ONE PLACE (.0)
TWO PLACE (.00) } ±.030 [±0,76]
THREE PLACE (.000)
ANGLES:

MATERIAL:

FINISH:

INITIALS	DATE
DR LRK 2368	6–20–11
CHK	
APP BGB 5234	8–23–11
ENGR M WINGERT	8–29–11
QA	
PRD MK 1333	8–30–11
NEXT ASSY	CATEGORY
USED ON	INIT. JOB

ITEM	REQD	PART/STOCK NO	MATERIAL DESCRIPTION

TITLE:

THERMOFOIL(TM) HEATER
SPECIFICATION DRAWING

STOCK NO | SCALE NONE | DWG SIZE B

MINCO
www.minco.com

COMPANY CONFIDENTIAL
PROPRIETARY INFORMATION OF MINCO PRODUCTS, INC.
DO NOT DUPLICATE

HR6925 REV A

CAGE IDENT. 09359 | SHEET 1 OF 1