


Flame-Retardant Heat Shrinkable Tube Set

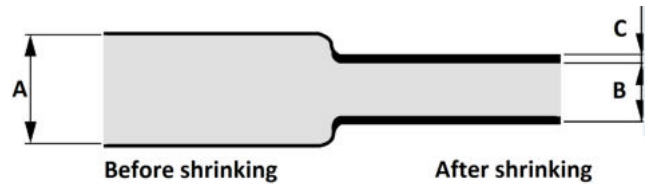

FEATURES:

Flexible, flame retardant heat shrink tubing assortment with excellent physical and mechanical properties

Contains a total of 595 pieces in 5 different lengths

Diameter ranges from 3.5 to 26 mm

SPECIFICATION:

Shrink ratio	2:1
Dielectric strength	15 kV/mm
Material	Polyolefin
Shrinkage temperature range	+75...+125 °C
Temperature range	-55...+125 °C

TECHNICAL CHARACTERISTICS:

		Testing method	Typical Performance	
Physical	Tensile strength	GB/T1040	≥10.4 MPa	
	Elongation	GB/T1040	≥200%	
	Tensile strength after aging/MPa	UL224; 158 °C×168hr	≥7.3	
	Elongation after aging	UL224; 158 °C×168hr	≥100%	
	Heat Resistance	UL224; 250 °C×4hr	No viscosity No cracking	
	Cold Bend	UL224; -30 °C×1hr	No cracking	
Electrical	Dielectric Withstand	300V	UL224	No Breakdown for 1500V
		600V	UL224	No Breakdown for 2500V
	Dielectric Strength	GB/T1408	≥15 kv/mm	
	Volume resistance Ω•cm	GB/T1410	≥1×10 ¹⁴	
Chemical	Anti Corrosion	UL224	PASS	
	Copper stability	UL224	PASS	
	Flammability	UL224	VW-1	

SET INCLUDES:

	A	B	C	Length
100 x Black Tubes	3.5 mm	1.50 mm	0.45 mm	50 mm
50 x Clear Tubes	5.0 mm	2.00 mm	0.56 mm	50 mm
50 x Green/Yellow Tubes	5.0 mm	2.00 mm	0.56 mm	50 mm
50 x Yellow Tubes	5.0 mm	2.00 mm	0.56 mm	50 mm
50 x Red Tubes	5.0 mm	2.00 mm	0.56 mm	50 mm
50 x Blue Tubes	5.0 mm	2.00 mm	0.56 mm	50 mm
50 x Black Tubes	5.0 mm	2.00 mm	0.56 mm	50 mm
30 x Black Tubes	6.5 mm	3.00 mm	0.56 mm	50 mm
30 x White Tubes	6.5 mm	3.00 mm	0.56 mm	50 mm
30 x Red Tubes	6.5 mm	3.00 mm	0.56 mm	50 mm
10 x Black Tubes	9.5 mm	4.50 mm	0.56 mm	85 mm
10 x Clear Tubes	9.5 mm	4.50 mm	0.56 mm	85 mm
10 x Clear Tubes	12.5 mm	6.00 mm	0.56 mm	85 mm
20 x Black Tubes	12.5 mm	6.00 mm	0.56 mm	85 mm
5 x Blue Tubes	19.0 mm	9.00 mm	0.70 mm	85 mm
5 x Red Tubes	19.0 mm	9.00 mm	0.70 mm	85 mm
5 x Yellow Tubes	19.0 mm	9.00 mm	0.70 mm	85 mm
5 x Clear Tubes	19.0 mm	9.00 mm	0.70 mm	85 mm
10 x Black Tubes	12.5 mm	6.00 mm	0.56 mm	100 mm
10 x Black Tubes	19.0 mm	9.00 mm	0.70 mm	100 mm
5 x Black Tubes	19.0 mm	9.00 mm	0.70 mm	250 mm
5 x Black Tubes	26.0 mm	12.5 mm	0.90 mm	200 mm
5 x Black Tubes	26.0 mm	12.5 mm	0.90 mm	250 mm