

UVA TSLC N3535 9 SCOB


IHO-XO09-Sxxx-SC201.

Product Overview

At the heart of each UV SCOB are 9 compact, high quality and reliable TSLC N3535U 1-chip UV LED, with primary 125 degree lens, featuring high radiometric power density and design flexibility. The 9 UV SCOB range is suited to demanding industrial applications and features a vertical chip structure on a patented metal alloy substrate, offering advances in optical output and high thermal conductivity. The SCOB family are based on the industry standard Zhaga footprints, enabling the device to utilise all the existing industry standard connectors, reflectors and heat sinks. SCOBs are compact, powerful LED light sources built on aluminium substrates for optimal thermal management.

Applications


- Aquarium lighting
- Horticultural lighting
- Spore control
- Plant stressing



Technical Features

- N3535 9 SCOBs contains 9 1-chip UV LED with integral 125 degree silicone lens
- Mounting holes using M3 screws allows easy installation
- Secondary Lens can be fitted – check suitable options in Lens and Reflector section
- Suitable Heatsinks available – check options in Heatsink section
- Matching Power Supply available – check options in Power Supply section
- Suitable Thermal Interface Material available – check options in Thermal Interface Material section
- Size (L x W x H): 24 x 24 x 3.05mm
- SCOBs can be linked together to produce longer chains
- Current range to 300-2100 mA

*This datasheet should be read in conjunction with the relevant TSLC data for the LED used

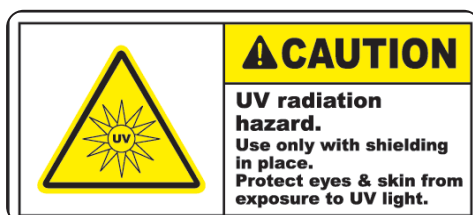

These products generate UV radiation which can cause skin damage and conjunctivitis to humans and animals within a short time. The skin and eyes must be fully protected against exposure. You should be aware that UV radiation does not eliminate harmful non-degradable substances such as heavy metals or pesticides. Assume IEC62471 Risk Group 3

Important Information and Precautions

- During operation, the LED emits ultraviolet (UV) light which is harmful to skin and eyes. UV radiation can cause sunburn, conjunctivitis and cancer.
- Precautions MUST be taken to avoid looking directly at the UV light such as the use of UV light protective glasses.
- These devices emit high intensity UV/NUV light. Necessary precautions must be taken during operation. Do not look directly into the light or look through the optical system when in operation. Protective eyewear should be worn at all times during operation.
- Lens discolouration may occur with prolonged exposure to UV/NUV light. Lens material will need to be tested for UV/NUV light compatibility and durability.
- SCOBs will overheat in operation if not attached to a suitable Heatsink. Overheating can cause failure or irreparable damage.
- Do not operate SCOBs with a Power Supply with unlimited current.
- Connection to constant voltage Power Supplies that are not current limited may cause the SCOBs to consume current above the specified maximum and cause failure or irreparable damage.
- SCOBs, when operated, can reach high temperatures thus there is risk of injury if they are touched.
- DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY.
- DO NOT TOUCH or PUSH on the LED as this can cause irreparable damage.

Product Options

IHS PART NUMBER	Peak Wavelength *		Typical Wattage at 1050mA§	Forward Voltage *	Minimum Radiometric Power (mW) at 1050mA *	Radiance Angle	Relevant TSLC LED data
	min λ _p	max λ _p					
IHO-XO09-S380-SC201.	380nm	390nm	9.45W	27-36V	2880mW	125° (+/- 62.5°)	N3535U
IHO-XO09-S410-SC201.	410nm	420nm	9.45W	27-36V	3600mW	125° (+/- 62.5°)	N3535U

*Radiometric power is measured with an accuracy of ±10%.

*The forward voltage is measured with an accuracy of ±0.2V

*The peak/dominant wavelength is measured with an accuracy of ±1 nm

Micromoles

IHS Part Number	PAR (400-700nm)	Photon Flux (240-790nm)	DIN5031-10 (400-725nm)	McCree (400-700nm)	McCree (300-800nm)
IHO-XO09-S380-SC201.	0.50 umol/s	9.28 umol/s	0.33YPF umol/s	0.35YPF umol/s	5.07YPF umol/s
IHO-XO09-S410-SC201.	11.91 umol/s	12.52 umol/s	10.11YPF umol/s	8.70YPF umol/s	9.05YPF umol/s




Minimum and Maximum Ratings


IHS PART NUMBER	Operating Temperature at Tc-Point [°C] *	Storage Temperature [°C] *	Forward Current per chip [mA] *	Reverse Voltage [Vdc] *
IHO-XO09-S380-SC201.	-40 ... 60 (°C)	-40 ... 105 (°C)	700mA max	Not designed to be driven in reverse
IHO-XO09-S410-SC201.	-40 ... 60 (°C)	-40 ... 105 (°C)	700mA max	Not designed to be driven in reverse

* Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module. Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED module. The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.

Radiation of single LED

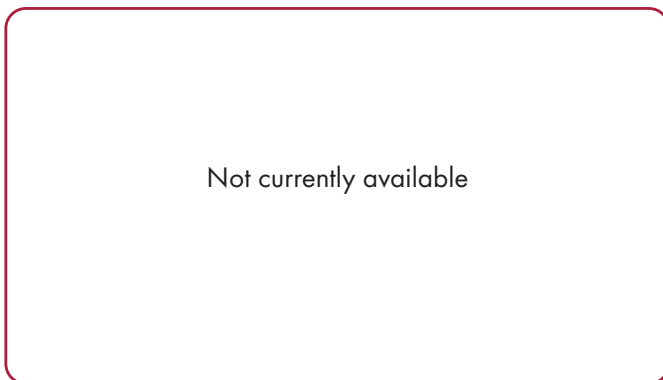

Technical Drawing (mm)

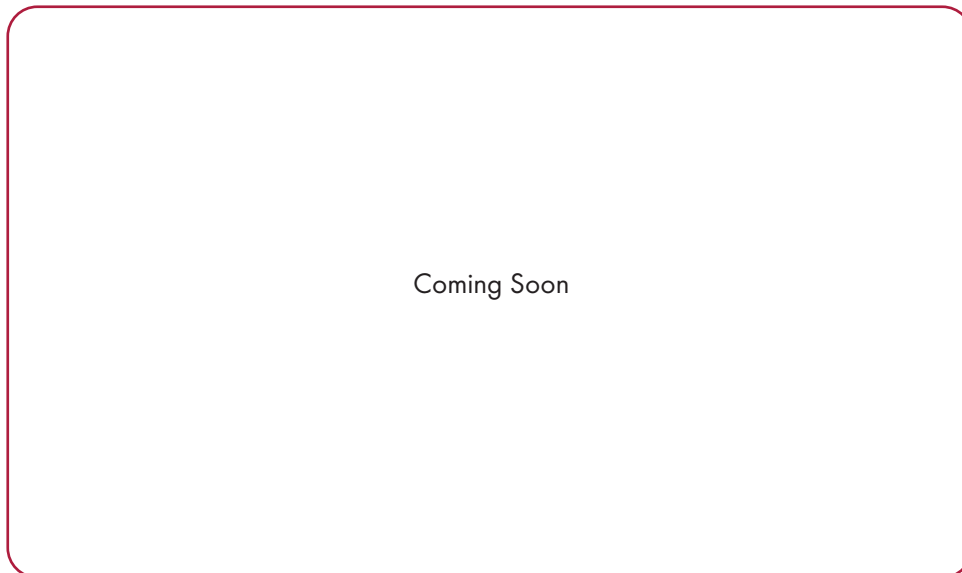

3D drawing files are available on request from IHS. Please call or email



Sockets and Connectors

The IHS SCOBs are designed to meet the Zhaga standards, and as such will work with any relevant Zhaga compliant connectors or sockets.

Below is a selection of products that will work with the IHO-Xx09-Sxxx-SC201. family of products;

Connector: 462 Typ L3
 Manufacturer: Bender Wirth



Connector: 2213407-2 + OPTIC CLIP Z50 TYPE1: 2213194-1
 Manufacturer: TE



Connector: 47.319.2170
 Manufacturer: BJB



N3535 9 SCOB Lens and Reflector Options

LEDiL precision-engineered Lenses and Reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL Lenses and Reflectors are released alongside the latest product releases from our LED suppliers. You select the best LED for the application; choose LEDiL and you're selecting the best optical solution as well.



Part Number	Beam	Size	Height	Family	FWHM	Material	Colour	Fastening
C16899_ALISE-110-S	Spot	110mm ø	65mm	ALISE	15	Aluminium	Metal	Glue/ socket
C16900_ALISE-110-M	Medium	110mm ø	65mm	ALISE	24	Aluminium	Metal	Glue/ socket
C16901_ALISE-110-W	Wide	110mm ø	65mm	ALISE	36	Aluminium	Metal	Glue/ socket
F14627_STELLA-FRESNEL	Medium	85mm ø	23mm	STELLA	25	Silicone	Clear	Glue/ socket
F15263_STELLA-HB-WWW	Wide	85mm ø	11.3mm	STELLA	100	Silicone	Clear	Glue/ socket
F15074_ZORYA-SC	Wide	56mm ø	26.7mm	ZORYA	340	Silicone	Clear	Glue/ socket


N3535 9 SCOB Heatsink Options

IHS has a series of Aluminium Alloy Heatsinks to be used with our standard range of PowerStars, PowerClusters and PowerLinear Engines. Some Heatsinks are supplied as kits with fixing screws and Thermal Interface Material (TIM). ILS is continually expanding its Heatsink range and we are equally happy to manufacture custom Heatsinks upon your request.

IHS Product		ILA-HSINK-RADI-55X20MM-BLK	ILA-HSINK-RADI-70X20MM-BLK	ILA-HSINK-RADI-70X70MM-BLK	ILA-HSINK-RADI-100X65MM-BLK	ILA-HSINK-RADI-110X80MM-BLK	ILA-HSINK-RADI-120X150MM-BLK
N3535 9 SCOB	350mA	Yellow	Green	Green	Green	Green	Green
	700mA	Yellow	Green	Green	Green	Green	Green
	1050mA	Red	Yellow	Green	Green	Green	Green

Key

- Operates under the recommended IHS junction temperature
- Operates under the recommended LED maximum junction temperature
- Not suitable for use
- Heatsink not designed for use with this product

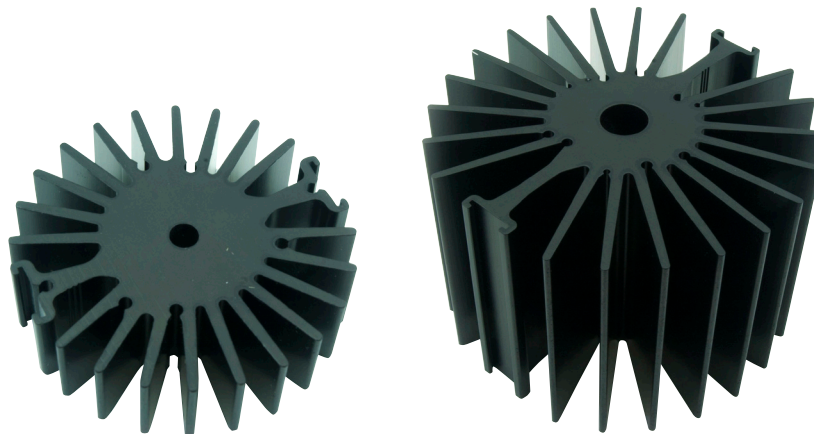

N3535 9 SCOB Power Supply Options

IHS has a comprehensive range of standard Power Supplies. Additional Power Supplies are frequently being introduced so please call us or check our website for the latest offering.

IHS Driver Part No.	Rating(W)	Constant Current Output	Forward Voltage	
IZC035-008F-5065C-SA	8W	350mA	3-6V	
IZC035-017F-0067A-SA	17W	350mA	6-48V	
IZC035-018T-9500A-SX	18W	350mA	15-52V	
IZC050-018T-9500A-SX	18W	500mA	9-36V	
IZC070-018T-9500A-SX	18W	700mA	6-26V	
IZC095-040M-9067C-SAL	40W	950mA	25.2-42V	
OTi-DALI-15/220-240/1A0-LT2	15W	150-1050mA	7.5-54V	
OTi-DALI-25/220-240/700-LT2	25W	180-700mA	12-54V	
OTi-DALI-10/220-240/700-NFC	10W	150-700mA	2.5-24V	
OTi-DALI-35/220-240/700-LT2-L-G2	35W	200-700mA	15-54V	
OT-20/170-240/800-1DIMLT2-G1-CE	20W	200-1050mA	10-38V	
OT-40/170-240/1A0-1DIMLT2-G1-CE	40W	200-1050mA	15-56V	

N3535 9 SCOB Thermal Interface Material Options

IHS has produced a range of high-performance, cost effective Thermal Interface Materials to match perfectly their standard products. Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the Heatsink.

Product	Non Adhesive	Single Sided Adhesive	Double Sided Adhesive
N3535 9 SCOB	ILA-TIM-LES19-0A	ILA-TIM-LES19-1A	ILA-TIM-LES19-2A

Other sizes are available, including customised parts.

Assembly Information

- The mounting of the SCOB has to be on a metal Heatsink.
- In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.

Safety Information

- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- The mounting of the module is carried out by attaching it to the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.
- To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.
- Observe correct polarity! Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!
- Pay attention to standard ESD precautions when installing the SCOB.
- The SCOB, as manufactured, has no conformal coating and therefore offers no inherent protection against corrosion.
- Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the Tc junction temperature to within stated ranges.
- To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.
- The evaluation of eye safety occurs according to the standard IEC 62471:2006 ("photobiological safety of lamps and lamp systems"). Within the risk grouping system of this CIE standard, the LED specified in this data sheet falls into the class "moderate risk" (exposure time 0.25s). Under real circumstances (for exposure time, eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. As is also true when viewing other bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment and even accidents, depending on the situation.



www.i-hled.co.uk

For further information please contact IhS

The values contained in this datasheet can change due to technical innovations. Any such changes will be made without separate notification.

