

# UVA N3535 12 LED VIOLET Strip


IHS-XO12-Sxxx-0280-SC201-W2.

## Product Overview

At the heart of each UV VIOLET strip are 12 compact, high quality and reliable TSLC N3535U 1-chip UV LEDs, with a primary 125 degree lens, featuring high radiometric power density and design flexibility. The VIOLET strip has been specifically designed to work with the VIOLET linear lens from LEDiL. The UV VIOLET range is suited to demanding industrial applications and features a vertical chip structure on a patented metal alloy substrate, offering advances in optical output and high thermal conductivity. VIOLET strips are compact, powerful LED light sources built on aluminium substrates for optimal thermal management. Available with 200mm wires as standard.

## Applications


- Aquarium lighting
- Horticultural lighting
- Spore control
- Plant stressing

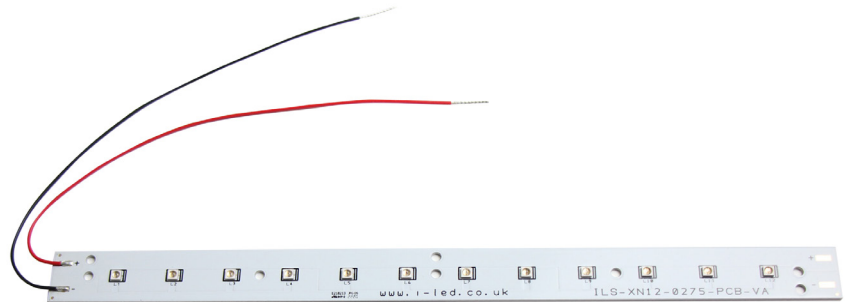

## Technical Features

- N3535 12 VIOLET strip contains 1-chip UV LED with integral 125 degree silicone lens
- Mounting holes using M3 screws allows easy installation
- Available with 200mm connecting wires
- Secondary Lens can be fitted – check suitable options in Lens and Reflector section
- Suitable Heatsinks available – check options in Heatsink section
- Matching Power Supply available – check options in Power Supply section
- Suitable Thermal Interface Material available – check options in Thermal Interface Material section
- Size (L x W x H): 275 x 20 x 3.65mm
- VIOLET strips can be linked together to produce longer chains
- Current range to 300-2100mA

\*This datasheet should be read in conjunction with the relevant TSLC data for the LED used

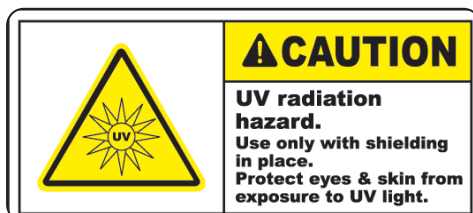

These products generate UV radiation which can cause skin damage and conjunctivitis to humans and animals within a short time. The skin and eyes must be fully protected against exposure. You should be aware that UV radiation does not eliminate harmful non-degradable substances such as heavy metals or pesticides. Assume IEC62471 Risk Group 3

## Important Information and Precautions

- During operation, the LED emits ultraviolet (UV) light which is harmful to skin and eyes. UV radiation can cause sunburn, conjunctivitis and cancer.
- Precautions MUST be taken to avoid looking directly at the UV light such as the use of UV light protective glasses.
- These devices emit high intensity UV/NUV light. Necessary precautions must be taken during operation. Do not look directly into the light or look through the optical system when in operation. Protective eyewear should be worn at all times during operation.
- Lens discolouration may occur with prolonged exposure to UV/NUV light. Lens material will need to be tested for UV/NUV light compatibility and durability.
- VIOLET strips will overheat in operation if not attached to a suitable Heatsink. Overheating can cause failure or irreparable damage.
- Do not operate VIOLET strips with a Power Supply with unlimited current.
- Connection to constant voltage Power Supplies that are not current limited may cause the VIOLET strip to consume current above the specified maximum and cause failure or irreparable damage.
- VIOLET strips, when operated, can reach high temperatures thus there is risk of injury if they are touched.
- DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY.
- DO NOT TOUCH or PUSH on the LED as this can cause irreparable damage

## Product Options

IHS PART NUMBER	Peak Wavelength *		Typical Wattage at 1050mA§	Forward Voltage *	Minimum Radiometric Power (mW) at 1050mA *	Radiance Angle	Relevant TSLC LED data
	min λp	max λp					
IHS-XO12-S380-SC201-WIR200.	380nm	390nm	12.6W	12.0 - 16.8V	3840mW	125° (+/- 62.5°)	N3535U
IHS-XO12-S410-SC201-WIR200.	410nm	420nm	12.6W	12.0 - 16.8V	4800mW	125° (+/- 62.5°)	N3535U

\*Radiometric power is measured with an accuracy of ±10%.

\*The forward voltage is measured with an accuracy of ±0.2V

\*The peak/dominant wavelength is measured with an accuracy of ±1 nm

## Micromoles

IHS Part Number	PAR (400-700nm)	Photon Flux (240-790nm)	DIN5031-10 (400-725nm)	McCree (400-700nm)	McCree (300-800nm)
IHS-XO12-S380-SC201-WIR200.	0.66 umol/s	12.38 umol/s	0.44YPF umol/s	0.46YPF umol/s	6.77YPF umol/s
IHS-XO12-S410-SC201-WIR200.	15.88 umol/s	16.69 umol/s	13.48YPF umol/s	11.60YPF umol/s	12.07YPF umol/s


## Minimum and Maximum Ratings

IHS PART NUMBER	Operating Temperature at Tc-Point [°C] *	Storage Temperature [°C] *	Forward Current per chip [mA] *	Reverse Voltage [Vdc] *
IHS-XO12-S380-SC201-WIR200.	-40 ... 60 (°C)	-40 ... 105 (°C)	2100mA max	Not designed to be driven in reverse
IHS-XO12-S410-SC201-WIR200.	-40 ... 60 (°C)	-40 ... 105 (°C)	2100mA max	Not designed to be driven in reverse


\* Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module. Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED module. The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.



## Radiation of single LED

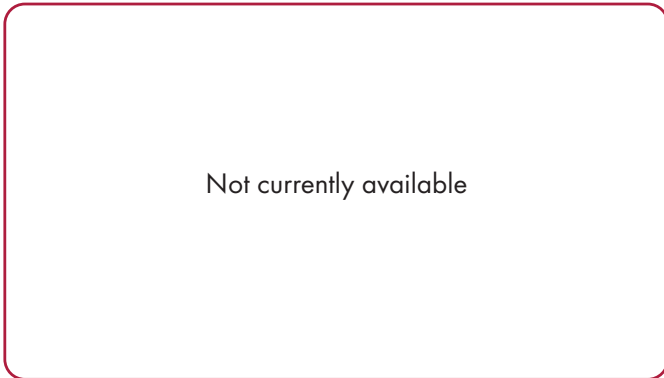

## Technical Drawing (mm)

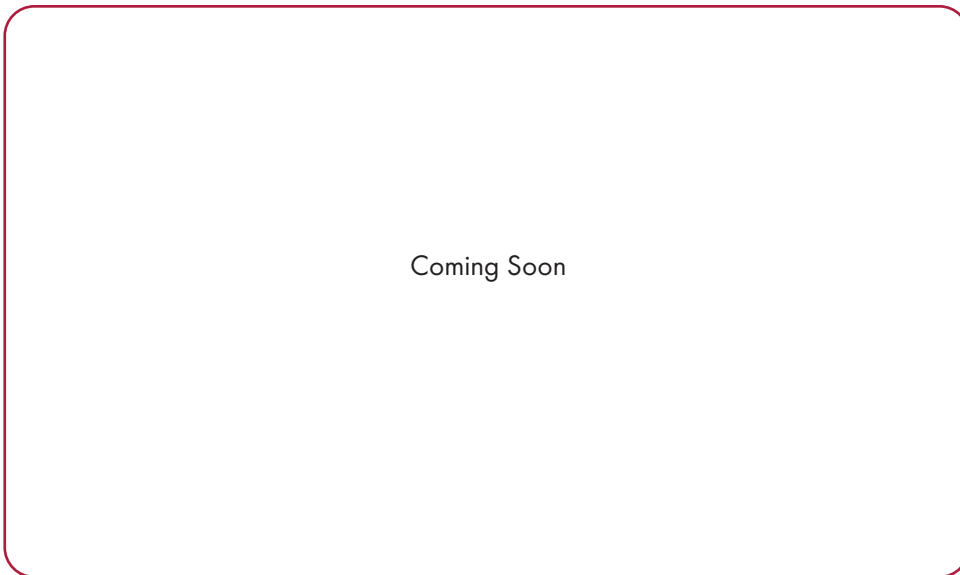

**3D drawing files are available on request from IHS. Please call or email**

## N3535 12 VIOLET Strip Lens and Reflector Options

LEDiL precision-engineered Lenses and Reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL Lenses and Reflectors are released alongside the latest product releases from our LED suppliers. You select the best LED for the application; choose LEDiL and you're selecting the best optical solution as well.



Part Number	Beam	Size	Height	Family	FWHM	Material	Colour	Fastening
FN17294_VIOLET-12X1-S	Spot	295x42mm	8.8mm	VIOLET	20	Silicone	Clear	Screw



## N3535 12 VIOLET Strip Heatsink Options

IHS has a series of Aluminium Alloy Heatsinks to be used with our standard range of PowerStars, PowerClusters and PowerLinear Engines. Some Heatsinks are supplied as kits with fixing screws and Thermal Interface Material (TIM). IHS is continually expanding its Heatsink range and we are equally happy to manufacture custom Heatsinks upon your request.






IHS Product		No Heatsink, in free air	ILA-HSINK-300x58MM
N3535 12 VIOLET Strip	350mA		
	700mA		
	1050mA		

### Key








- Operates under the recommended IHS junction temperature
- Operates under the recommended LED maximum junction temperature
- Not suitable for use
- Heatsink not designed for use with this product

## N3535 12 VIOLET Strip Power Supply Options

IHS has a comprehensive range of standard Power Supplies. Additional Power Supplies are frequently being introduced so please call us or check our website for the latest offering.

IHS Driver Part No.	Rating	Current	Output Voltage of LED Driver	
IZC035-008F-5065C-SA	8W	350mA	3-6V	
IZC035-017F-0067A-SA	17W	350mA	6-48V	
IZC035-018T-9500A-SX	18W	350mA	15-52V	
IZC050-018T-9500A-SX	18W	500mA	9-36V	
IZC070-018T-9500A-SX	18W	700mA	6-26V	



IHS Driver Part No.	Rating	Current	Output Voltage of LED Driver	
IZC095-040M-9067C-SAL	40W	950mA	25.2-42V	
OTi-DALI-15/220-240/1A0-LT2	15W	150-1050mA	7.5-54V	
OTi-DALI-25/220-240/700-LT2	25W	180-700mA	12-54V	
OTi-DALI-10/220-240/700-NFC	10W	150-700mA	2.5-24V	
OTi-DALI-35/220-240/700-LT2-L-G2	35W	200-700mA	15-54V	
OT-20/170-240/800-1DIMLT2-G1-CE	20W	200-1050mA	10-38V	
OT-40/170-240/1A0-1DIMLT2-G1-CE	40W	200-1050mA	15-56V	

## N3535 12 VIOLET Strip Thermal Interface Material Options

IHS has produced a range of high-performance, cost effective Thermal Interface Materials to match perfectly their standard products. Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the Heatsink.

Product	Non Adhesive	Single Sided Adhesive	Double Sided Adhesive
<b>N3535U 12 VIOLET Strip</b>	ILA-TIM-STRIP-280X20-0A	ILA-TIM-STRIP-280X20-1A	ILA-TIM-STRIP-280X20-2A

Other sizes are available, including customised parts.

## Assembly Information

- The mounting of the VIOLET strip has to be on a metal Heatsink.
- In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.



## Safety Information

- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- The mounting of the module is carried out by attaching it to the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.
- To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.
- Observe correct polarity! Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!
- Pay attention to standard ESD precautions when installing the 12 VIOLET Strip.
- The 12 VIOLET strip, as manufactured, has no conformal coating and therefore offers no inherent protection against corrosion.
- Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the Tc junction temperature to within stated ranges.
- To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.
- The evaluation of eye safety occurs according to the standard IEC 62471:2006 ("photobiological safety of lamps and lamp systems"). Within the risk grouping system of this CIE standard, the LED specified in this data sheet falls into the class "moderate risk" (exposure time 0.25s). Under real circumstances (for exposure time, eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. As is also true when viewing other bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment and even accidents, depending on the situation.

## For further information please contact IHS

The values contained in this datasheet can change due to technical innovations. Any such changes will be made without separate notification.

