


# CHAIN TERMINAL Made in Belgium

## STO series [Made in Belgium]

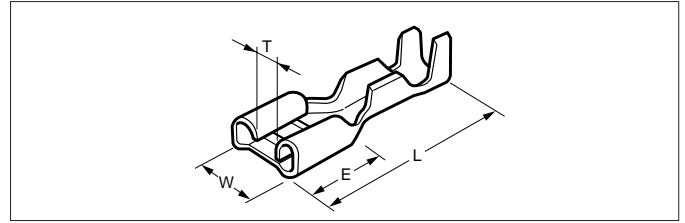


UL Listed file No. E70188 DIN 46247

Model No.	Standard	Applicable wire			Material	Finish	Dimensions mm(in.)					Q'ty / reel	
		mm <sup>2</sup>	AWG #	Insulation O.D. mm(in.)			W	L	E	T	Material thickness		Mating tab thickness
STO-1.0-250N	UL	0.5 to 1.0	20 to 17	2.0 to 3.3(.079 to .130)	Brass	-	7.6 (.299)	19.2 (.756)	7.6 (.299)	1.6 (.063)	0.45 (.018)	0.8 (.031)	6,500
STO-1.0T-250N						Tin-plated							
STO-2.5-250N	UL	1.0 to 2.5	17 to 13	2.7 to 4.3(.106 to .169)	Brass	-	7.6 (.299)	19.2 (.756)	7.6 (.299)	1.6 (.063)	0.45 (.018)	0.8 (.031)	5,000
STO-2.5T-250N						Tin-plated							
STO-6.0-250N	UL	2.5 to 6.0	13 to 9	3.9 to 5.1(.154 to .201)	Brass	-	7.6 (.299)	19.2 (.756)	7.6 (.299)	1.6 (.063)	0.45 (.018)	0.8 (.031)	5,000
STO-6.0T-250N						Tin-plated							
STO-1.0-187N-5	UL	0.5 to 1.0	20 to 17	2.0 to 3.3(.079 to .130)	Brass	-	5.8 (.228)	15.6 (.614)	6.4 (.252)	1.0 (.039)	0.35 (.014)	0.5 (.020)	8,000
STO-1.0T-187N-5						Tin-plated							
STO-1.0-187N-8						-							
STO-1.0T-187N-8						Tin-plated							
STO-0.25-110N-5		0.1 to 0.25	26 to 24	1.3 to 1.5(.051 to .059)		-	3.7 (.146)	14.6 (.575)	6.2 (.244)	0.3 (.012)	0.25 (.010)	0.5 (.020)	15,000
STO-0.25T-110N-5						Tin-plated							
STO-0.25-110N-8						-							
STO-0.25T-110N-8						Tin-plated							
STO-0.5-110N-5	UL	0.25 to 0.5	24 to 20	1.5 to 2.0(.059 to .079)		-	3.7 (.146)	14.6 (.575)	6.2 (.244)	0.3 (.012)	0.25 (.010)	0.5 (.020)	15,000
STO-0.5T-110N-5						Tin-plated							
STO-0.5-110N-8						-							
STO-0.5T-110N-8						Tin-plated							
STO-1.0-110N-5	UL	0.5 to 1.0	20 to 18	2.0 to 3.3(.079 to .130)		-	5.8 (.228)	15.6 (.614)	6.4 (.252)	1.0 (.039)	0.35 (.014)	0.5 (.020)	15,000
STO-1.0T-110N-5						Tin-plated							
STO-1.0-110N-8						-							
STO-1.0T-110N-8						Tin-plated							

Note: Terminals of phosphor bronze or nickel-silver are also available. Contact J.S.T. Europe N.V. for details.

## SFO series [Made in Belgium]

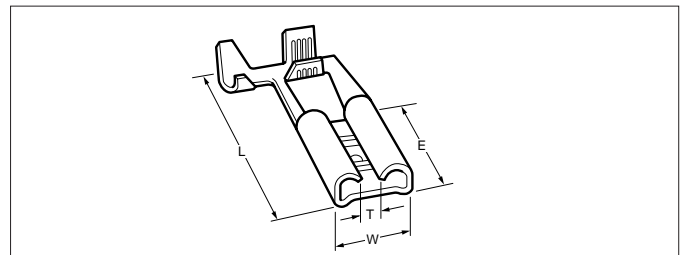

UL Listed file No. E42024


DIN46346

Model No.	Standard	Applicable wire			Material	Finish	Dimensions mm(in.)					Q'ty / reel	
		mm <sup>2</sup>	AWG #	Insulation O.D. mm(in.)			W	L	E	T	Material thickness		Mating tab thickness
SFO-1.0-250N		0.5 to 1.0	20 to 17	2.0 to 3.3(.079 to .130)	Brass	-	7.6 (.299)	14.1 (.555)	7.6 (.299)	2.3 (.091)	0.4 (.016)	0.8 (.031)	4,000
SFO-1.0T-250N						Tin-plated							
SFO-2.5-250N						-							
SFO-2.5T-250N						Tin-plated							

Note: Terminals of phosphor bronze or nickel-silver are also available. Contact J.S.T. Europe N.V. for details.

# CHAIN TERMINAL

## SPB series [Made in Belgium]

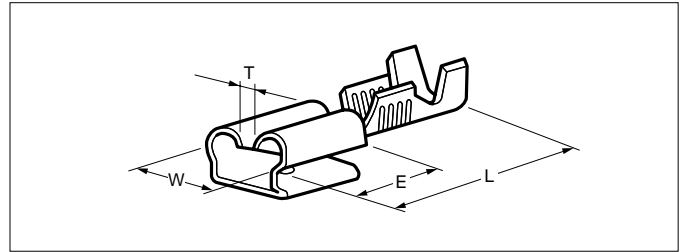


UL Listed file No. E70188 DIN 46345

Model No.	Standard	Applicable wire			Material	Finish	Dimensions mm(in.)						Q'ty / reel
		mm <sup>2</sup>	AWG #	Insulation O.D. mm(in.)			W	L	E	T	Material thickness	Mating tab thickness	
SPB-1.0-250N	UL	0.5 to 1.0	20 to 17	2.0 to 3.3(.079 to .130)	Brass	-	7.6 (.299)	20.5 (.807)	7.7 (.303)	2.2 (.087)	0.39 (.015)	0.8 (.031)	2,500
SPB-1.0T-250N						Tin-plated							
SPB-2.5-250N	UL	1.0 to 2.5	17 to 13	2.7 to 4.3(.106 to .169)	Brass	-							
SPB-2.5T-250N						Tin-plated							

Note: Terminals of phosphor bronze or nickel-silver are also available. Contact J.S.T. Europe N.V. for details.


## MPB series [Made in Belgium]

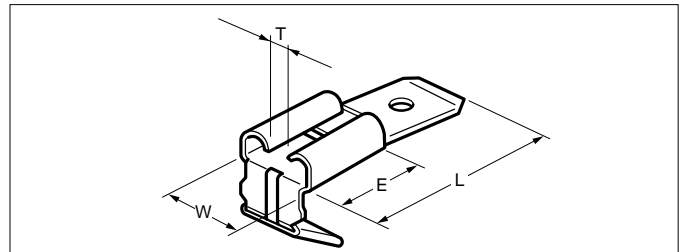

UL Listed file No. E70188 DIN 46347

Model No.	Standard	Material	Finish	Dimensions mm(in.)							Q'ty / reel
				W	L	E	T	Material thickness	Tab thickness	Mating tab thickness	
MPB-250	UL	Brass	-	7.6 (.299)	18.3 (.720)	7.5 (.295)	2.4 (.094)	0.39 (.015)	0.8 (.031)	0.8 (.031)	10,000
MPB-T-250			Tin-plated								

## STI (with DIMPLE) series [Made in Belgium]

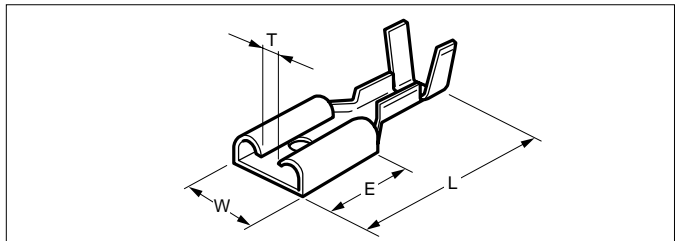

DIN46340

Model No.	Standard	Applicable wire			Material	Finish	Dimensions mm(in.)						Q'ty / reel
		mm <sup>2</sup>	AWG #	Insulation O.D. mm(in.)			W	L	E	T	Material thickness	Mating tab	
STI-1.0-250D		0.5 to 1.0	20 to 17	2.0 to 3.3 (.079 to .130)	Brass	-	7.4 (.291)	20.0 (.787)	7.6 (.299)	1.5 (.059)	0.35 (.014)	SIM	5,000
STI-1.0T-250D						Tin-plated							
STI-2.5-250D		1.0 to 2.5	17 to 13	2.7 to 4.3 (.106 to .169)	Brass	-							
STI-2.5T-250D						Tin-plated							