


C44U_M, Film, Metallized Polypropylene, DC Link, 2100 uF, 10%, 600 VDC

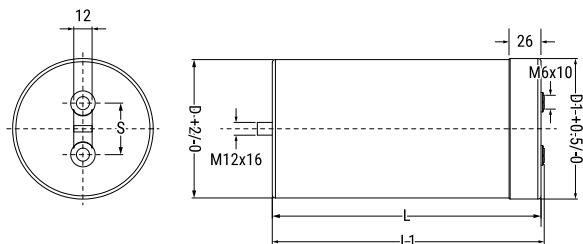

| General Information | |
|---------------------|-------------------------------------------------------|
| Series: | C44U_M |
| Dielectric: | Metallized Polypropylene |
| Style: | Can |
| Features: | DC Filtering, Energy Storage |
| RoHS: | Yes |
| Lead: | Screw Terminals M6 |
| AEC-Q200: | No |
| Miscellaneous: | Thermal Resistance = 2.6 C/W. Weight = 9200 grams. |

| Dimensions | |
|------------|----------------|
| D | 85mm +2mm |
| L | 268.5mm +/-2mm |
| L1 | 270mm +/-2mm |
| S | 32mm +/-0.3mm |

| Packaging Specifications | |
|--------------------------|---------------|
| Mounting: | Bolt - M12x16 |
| Packaging: | Bulk, Bag |
| Packaging Quantity: | 5 |

| Specifications | |
|------------------------|---------------------------------------|
| Capacitance: | 2100 uF |
| Capacitance Tolerance: | 10% |
| Voltage DC: | 600 VDC |
| Temperature Range: | -40/+85°C |
| Rated Temperature: | 75°C |
| Insulation Resistance: | 0.01 MOhms |
| Max dV/dt: | 3 V/us |
| Resistance: | 1.7 mOhms (10kHz) |
| Ripple Current: | 82 Amps (10kHz 40C), 6900 Amps (Peak) |
| Inductance: | 80 nH |