


**CIRCUIT DIAGRAM**

C: COMMON PIN  
BOTTOM VIEW




non-shorting

**Specifications:**

- Contact rating: 0.1A, 12V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -10°C to +60°C
- Mechanical life: 10 000 cycles
- Operating force: 200gf +/-100gf
- Material: Spring plate: PBS, washing  
Contact clip: PBS, silver plated  
Slider: PA46, black  
Terminal: brass, silver plated  
Base: phenolic resin, natural  
Frame: SPCC, Sn

**HOLE LAYOUT**  $\pm 0.05$



Tolerances: up to 10: $\pm 0.2$ mm above 10-50: $\pm 0.3$ mm	Date	Name
	08/06	dr

**MFP 113 D**

**knitter-switch**

**30 09 57**


Page

1/2

Tolerances	05/10	dr
Modifications	Date	Name

Soldering conditions:

Temperature profile of reflow soldering

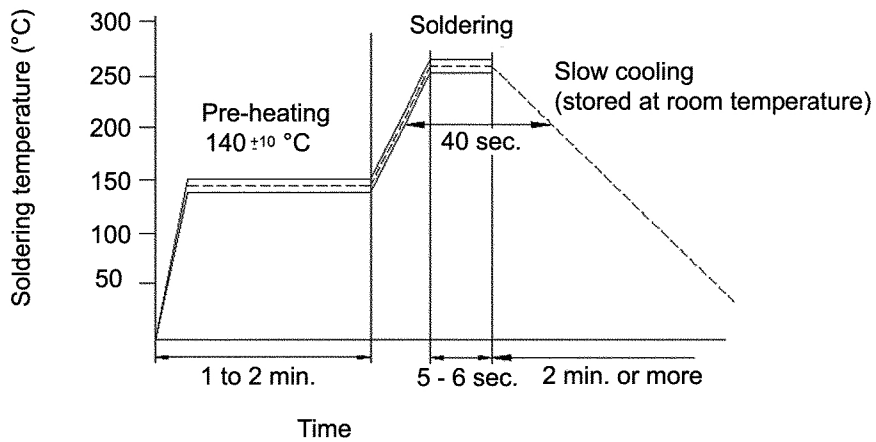

Peak: 260 +/-3°C; 5 - 6sec. / 220 +/-5°C; 40sec.



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	<h1>MFP 113 D</h1>
			08/06	dr	
			<b>knitter-switch</b>		<h2>30 09 57</h2>
Modifications			Date	Name	Page 2/2