

## PRODUCT DATASHEET QT 2X58 DIM

QUICKTRONIC DIM T8 | ECG for FL and CFL, dimmable 1...10 V



### AREAS OF APPLICATION

- Suitable for use in emergency lighting systems as per EN 50172/DIN VDE 0108-100
- Installation in emergency lighting systems according to IEC 61347-2-3, appendix J
- Industry
- Open-plan offices, corridors and storage rooms
- Public buildings
- Suitable for luminaires of protection class I

### PRODUCT FAMILY BENEFITS

- Same luminous flux with direct and alternating current
- Perfect lamp start for applications with motion sensors
- Dimming of amalgam lamps without flickering or reduced lifespan
- Very high energy efficiency due to cut-off technology
- Automatic restart after lamp replacement
- ECGs comply with MINERGIE standard due to very low standby consumption

### PRODUCT FAMILY FEATURES

- Control via 1...10 V interface
- Supply voltage: 220...240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198...264 V
- Dimming range: 1...100 % luminous flux
- Lamp start: within 0.6 s
- Lifetime: > 100,000 h (for T = 65 °C at T<sub>c</sub>)
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Energy Efficiency Index EEI: A1 BAT
- Power boost for stable lamp operation
- Overtemperature protection: Thermal management at high t<sub>c</sub> temperatures

– Safety: to EN 61347-2-3

**TECHNICAL DATA**

Electrical data

<b>Input voltage AC</b>	198...264 V
<b>Nominal voltage</b>	220...240 V
<b>Mains frequency</b>	50...60 Hz
<b>Input voltage DC</b>	154...276 V
<b>Operating frequency</b>	44...120 kHz
<b>Max. ECG no. on circuit breaker 10 A (B)</b>	8 <sup>1)</sup>
<b>Max. ECG no. on circuit breaker 16 A (B)</b>	13 <sup>1)</sup>
<b>Inrush current</b>	45 A

<sup>1)</sup> Type B

Light technical data

<b>Starting time</b>	0.6 s
----------------------	-------

Dimensions & weight



<b>Length</b>	423.0 mm
<b>Width</b>	30.0 mm
<b>Height</b>	21.0 mm
<b>Mounting hole spacing, length</b>	415.0 mm
<b>Product weight</b>	330.00 g
<b>Wire preparation length, input side</b>	8.0...9.0 mm <sup>1)</sup>
<b>Wire preparation length, output side</b>	8.0...9.0 mm <sup>1)</sup>

<sup>1)</sup> Combi wiring

Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+60 °C
<b>Permitted rel. humidity during operation</b>	5...85 %

## Lifespan

<b>ECG lifetime</b>	100000 h <sup>1)</sup>
---------------------	------------------------

<sup>1)</sup> At  $T_{case} = 65^{\circ}C$  at  $T_c$  point / 10% failure rate

## Expected Lifetime

Product name	Lamp group				
QT 2X58 DIM	L 58 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	60	70	75
		Lifetime [h]	100000	100000	80000

## Capabilities


<b>Dimming interface</b>	1...10 V
<b>Dimming range</b>	1...100 % <sup>1)</sup>
<b>Dimmable</b>	Yes
<b>Overload protection</b>	Yes
<b>Overheating protection</b>	Yes
<b>Suitable for fixtures with prot. class</b>	I
<b>End of lamp life safety shutdown</b>	EOL T.2

<sup>1)</sup> Luminous flux

## Certificates & standards





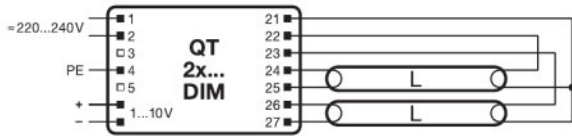





<b>Approval marks – approval</b>	VDE / VDE-EMC / EAC / CCC
<b>Standards</b>	Acc. to EN 55015; EN 55022Acc. to EN 61547Acc. to IEC 61000-3-2/EN 61000-3-2
<b>EEI – Energy Label</b>	A1 BAT
<b>Protection class</b>	I
<b>Type of protection</b>	IP20

Wiring Diagram



Wiring diagram

DOWNLOAD DATA

File	
	Addon Technical Information 502785_ECG lifetime - QUICKTRONIC (DALI) DIM
	Certificates 554891_EAC PT family
	Certificates 335097_INOTEC
	Declarations of conformity 709432_Declaration of Conformity
	Installation/Operation notice 493509_Technical application guide QUICKTRONIC Intelligent DALI DIM (GB)
	Operating instructions 592415_EAC-QT T8 DIM
	CAD data 3-dim 545739_QT DIM 2x
	CAD data 3-dim 545740_QT DIM 2x
	CAD data 3-dim 545742_QT DIM 2x
	CAD data PDF 545736_QT DIM 2x

---

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321645821	Shipping carton box 20	447 mm x 160 mm x 101 mm	6794.00 g	7.22 dm <sup>3</sup>

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## QUICKTRONIC DIM T8 | ECG for FL and CFL, dimmable 1...10 V

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
QT 2X58 DIM	L 58 W	0.48 A	110.00 W	5000 lm	2