

DIN rail perforated - NS 15 PERF 1000MM - 1207646

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail perforated, Standard profile, width: 15 mm, height: 5.5 mm, in acc. with EN 60715: 2001, material: Steel, galvanized, passivated with a thick layer, length: 1000 mm, color: silver

RoHS

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	20 STK
GTIN	 4 046356 366045
GTIN	4046356366045
Custom tariff number	72166190
Country of origin	Germany

Technical data

Dimensions

Height	5.5 mm
Length	1000 mm
Width	15 mm
Hole width	12.20 mm
Hole height	4.20 mm
Drill hole spacing	20.00 mm

General

Material	Steel
Coating	galvanized, passivated with a thick layer
Color	silver

DIN rail perforated - NS 15 PERF 1000MM - 1207646

Technical data

Standards and Regulations


Test standard	in acc. with EN 60715: 2001
Connection in acc. with standard	IEC/EN

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

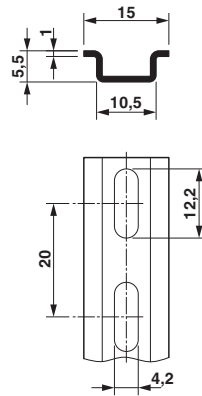

Classifications

eCl@ss

eCl@ss 4.0	23150301
eCl@ss 4.1	23150301
eCl@ss 5.0	27141143
eCl@ss 5.1	27141143
eCl@ss 6.0	27141143
eCl@ss 7.0	27141143
eCl@ss 8.0	27400602
eCl@ss 9.0	27400602

ETIM

ETIM 2.0	EC001285
ETIM 3.0	EC001285
ETIM 4.0	EC000212
ETIM 5.0	EC000212

DIN rail perforated - NS 15 PERF 1000MM - 1207646

Classifications

ETIM

ETIM 6.0	EC001285
----------	----------

UNSPSC

UNSPSC 6.01	30212109
UNSPSC 7.0901	39121708
UNSPSC 11	39121708
UNSPSC 12.01	39121708
UNSPSC 13.2	39121708