


# D-Sub Connector

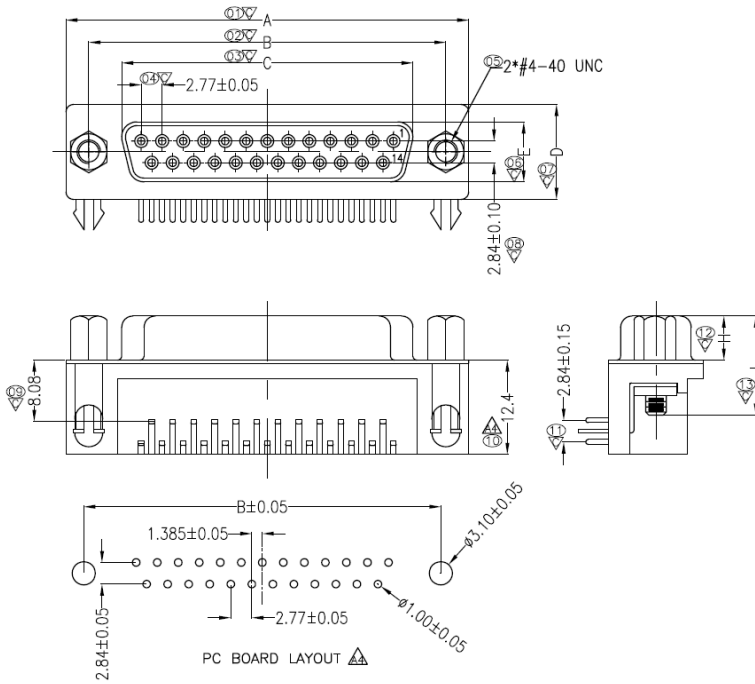

- NOTES:
- MATERIAL:
    - HOUSING: PBT UL94V-0;
    - TERMINAL: BRASS;
    - SHELL: COLD ROLLER STEEL;
    - SCREW: BRASS PLATED NICKEL.
  - SPECIFICATION:
    - CURRENT RATING: 1A MAX PER PIN;
    - CONTACT RESISTANCE (LOW LEVEL): 25mOHM MAX. INITIAL;
    - INSULATION RESISTANCE: 500M OHM MIN AT DC 500V;
    - DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC;
    - OPERATING TEMPERATURE: -55°C TO 105°C;
  - ALL DIMENSION MARKED  $\nabla$  MUST BE CONTROLLED BY QIP.
  - ALL DIMENSION MARKED  $\otimes$  SHOULD BE MEASURED BY FAI.

RND Part Number	A $\pm 0.35$	B $\pm 0.25$	C $\pm 0.25$	D $\pm 0.25$	E $\pm 0.10$
RND 205-00769	30.80	25.00	16.30	12.50	7.90
RND 205-00772	39.20	33.30	24.60	12.50	7.90
RND 205-00774	53.05	47.05	38.30	12.50	7.90
RND 205-00775	69.40	63.50	54.80	12.50	7.90