


D-Sub Connector

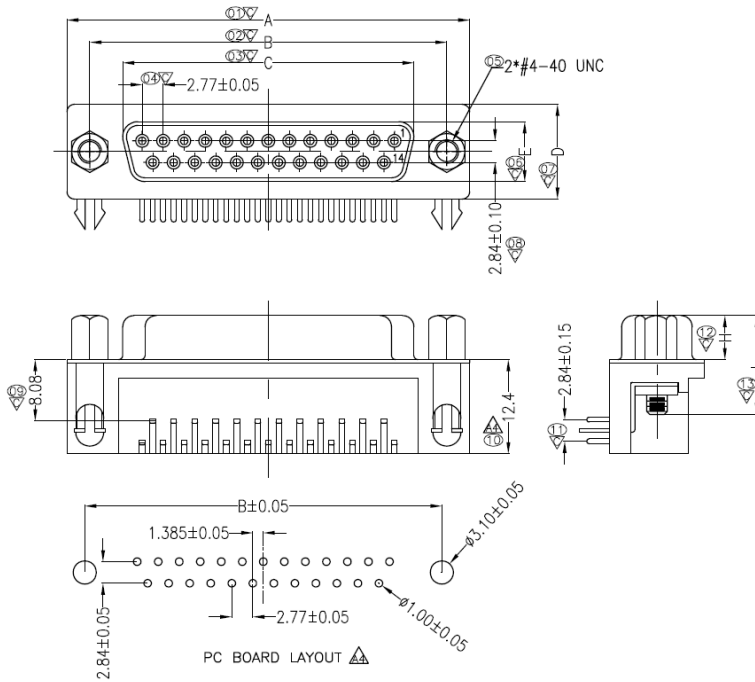

NOTES:

1. MATERIAL:
 - 1.1. HOUSING: PBT UL94V-0;
 - 1.2. TERMINAL: BRASS;
 - 1.3. SHELL: COLD ROLLER STEEL;
 - 1.4. SCREW: BRASS PLATED NICKEL.
2. SPECIFICATION:
 - 2.1. CURRENT RATING: 1A MAX PER PIN;
 - 2.2. CONTACT RESISTANCE (LOW LEVEL): 25mOHM MAX. INITIAL;
 - 2.3. INSULATION RESISTANCE: 500M OHM MIN AT DC 500V;
 - 2.4. DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC;
 - 2.5. OPERATING TEMPERATURE: -55°C TO 105°C;
3. ALL DIMENSION MARKED ∇ MUST BE CONTROLLED BY QIP.
4. ALL DIMENSION MARKED \otimes SHOULD BE MEASURED BY FAI.

RND Part Number	A ± 0.35	B ± 0.25	C ± 0.25	D ± 0.25	E ± 0.10
RND 205-00769	30.80	25.00	16.30	12.50	7.90
RND 205-00772	39.20	33.30	24.60	12.50	7.90
RND 205-00774	53.05	47.05	38.30	12.50	7.90
RND 205-00775	69.40	63.50	54.80	12.50	7.90