


D-Sub Connector

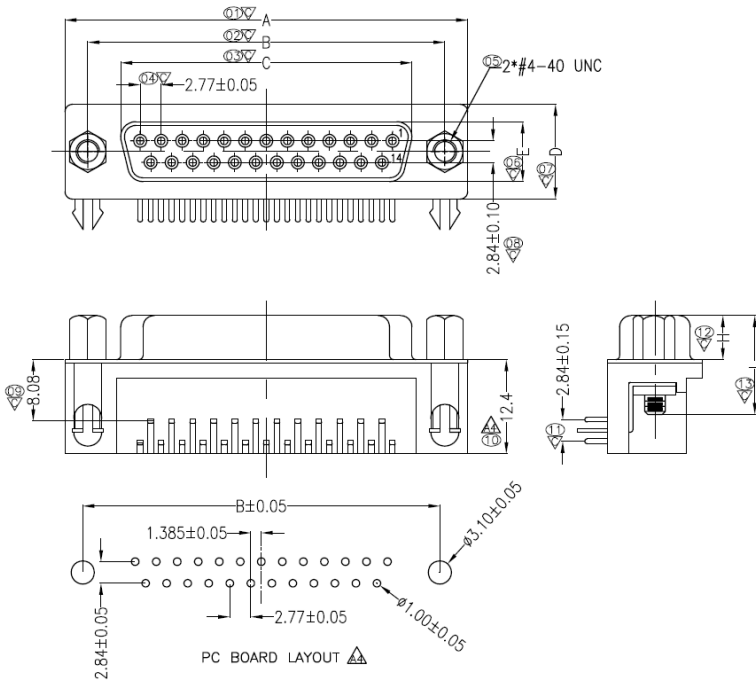

- NOTES:
- MATERIAL:
 - HOUSING:PBT UL94V-0;
 - TERMINAL:BRASS;
 - SHELL:COLD ROLLER STEEL;
 - SCREW:BRASS PLATED NICKEL.
 - SPECIFICATION:
 - CURRENT RATING: 1A MAX PER PIN;
 - CONTACT RESISTANCE(LOW LEVEL):25mOHM MAX.INITIAL;
 - INSULATION RESISTANCE:500M OHM MIN AT DC 500V;
 - DIELECTRIC WITHSTANDING VOLTAGE:1000VAC;
 - OPERATING TEMPERATURE: -55°C TO 105°C;
 - ALL DIMENSION MARKED ∇ MUST BE CONTROLLED BY QIP.
 - ALL DIMENSION MARKED \otimes SHOULD BE MEASURED BY FAI.

RND Part Number	A±0.35	B±0.25	C±0.25	D±0.25	E±0.10
RND 205-00769	30.80	25.00	16.30	12.50	7.90
RND 205-00772	39.20	33.30	24.60	12.50	7.90
RND 205-00774	53.05	47.05	38.30	12.50	7.90
RND 205-00775	69.40	63.50	54.80	12.50	7.90