

Crimp Terminal Housings, 2mm






Specification

Current Rating	2A AC,DC
Voltage Rating	100V AC/max
Operating Temperature	-25°C...85°C
Insulation Resistance	1000MΩ/min
Dielectric Withstanding Voltage	800V AC/min
Contact Resistance	20mΩ/max
Material	Nylon 66, UL94V-0

Product Range:

	Poles
RND 205-00948	2
RND 205-00949	3
RND 205-00950	4
RND 205-00951	5
RND 205-00952	6
RND 205-00953	7
RND 205-00954	8

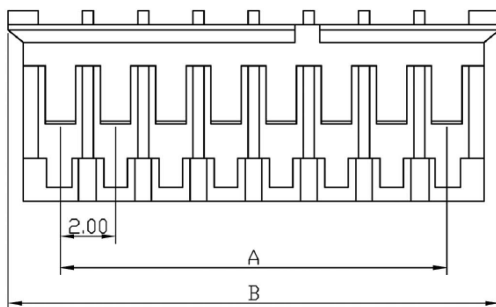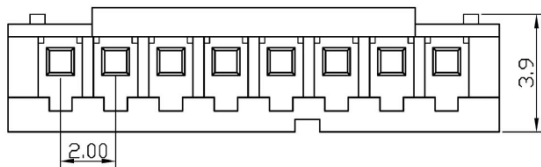

Poles	Dimensions mm (in.)	
	A	B
2	2.0 (0.079)	5.8 (0.228)
3	4.0 (0.157)	7.8 (0.307)
4	6.0 (0.236)	9.8 (0.389)
5	8.0 (0.315)	11.8 (0.465)
6	10.0 (0.394)	13.8 (0.543)
7	12.0 (0.472)	15.8 (0.622)
8	14.0 (0.551)	17.8 (0.701)