

Crimp Terminal Housings, 2mm





Specification

Current Rating	3A AC,DC
Voltage Rating	250V AC/DC
Operating Temperature	-25°C...85°C
Insulation Resistance	1000MΩ/min
Dielectric Withstanding Voltage	800V AC/min
Contact Resistance	20mΩ/max
Material	Nylon 66, UL94V-0
Colour	White

Product Range:

	Poles
RND 205-00962	2
RND 205-00963	3
RND 205-00964	4

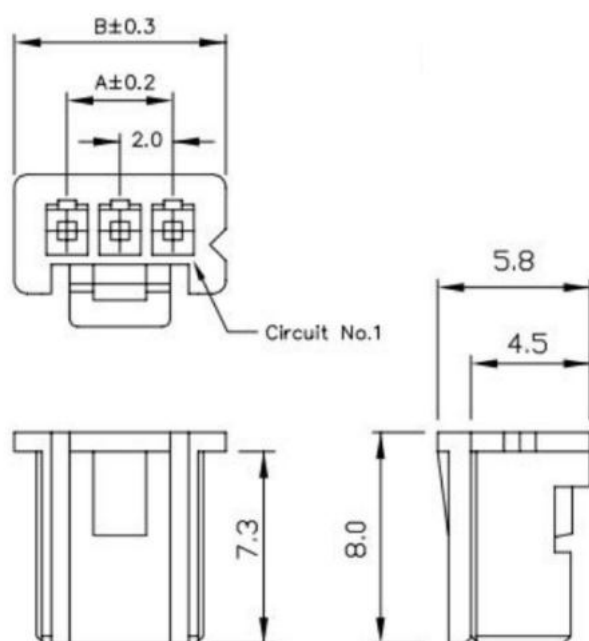

Poles	Dimensions mm (in.)	
	A	B
2	2.0 (0.079)	6.0 (0.236)
3	4.0 (0.157)	8.0 (0.315)
4	6.0 (0.236)	10.0 (0.394)

Crimp Terminal Housings, 2mm





Specification

Current Rating	3A AC,DC
Voltage Rating	250V AC/DC
Operating Temperature	-25°C...85°C
Insulation Resistance	1000MΩ/min
Dielectric Withstanding Voltage	800V AC/min
Contact Resistance	20mΩ/max
Material	Nylon 66, UL94V-0
Colour	White

Product Range:

	Poles
RND 205-00965	5
RND 205-00966	6
RND 205-00967	8

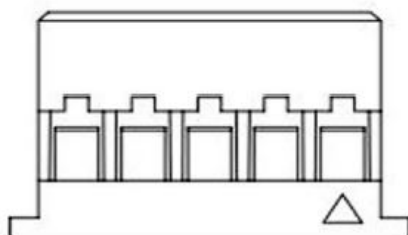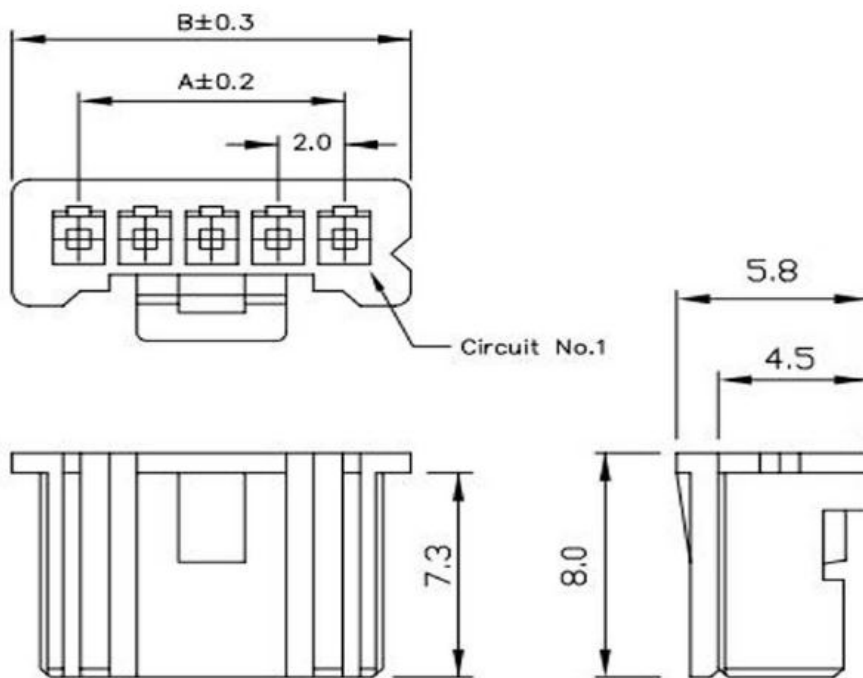

Poles	Dimensions mm (in.)	
	A	B
5	8.0 (0.315)	12.0 (0.472)
6	10.0 (0.394)	14.0 (0.551)
8	14.0 (0.551)	18.0 (0.709)