


Plug-In Bridge

Features


- ROHS compliant
- Made from high quality materials
- 5.2 mm pitch between contacts
- Designed for bridging terminal blocks

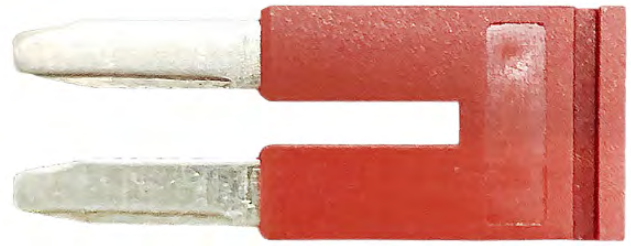

Specification


Colour	Red
Current Rating	20 A
Insulating Body Material	PA66
Terminal Material	Copper, Tin Plated
Pitch	5.2 mm

Drawing

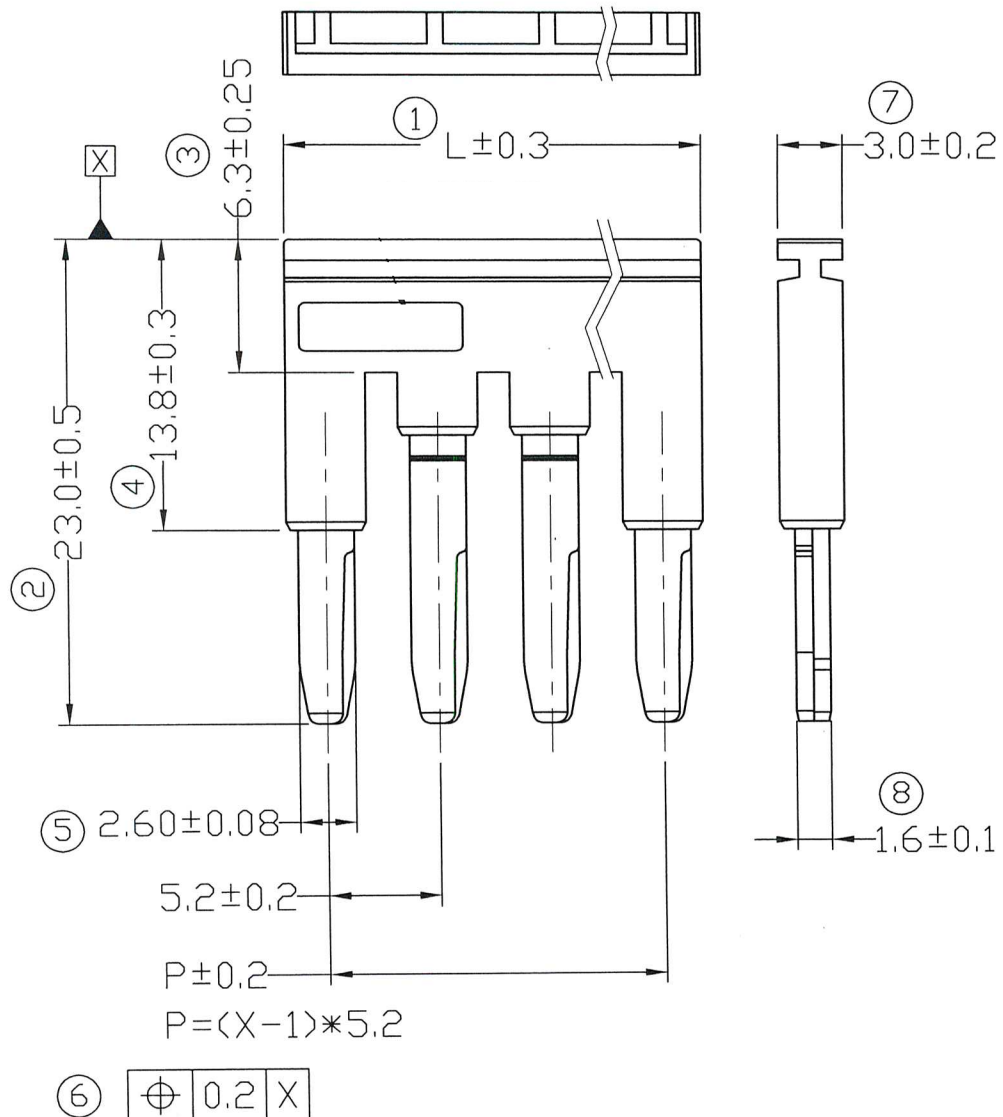

Article Nr.	Number of Poles	L
RND 205-01338	2	8.9 mm
RND 205-01339	3	14.1 mm
RND 205-01340	4	19.3 mm

RND Din-Rail Terminal Block Assortment



Screw Clamp Terminal Block

Art Nr. - Wire Range, Colour

RND 205-01319 - 0.5 ... 2.5mm², Grey
RND 205-01320 - 0.5 ... 2.5mm², Blue
RND 205-01321 - 0.5 ... 2.5mm², Orange
RND 205-01322 - 0.5 ... 2.5mm², Beige
RND 205-01323 - 0.5 ... 2.5mm², Red
RND 205-01324 - 0.5 ... 2.5mm², Black
RND 205-01325 - 0.5 ... 4mm², Grey
RND 205-01326 - 0.5 ... 4mm², Blue
RND 205-01327 - 0.5 ... 6mm², Grey
RND 205-01328 - 0.5 ... 6mm², Blue
RND 205-01329 - 1.5 ... 10mm², Grey
RND 205-01330 - 1.5 ... 10mm², Blue



Ground Terminal Blocks

Art Nr. - Wire Range

RND 205-01331 - 0.5 ... 2.5mm²
RND 205-01332 - 0.5 ... 4mm²
RND 205-01333 - 0.5 ... 6mm²
RND 205-01334 - 1.5 ... 10mm²