


SPECIFICATIONS:

ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC.
INSULATION RESISTANCE: 500VDC 100MΩ min.
DIELECTRIC STRENGTHS: 1,500VAC for 1 minute.
SOLDERING TEMPERATURE: Hand soldering 350°C for max. 3.sec.
OPERATING TEMPERATURE: -20°C to +85°C.
PROTECTION CLASS: IP67 front panel.


MATERIALS:

BASE: PBT UL94V-0.
ACTUATOR: PC (Hard surface).
COVER: Nylon 66 UL 94V-0.
ACTUATOR BLOCK: PC UL94V-0.
PIVOT PIN: PBT UL94V-0.
SPRING: Stainless steel.
CONTACT: Copper, silver rivet.
TERMINAL: Brass, tin plated.
SEAL: Silicone.
LAMP: LED.

Art. Nr.
RND 210-00529



Panel Cutout

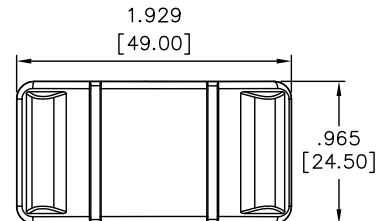

Hard Actuator in Black

