

Miniature Toggle Switch




Specification

| | |
|-----------------------|--|
| Contact Configuration | 1CO |
| Contact Rating | 5 A @ 125 VAC or 28 VDC, 2 A @ 250 VAC |
| Electrical Life | 50000 Make and Break Cycles at Full Load |
| Insulation Resistance | 1 GOhm min. |
| Contact Resistance | 10 mOhm max initial. @ 2 ... 4 VDC |
| Dielectric Strength | 1.5 kV RMS @ Sea Level |
| Operating Temperature | -30 ... 85 °C |
| Switching Function | ON-ON |
| Actuator Height | 10.4 mm |
| Termination Type | Solder Lug |
| Bushing | 9 mm High, Keyway |

Material Specification

| | |
|---------------------------|----------------------------|
| Contact Material | Silver |
| Terminal Plating Material | Silver |
| Case Material | Diallyl Phthalate, UL94V-0 |
| Toggle Handle Material | Brass Chrome Plated |
| Bushing Material | Brass, Nickel Plated |
| Switch Support Material | Brass, Tin Plated |
| Housing Material | Stainless Steel |

Drawing

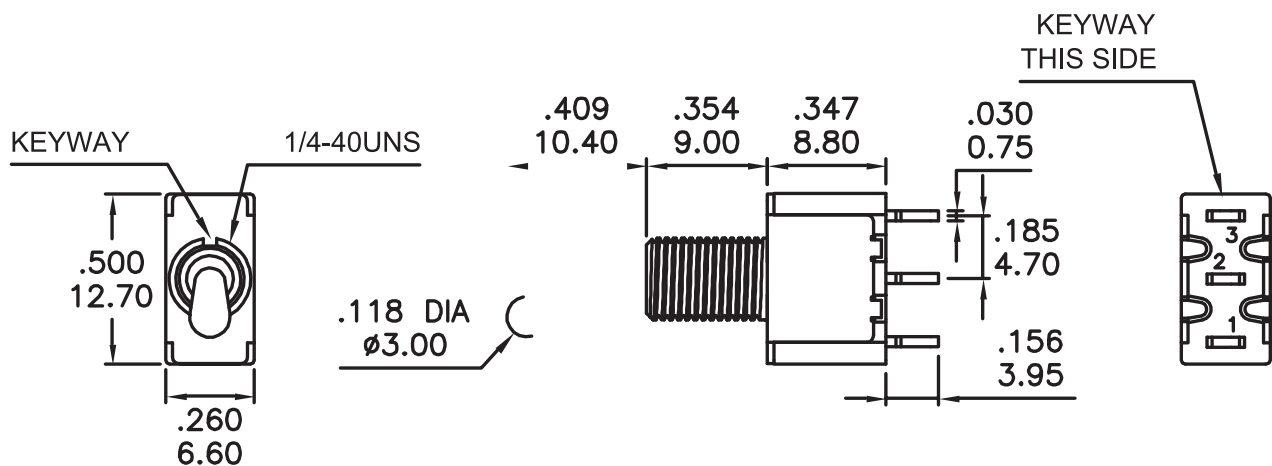

Art Nr.
RND 210-00667