

Miniature Toggle Switch




Specification

Contact Configuration	2CO
Contact Rating	5 A @ 125 VAC or 28 VDC, 2 A @ 250 VAC
Electrical Life	50000 Make and Break Cycles at Full Load
Insulation Resistance	1 GOhm min.
Contact Resistance	10 mOhm max initial. @ 2 ... 4 VDC
Dielectric Strength	1.5 kV RMS @ Sea Level
Operating Temperature	-30 ... 85 °C
Switching Function	ON-ON
Actuator Height	12.6 mm
Termination Type	PC, Through Hole
Bushing	6.35 mm High, Unthreaded


Material Specification

Contact Material	Silver
Terminal Plating Material	Gold Over Silver
Case and Bushing Material	Nylon 9T, UL94V-0
Actuator Material	Brass Chrome Plated
Terminal Seal Material	Epoxy
Switch Support Material	Brass, Tin Plated

Drawing

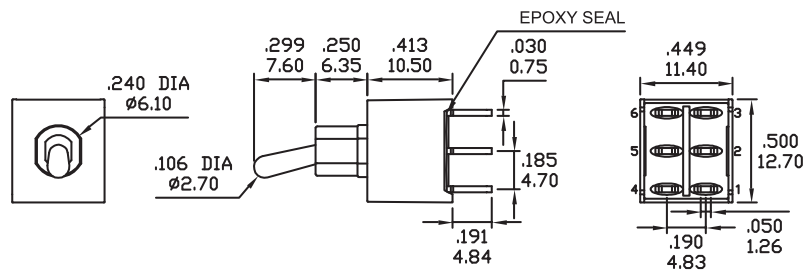

WIRING FOR ON-ON-ON (3-WAY) FUNCTION

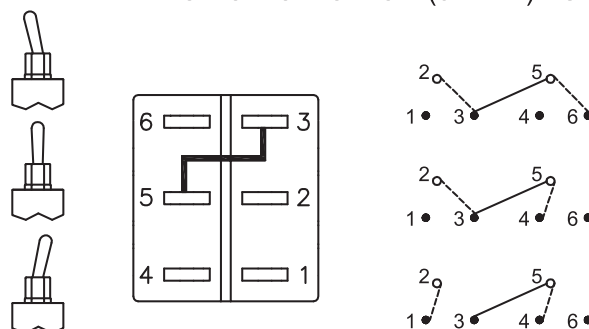

Art Nr.
RND 210-00671