

SPECIFICATIONS:

CONTACT RATING: 20A 125VAC 16A 250VAC.

CONTACT RESISTANCE: 20m-ohms.

INSULATION RESISTANCE: DC 500V 1000M-ohms min.

DIELECTRIC STRENGTHS: AC 1500V 1 min.

MATERIALS:

HOUSING: 66 Nylon(UL 94V-2).

ACTUATOR: 66 Nylon(UL 94V-2).

MOVABLE CONTACTS: Copper, silver plated.



STATIONARY CONTACTS: Copper, silver plated.

TERMINALS: Copper, silver plated.

CONTACT SPRING: Piano wire.

Art. Nr.

RND 210-00552

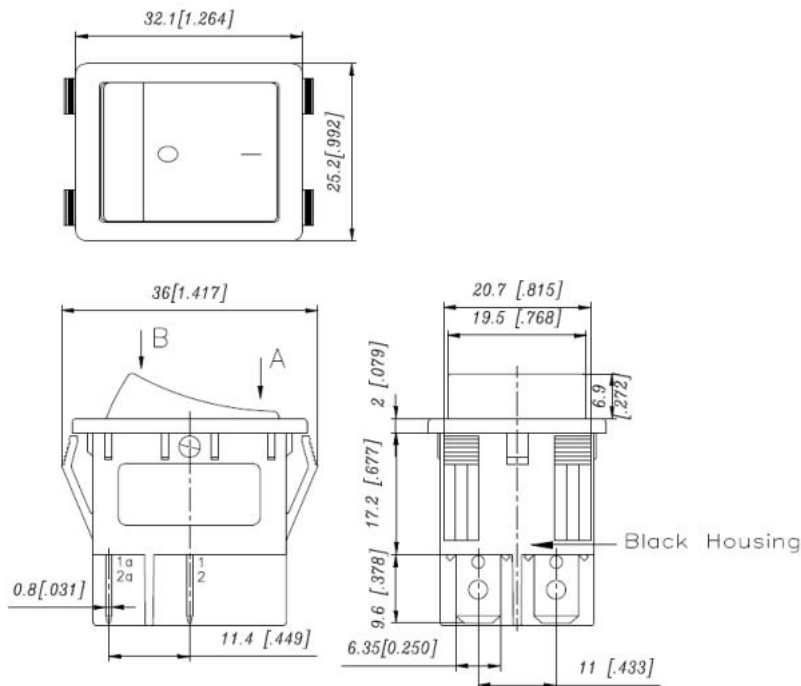

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
DPST	1-1a 2-2a	—	OFF