

Electromechanical Buzzer

Features


- ROHS compliant
- Low power consumption
- PCB mountable



Specification

Rated Voltage (Vp-p square wave)	1.5 Vp-p
Operating Voltage Min.	1 V
Operating Voltage Max.	3 V
Rated Current	15 mA
Coil Resistance	42±6 Ω
Coil Impedance at 2048 Hz	120 Ω
Sound Output at 2048 Hz at 100 mm	≥ 80 dB
Resonant Frequency	2048 Hz
Operating Temperature Min.	-20 °C
Operating Temperature Max.	70 °C
Storage Temperature Min.	-30 °C
Storage Temperature Max.	80 °C
Weight	2 g

Requires additional electronic circuitry to operate as a sounder

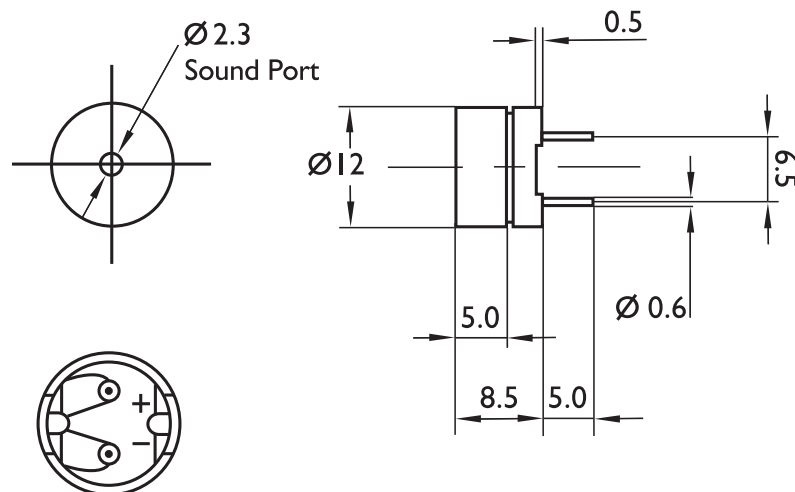

Dimensions Unit: mm Tolerance: ±0.5mm

Art. Nr.
RND 430-00013