

Electromechanical Buzzer

Features

- ROHS compliant
- Black in colour
- Sealed base
- Wave solderable and washable
- Housing material: Noryl




Specification

Rated Voltage (Vp-p square wave)	12 Vp-p
Operating Voltage Min.	9 V
Operating Voltage Max.	15 V
Rated Current	≤40 mA
Coil Resistance	115±3 Ω
Sound Output at 2048 Hz at 100 mm*	≥ 85 dB
Resonant Frequency	2048 Hz
Operating Temperature Min.	-20 °C
Operating Temperature Max.	70 °C
Storage Temperature Min.	-30 °C
Storage Temperature Max.	80 °C
Weight	2 g

*Value applying at rated voltage (AC)

Requires additional electronic circuitry to operate as a sounder

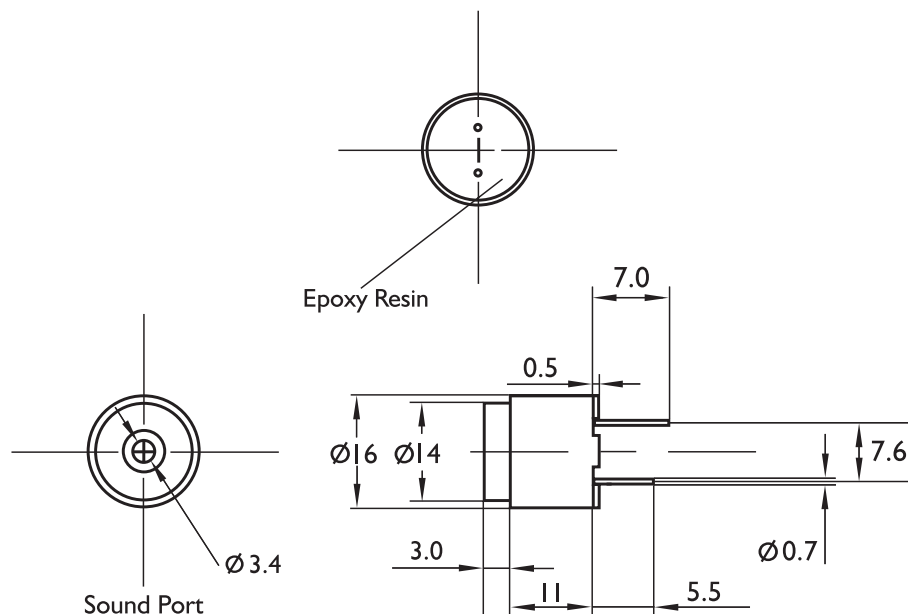

Dimensions Unit: mm Tolerance: ±0.5mm

Art. Nr.
RND 430-00020